PT SAPTAINDRA SEJATI

FINAL DRIVE LH

RECEIVING INSPECTION

CHECKSHEET

MACHINE MODEL

D155A-6

RO NO :

POWERTRAIN SECTION

adaro SERVICES

PT.SAPTA INDRA SEJATI
PLANT REBUILD CENTER

RECIVING CHECK SHEET	WO. NO		DOCUMENT NO	
FINAL DRIVE LH	CODE. UNIT		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
D 155A - 6	JOB SITE		PAGE	

✓ : GOOD CONDITION   X : BAD CONDITION   ⊗ : NONE

SKETCH DRAWING OR PHOTOES

Front Side View

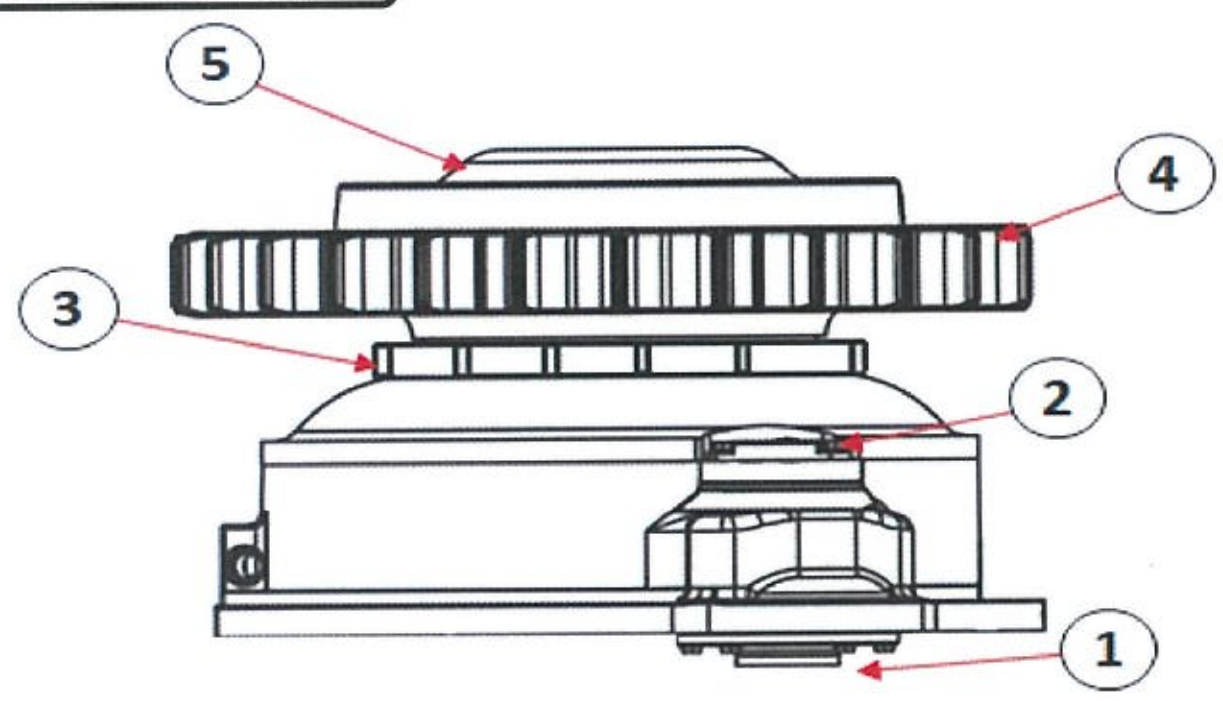

Right Side View

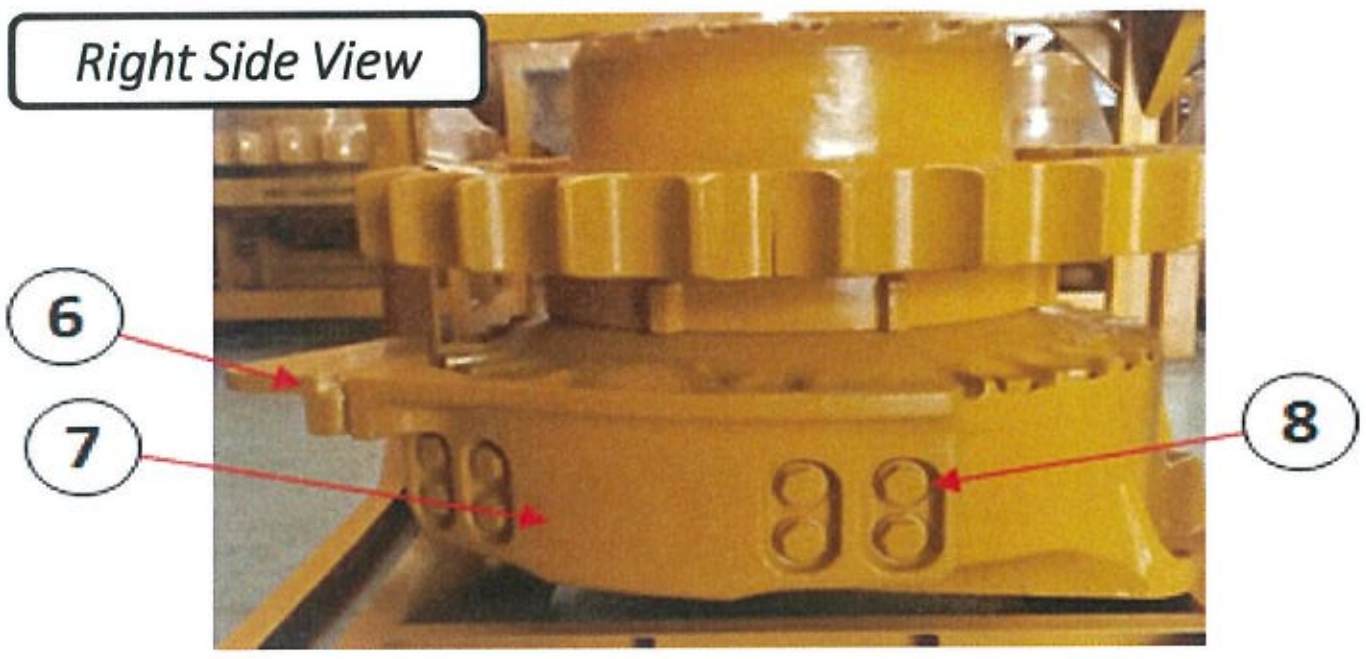

Top Side View

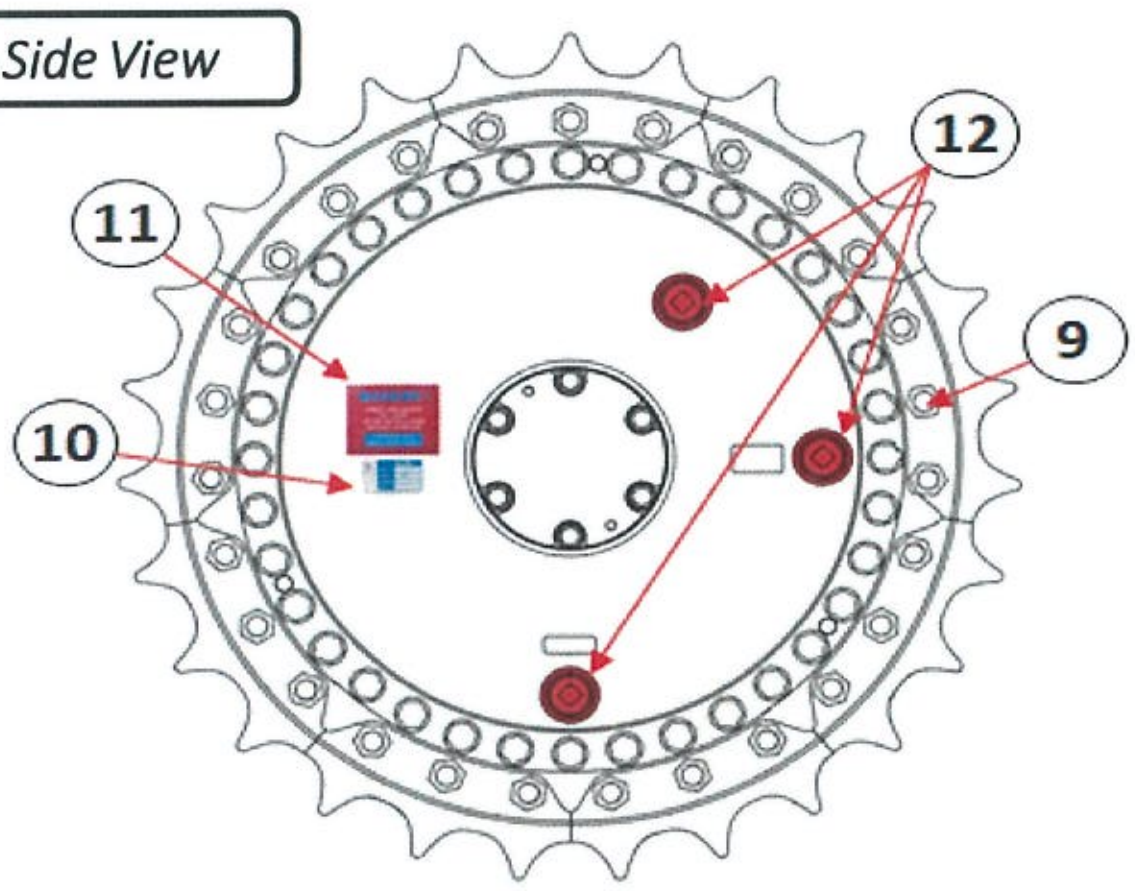

NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

NO	ITEM	CHECK	REMARK
1	Hole protection		
2	Bolt cover		
3	Retainer		
4	Sprocket		
5	Cover		
6	Rock Destroiyer		
7	Guard		
8	Bolt Guard		
9	Bolt Sprocket		
10	Name plate		
	COMP. S/N		
11	Warning(Sticker)		
12	Plug		
	Warning (Sticker)		
	Painting condition		
	Packing / wraping		
	Stand		
	Bolt stand		

Note :

INSPECTION BY	CHECK BY	CHECK BY	APPROVED BY
QA INSPECTOR	QA COORDINATOR	GL/SPV PROD	PPC

PT SAPTAINDRA SEJATI

FINAL DRIVE LH

VISUAL & MEASUREMENT

CHECKSHEET

MACHINE MODEL

D155A-6

RO NO :

POWERTRAIN SECTION

PT.SAPTA INDRA SEJATI
PLANT REBUILD CENTER

VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE LH D 155A - 6	WO NUMBER		DOCUMENT NO	RC/QR03/PT/02/05
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	1 of 2

PROCESS	**START**		**INSPECTION BY**		
	FINISH				

NO	**PART NAME**	**CHECKING POINT**	**SKECTH DRAWING OR PHOTOES**	**VISUAL CHECK & MEASUREMENT**	**DECISION** U/A	U/R	R/N
1	Case 17A-27-41121	1. Bearing fitting portion 2. Bearing fitting portion 3. Matting face 4. cage fitting portion		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
2	Hub 17A-27-41230	1. Thread fitting portion 2. Bearing fitting portion All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
3	Gear 17A-27-41241	1. side contact surface 2. External gear teeth All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
4	Gear 17A-27-41251 Pin 17A-27-41280 Spacer 154-27-72320	1. Bearing fitting portion 2. carrier contact surface 3. Matting face All round		Contens / 1 / 2 / 3 Normal Crack Scratch Broken Abn wear ***Remark***	1 2 3		
5	Carrier 17A-27-41160	1. Internal spline teeth 2. Spacer contact surface 3. Pin fitting portion All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
6	Gear 17A-27-41220	1. External gear teeth 2. Spacer contact surface All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			

PT.SAPTA INDRA SEJATI
PLANT REBUILD CENTER

VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE LH D 155A - 6				
	WO NUMBER		DOCUMENT NO	RC/QR03/PT/02/05
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	2 of 2

PROCESS			INSPECTION BY		
	START				
	FINISH				

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT	DECISION U/A	DECISION U/R	DECISION R/N
7	Gear 17A-27-41260	1. External spline teeth 2. Internal gear teeth 3. Side contact surface All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
8	Cover 17A-27-41130	1. Bearing fitting portion 2. Floating seal Fitting portion 3. Internal spline teeth 4. Oring groove All round Thread portion		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
9	Cover 17A-27-42760 17A-27-42750	1. Floating seal fitting portion 2. Oring groove All round		Contens / A / B Normal Crack Scratch Broken Abn wear ***Remark***	A: B:	A: B:	A: B:
10	Pinion 17A-27-41210	1. Bearing fitting surface 2. Internal spline teeth 3. External Gear teeth Seal contact surface All round		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			
11	Cage 17A-27-41171	1. Cage contact surface 2. Oring groove 3. Bearing fitting surface All round Shim contact surface		Contens / Act Normal Crack Scratch Broken Abn wear ***Remark***			

Note : ______________________________

____

____

INSPECTION BY | **APPROVED BY**

MECHANIC | **GL /QA**

PT SAPTAINDRA SEJATI

FINAL DRIVE LH ASSEMBLY

CHECKSHEET

MACHINE MODEL

D155A-6

RO NO :

POWERTRAIN SECTION

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6	UNIT MODEL	D155A-6	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	1 of 6

PROCESS	START		ASSEMBLY BY	
	FINISH			

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
1	OIL SEAL AND OUTER RACE ASSEMBLY	- Clean all part,check for dirt or damage - Coat the sliding surface of each part with engine oil before installing - Install Oil seal to case take care of its direction and apply sealant * Oil seal lip : grease (G2-L1) * Oil seal outside : gasket sealant (LG-5)	Using tool K4,Press fit oil seal (56) to case (36) RANDOM ITEM CHECK Name : / Name : QA INSPECTOR / PROD. SUPERVISOR				
		- Install outer race bearing to case Act. : ton	Using tool K5,Press fit outer race (55) to case (36) * Press fit force (0.1 -1.4 ton)				
2	GEAR ASSEMBLY	- Install Inner race bearing upper and lower to gear Act. : ton - Install gear assy to case	Using push tool 11,Press fit inner race bearing (52) and (53) to gear (54) * Press fit force (0.6 -1.7 ton)				
3	CAGE ASSEMBLY	- Install Oil seal to cage take care of its direction and apply sealant * Oil seal lip : grease (G2-L1) * Oil seal outside : gasket sealant (LG-5)	Using tool K4,Press fit oil seal (49) to cage (47)				
		- Install outer race bearing to cage Act. : ton	Using tool K5,Press fit outer race (48) to case (47) * Press fit force (0.1 -1.4 ton)				
		- Fit the oring to cage assembly - Install cage assy to case * Lower it gradually not to damage the oil seal lip					
		- Adjust of shim * Adjust the pinion bearing clearence according to the following procedure - Tighten mounting bolt D,E,G,H Act. : kgm	Std torque 2 kgm				

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6	UNIT MODEL	D155A-6	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	2 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
4	CAGE ASSEMBLY	- Measure clearence (a) and (b) between cage (47) and case (36) clearence a + b Act. : mm - Install the shim to the cage and tighten mounting bolt of cage (6 pcs) Act. : kgm	Using thickness gauge See table,determine quantity (c) of the shim from the total of clearence (a) and (b) Std torque 10 - 12 kgm				
	HUB AND CASE ASSEMBLY	- Install oil sump plate (45) to case (36) * When the installing the plate,press its surface against case faces (a) and (b) mounting bolt Act. : kgm	Std torque 6 - 7.5 kgm LT -2				 
		- Install Inner race bearing to case Act. : ton - Install collar to case	Using tool K5,Press fit Inner race bearing (44) to case (36) * Press fit force (2.1 - 5.5 ton)				
		- Install outer race bearing upper and lower to hub Act. : ton	Using tool K5,Press outer race bearing (42) to hub (41) * Press fit force (0.3 - 1.8 ton)				
		- Install hub assy to the shaft - Install gear to the hub mounting bolt Act. : kgm	Std torque 23.5 - 29.5 kgm LT -2				 

RANDOM ITEM CHECK
Name : Name :
QA INSPECTOR PROD. SUPERVISOR

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6	UNIT MODEL	D155A-6	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	3 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
6	GEAR AND HOLDER ASSEMBLY	- Install bearing to case Act. : ton	Using tool K7,Press bearing (37) to case (36) * Press fit force (2.1 - 5.5 ton)				
		- Install holder mounting bolt Act. : kgm	Std torque 23.5 - 29.5 kgm LT -2				
7	SUN GEAR AND CARRIER ASSEMBLY	- Install sun gear and thrust washer					
		- Install outer race bearing upper and lower to planetary gear Act. : ton	Using tool K6,Press outer race bearing (29) to case (30) * Press fit force (1.0 - 3.6 ton)				
		- Install inner bearing and spacer to planetary gear					
		- Install panetary gear assy to carrier and fit shaft * While aligning the hole of the bearing spacer, press fit the shaft gradually					
		- Install holder mounting bolt Act. : kgm	Std torque 23.5 - 29.5 kgm LT -2				

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6				
	UNIT MODEL	D155A-6	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	4 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
8	COVERASSEMBLY	- Install carrier assy to case					
9	COVER ASSEMBLY	- Install ring gear and lock plate mounting bolt Act. : kgm	Std torque 10 - 12.5 kgm LT -2				
		- Install spacer to cover - Install inner race bearing to cover Act. : ton	Using tool K6,Press inner race bearing (17) * Press fit force (1.5 - 4.4 ton)				
		- Fit floating seal to cover * Dry the oring and contact surface before installing the floating seal Act. : mm	Using tool K4,Press inner race bearing (17) * Check that its tilt is 1mm or less				
		- Fit the oring to cover assy and install them to the case assy * Mating face must be free from a dent,rust, oil,dirt and water * Apply the gasket sealant all around the mating face (1side) of the case * Thigten the all bolt within 20 minutes after applying the sealant mounting bolt Act. : kgm	Gasket sealant (LG-7) Std torque 46.5 - 58 kgm				
10	WEAR GUARD ASSEMBLY	- Install wear guard mounting bolt Act. : kgm	Std torque 84 - 105 kgm				

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6			
UNIT MODEL	D155A-6	DOCUMENT NO.	
COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
COMP. S/N		REVISION NO.	00
WO.NO		PAGE	5 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
11	SPROCKET HUB ASSEMBLY	- Install outer race bearing upper and lower to hub Act. : ton	Using tool K5,Press inner race bearing (17) * Press fit force (1.5 - 4.4 ton)				
		- Install sprocket to hub mounting bolt Act. : kgm	Std torque 110 - 130 kgm LT -2				
		- Fit floating seal to hub * Dry the oring and contact surface before installing the floating seal Act. : mm	Using tool K4,Press inner race bearing (17) * Check that its tilt is 1mm or less				
		- Install sprocket hub assy to cover assy * Check the sliding surface of the floating seal is free from dirt and apply engine oil thinly					
		- Install bearing * While rotating the sprocket hub assy,press fit the bearing Act. : ton	Using tool K10,Press bearing (7) * Press fit force (1.5 - 4.4 ton)				
		- Install plate mounting bolt Act. : kgm	Std torque 23.5 - 29.5 kgm LT -2				
12	SHAFT ASSEMBLY	- Fit the oring to hub sprocket assy - Install shaft					

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE D155A-6				
	UNIT MODEL	D155A-6	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	PUBLIC.DATE	13/07/2016
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	6 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN: MEC	SIGN: SPV	SIGN: QA	REMARKS (SKETCH, PHOTOES, COMMENTS)
13	SHAFT ASSEMBLY	mounting bolt Act. : kgm	Std torque 125 - 150 kgm				
14	TABLE OF SHIM	- Thickness of shim adjusment Act. : mm					

a + b (mm) Above	a + b (mm) Below	Number of shims to be used: t = 0 15	t = 0 5	t = 1 0	Total shim thick-ness (mm)
3 05	3 15	5		1	1.75
3.15	3 25	2	1	1	1.80
3 25	3 35	9	1		1.85
3 35	3 45	6		1	1.90
3.45	3.55	3	1	1	1.95
3.55	3 65			2	2.00
3.65	3 75	7		1	2 05
3 75	3.85	4	1	1	2.10
3 85	3 95	1		2	2.15
3.95	4.05	8		1	2.20
4.05	4.15	5	1	1	2.25
4.15	4 25	2		2	2 30
4.25	4 35	9		1	2.35
4.35	4.45	6	1	1	2.40
4.45	4.55	3		2	2.45
4.55	4 65		1	2	2 50
4.65	4 75	7	1	1	2.55
4 75	4.85	4		2	2.60
4.85	4 95	1	1	2	2.65
4.95	5 05	8	1	1	2 70
5 05	5.15	5		2	2.75
5 15	5.25	2	1	2	2.80
5 25	5.35	9	1	1	2.85
5 35	5.45	6		2	2.90
5 45	5 55	3	1	2	2 95
5.55	5.65			3	3.00
5 65	5.75	7		2	3.05
5.75	5 85	4	1	2	3.10
5 85	5 95	1		3	3.15
5 95	6.05	8		2	3.20
6 05	6.15	5	1	2	3.25
6 15	6.25	2		3	3.30
6 25	6.35	9		2	3 35
6 35	6.45	6	1	2	3.40
6.45	6 55	3		3	3.45
6 55	6 65		1	3	3.50
6.65	6.75	7	1	2	3 55
6.75	6 85	4		3	3.60
6.85	6 95	1	1	3	3.65
6.95	7.05	8	1	2	3.70
7 05	7.15	5		3	3.75
7 15	7.25	2	1	3	3.80
7 25	7.35	9	1	2	3.85

NOTE :

ASSEMBLY BY

INSPECTED BY

APPROVED BY

(MECHANIC)

(QA)

(GL / SPV)

PT SAPTAINDRA SEJATI

FINAL DRIVE LH

DELIVERY

CHECKSHEET

MACHINE MODEL

D155A-6

RO NO :

POWERTRAIN SECTION

PT.SAPTA INDRA SEJATI
PLANT REBUILD CENTER

DELIVERY CHECK SHEET	WO. NO		DOCUMENT NO	
FINAL DRIVE LH	COMP.S/N		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
D 155A - 6	PART NO. COMPONENT	17A - 27 - 00141	PAGE	

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES

Front Side View

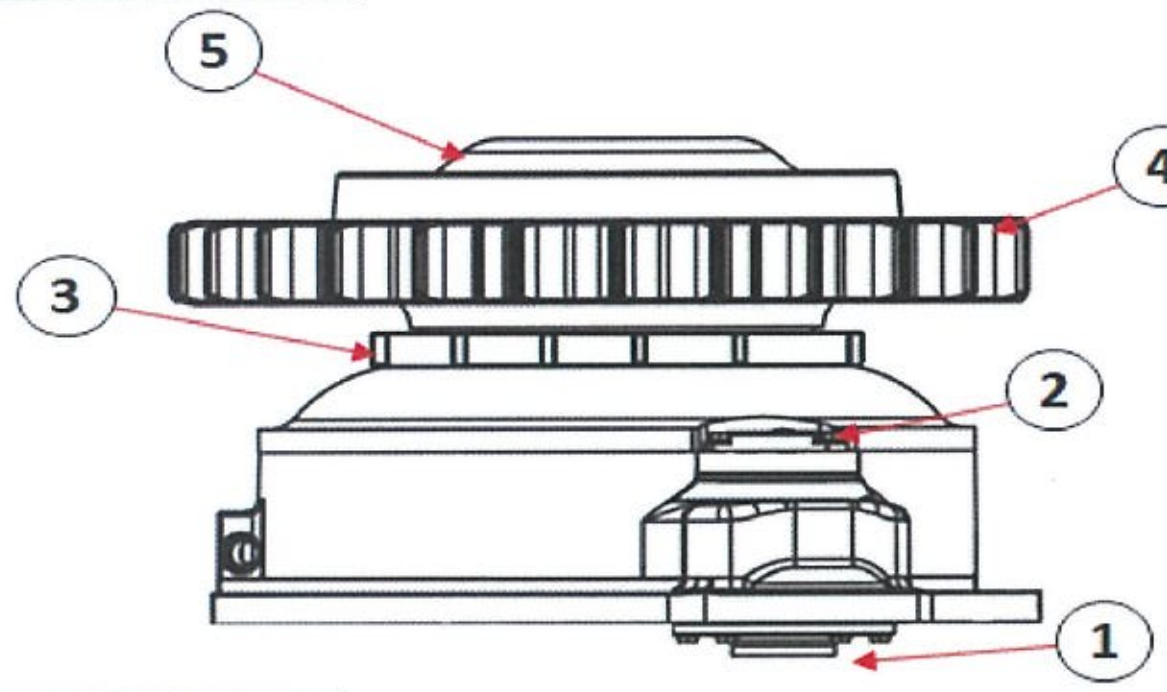

Right Side View

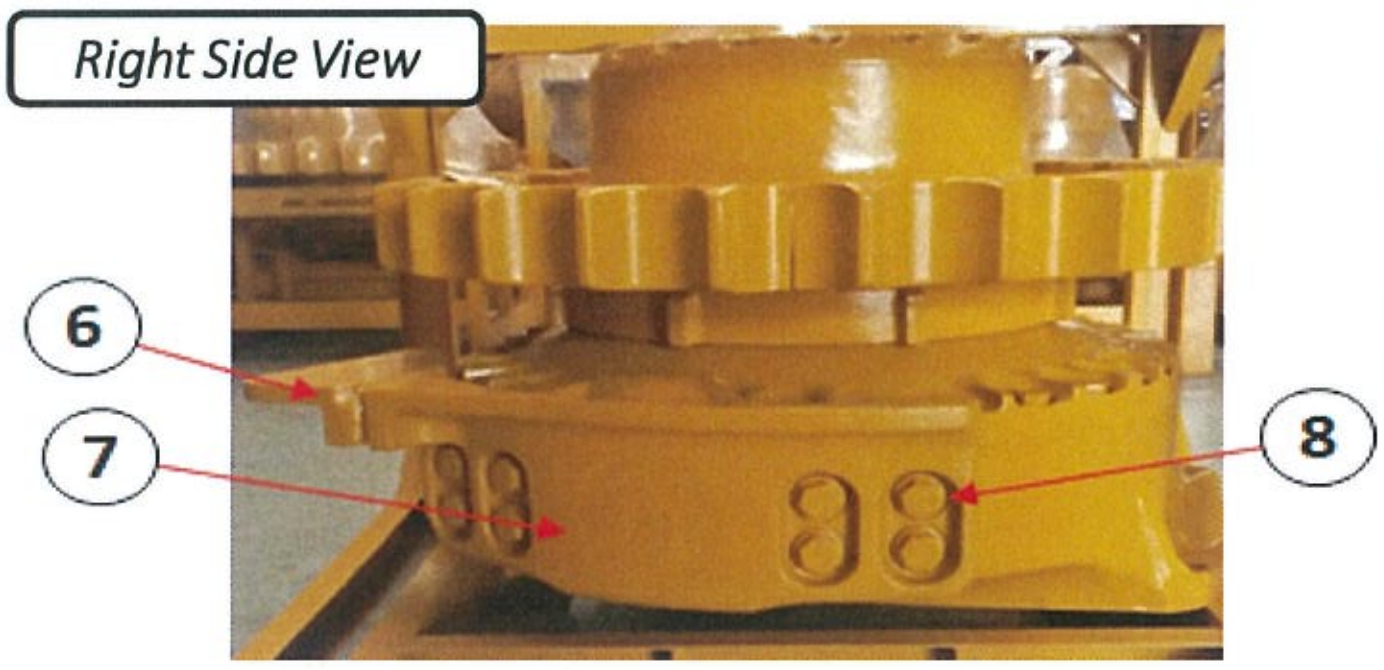

Top Side View

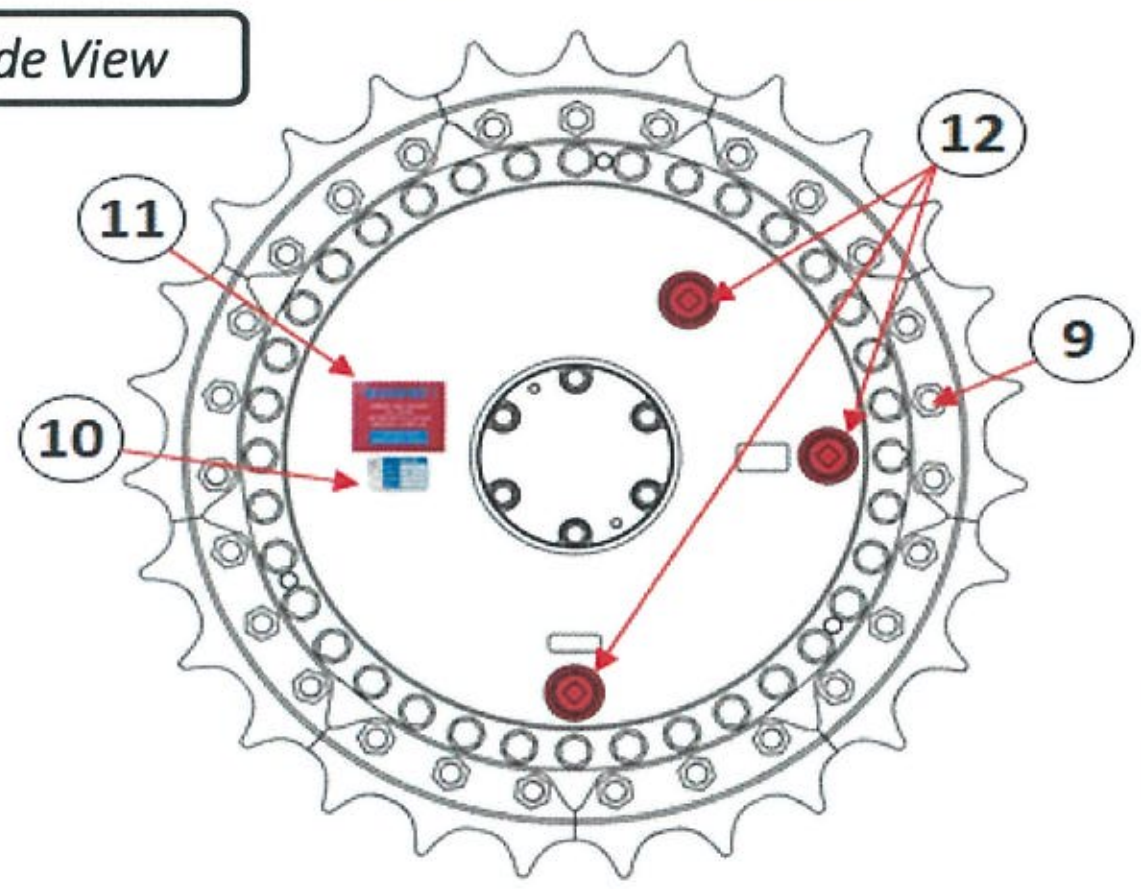

NO	ITEM	CHECK	REMARK
1	Hole protection		
2	Bolt cover		
3	Retainer		
4	Sprocket		
5	Cover		
6	Rock Destroiyer		
7	Guard		
8	Bolt Guard		
9	Bolt Sprocket		
10	Name plate		
11	Warning(Sticker)		
12	Plug		
	Warning (Sticker)		
	Painting condition		
	Packing / wraping		
	Stand		
	Bolt stand		
	Delivery check sheet		
	Quality passed (Sticker)		

NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

Note : ______________________________

____

____

INSPECTION BY **APPROVED BY**

______________________ ______________________

QA/GL **QA COORDINATOR**