


CYLINDER HEAD AFTER MACHINING AND MEASUREMENT CHECK SHEET

WO NUMBER		PART NAME	CYLINDER HEAD	DOCUMENT NO.	RC-QA-EG-R2-0021
ENGINE MODEL	SAA12V140E-3	PART NUMBER		PUBL. DATE	
ENGINE S/N		START DATE / TIME		REVISION NO.	02
MACHINE MODEL		FINISH DATE / TIME		PAGE	

MEASURED BY		QUANTITY	4
-------------	--	----------	---

STANDARD FIGURES

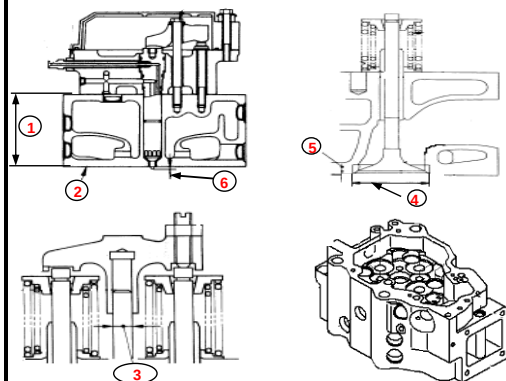

No	Measuring items			Std Tolerance (mm)	Repair Limit (mm)
1	Head Height			140.05 ~ 139.95	139. 65
2	Lower Surface Distortion			0,060	0,090
3	O.D. of Cross Head Guide			11.011 ~ 11.000	10,950
4	Valve Seat Insert Bore	In	Std	55.000 ~ 55.019	-
			0.25 OS	55.250 ~ 55.269	-
			0.50 OS	55.500 ~ 55.519	-
		Ex	Std	52.000 ~ 52.019	-
			0.25 OS	52.250 ~ 52.269	-
			0.50 OS	52.500 ~ 52.519	-
5	Valve Sink			0 ± 0.10	0.70
6	Nozzle Protrusion			2.3 ~ 2.9	Replace nozzle

A.Result of Measurement

No.	Measuring Item			R1		R2		R3		R4		R5		R6		RANDOM INSPECTION													
				MEC	QA/GL	MEC	QA/GL	MEC	QA/GL	MEC	QA/GL	MEC	QA/GL	MEC	QA/GL	GL/SPV SIGN													
1	Head Height																												
2	Distortion																												
3	O.D Cross Head Guide	In																											
		Ex																											
4	Valve Seat Insert Bore	In	1	MEASURED BY DIS-ASSEMBLY SECTION																									
			2																										
	Ex	1																											
		2																											
5	Valve Sink	In	1																										
			2																										
	Ex	1																											
		2																											
6	Nozzle protrution																												
7	ID Valve Guide (Use Tool G/NG)	In	1	NEW PARTS																									
			2																										
	Ex	1																											
		2																											

CYLINDER HEAD AFTER MACHINING AND MEASUREMENT CHECK SHEET

WO NUMBER		PART NAME	CYLINDER HEAD	DOCUMENT NO.	RC-QA-EG-R2-0021
ENGINE MODEL	SAA12V140E-3	PART NUMBER		PUBL. DATE	
ENGINE S/N		START DATE / TIME		REVISION NO.	02
MACHINE MODEL		FINISH DATE / TIME		PAGE	

Unit : mm

ENGINE MODEL	VALVE SPRING	STANDARD SIZE		REPAIR LIMIT
		FREE LENGTH	INSTAL LENGTH	LOAD (KG)
12V140 Series	INNER	72,00	46,00	19,70
	OUTER	81,70	51,00	38,70
6D140 Series	INNER	72,00	46,00	19,60
	OUTER	81,70	51,00	38,50
6D170-3	INNER	-	-	-
	OUTER	99,60	87,40	62,00
6D170 Series	INNER	59,30	47,00	17,40
	OUTER	64,80	37,50	84,80
6D170 HD465-5	INNER	73,80	48,00	23,30
	OUTER	77,00	52,00	48,70
6D125-2	INNER	-	-	-
	OUTER	75,20	56,00	47,70
6D155-4	INNER	-	-	-
	OUTER	88,00	51,90	65,50

3 of 4

[illegible]

CYLINDER HEAD AFTER MACHINING AND MEASUREMENT CHECK SHEET

WO NUMBER		PART NAME	CYLINDER HEAD	DOCUMENT NO.	RC-QA-EG-R2-0021
ENGINE MODEL	SAA12V140E-3	PART NUMBER		PUBL. DATE	
ENGINE S/N		START DATE / TIME		REVISION NO.	02
MACHINE MODEL		FINISH DATE / TIME		PAGE	

Measurement procedure of flatness Cylinder head surface

Method of measurement of depth, and measurement tool :
Visual inspection or use Dial gauge.

Judgement of Distortion(Flatness)

Judgement of Distortion(Flatness)
Measure clearance between Head and straight edge
Measuring point : Refer the right picture



Upper surface	Flatness	Remedy
	within 0.08mm	Use as it is
	More than 0.08mm	Reuse after surface grinding
lower surface	within 0.08mm	Reuse after surface grinding

Measurement of Distortion , and measurement tool
Straight edge, Clearance gauge

Measure flatness of the bottom surface of head.




Fig. A



Fig. B

INSPECTION RESULT :

[illegible]

INSPECTION BY :

INSPECTION & APPROVAL BY :

MECHANIC (MEC)

QUALITY ASSURANCE (QA)

GL/SPV PRODUCTION