

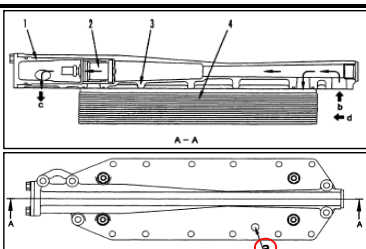



ASSEMBLY CHECK SHEET OIL COOLER FRONT KOMATSU ENGINE 6D170-5	WO NUMBER		DOCUMENT NO	RC/QR04/EG/06/02
	ENGINE MODEL		PUBLISHED DATE	07/08/2009
	ENGINE S/N		REVISION NO	00
	MACHINE MODEL		PAGE	1 of 1

PROCESS	START		ASSEMBLY BY	
	FINISH			

NO	PARTS	CHECK POINT	CONDITION TO BE CHECKED	SPEC.	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
					MEC	SPV	QA	
1	Core Element		- Test and check flow on core element. - Test and check leakage on core element	Oil cooler flusher				 
2	Thermostat		- Check cleanliness and damage crack on thermostat. - Test and check function of thermostat.					 Thermostat
3	Housing		- Check cleanliness and damage crack on element housing. - Check all threads on element housing - Check paper gasket threebond spec for sustainable genuine part. - Prepare liquid gasket threebond 1207C - Install o ring to plug and install to housing then tighten. Actual : Kgm	Red liquid gasket 5 Kgm				 Oil Cooler Housing
4	Assembly of Thermostat		- Install seal on housing thermostat. - Install thermostat on housing oil cooler - Install o ring on cover thermostat - Install cover thermostat on oil cooler housing . - Install bolt then tighten. Actual : Kgm	3.2 ±0.3Kgm				 1. Thermostat cover a. Water drain 2. Thermostat (thermo valve) b. Oil inlet 3. Cooler cover c. To all parts of engine (oil) 4. Cooler element d. Water inlet
5	Assembly of Oil Cooler Element		- Fit O ring or gasket on housing - Install washer and nut then tighten. - Tighten Torque : Actual : Kgm M10 = 2.8~3.8Kgm M12 = 5.6~6.6Kgm (Komatsu assembly manual)	Apply LG-6 (Komatsu assembly manual)				 Oil Cooler Element

Comment :

ASSEMBLY BY	INSPECTION & APPROVED BY
MECHANIC (MEC)	QUALITY ASSURANCE (QA)
	GL/SPV PRODUCTION

