


PISTON, PISTON RING, PISTON PIN

FCD PISTON TYPE

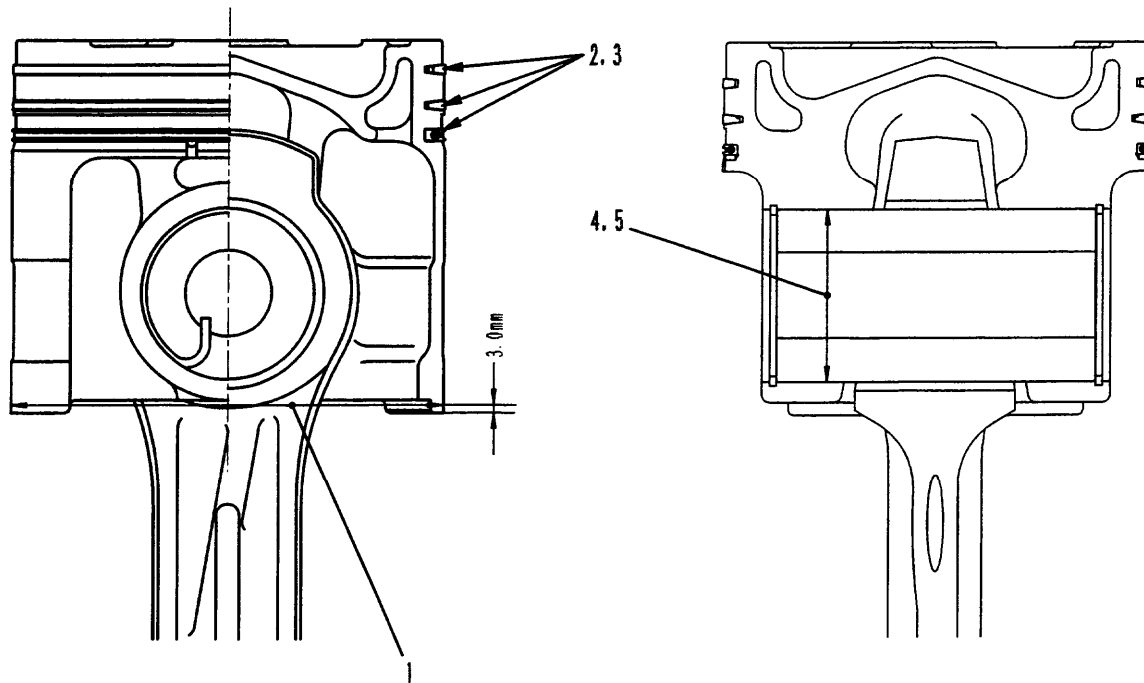

SXE01539

Unit: mm

No.	Check item	Criteria					Remedy
1	Outside diameter of piston (At 3.0 mm from bottom of piston at 20°C)	Standard size		Tolerance		Repair limit	Replace
		170 (at right angle from boss)		-0.135 -0.165		169.79	
2	Piston ring groove		Standard size	Tolerance		Clearance limit (clearance from new ring)	
				Link groove	Link thickness		
		Top ring	Keystone	Check with piston loop wear gauge or check clearance from new ring		0.15	
		2nd ring	Keystone				
	Oil ring	4.00	+0.05 +0.03	-0.01 -0.03	0.3		
3	Gap in piston ring at end gap			Standard clearance		Clearance limit	
		Top ring		0.50 – 0.65		1.8	
		2nd ring		0.70 – 0.85			
		Oil ring		0.50 – 0.70			
4	Inside diameter of piston pin hole	Standard clearance			Clearance limit		
		68			+0.044 +0.034		
5	Outside diameter of piston pin	68			0 -0.006		

Replace