



PT SAPTAINDRA SEJATI

**FINAL DRIVE
RECEIVING INSPECTION
CHECKSHEET**

MACHINE MODEL

D375A-6R

RO NO :

POWERTRAIN SECTION

RECEIVING&DELIVERY INSPECTION SHEET FINAL DRIVE LH	MACHINE MODEL	D375A-5	REPORT NO.		DOCUMENT NO.	QR01-PT-027
	COMP. MODEL		COMP. S/N		PUBL. DATE	01/08/2008
	RECEIVING DATE		INSP. DATE		REVISION NO.	00
	DELIVERY DATE		PROJECT NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

[illegible]

Jakarta,

Inspected by,

Aproved by,

YUNASRI

ABUNANSA



PT SAPTAINDRA SEJATI

FINAL DRIVE

DISASSEMBLY

CHECKSHEET

MACHINE MODEL






D375A-6R

RO NO :



POWERTRAIN SECTION

DISASSEMBLY CHECK SHEET	COMP.MODEL	PROJECT NO.	NUMBER.DOC	QR02 - PT - 056
FINAL DRIVE LH	COMP. S/N	PROD.NO	PUB.DATE	
D375A-5	UNIT MODEL	PROC.DATE	REV.NO	00
	UNIT S/N	PROC.BY	PAGE	1 of 2

PROCESS	START FINISH	DISASSEMBLY BY
---------	-----------------	----------------

No		PARTS NAME	METHODE	CHECK POINT	EVALUATION		FIGURE OF PARTS TO BE CHECKED																									
					ACTUAL	U/A	U/R	I/N																								
1	PINION GEAR	VISUAL CHECK	Pitting / Crack / Abnormal wear on seal contact area (<i>used crack detector</i>). <i>max wear : depth $\leq 0,1\text{ mm}$ width $\leq 0,5\text{ mm}$</i> Worn of spline area <i>max wear less than 0,35 mm</i> Measure thickness of shims <i>std thickness = 2 mm</i>	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table> <table><tr><th>Seal contact</th><th>Depth</th></tr><tr><td></td><td></td></tr><tr><th>Spline worn</th><th>Width</th></tr><tr><td></td><td></td></tr></table> <table><tr><th>Shims thickness</th><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		Seal contact	Depth			Spline worn	Width			Shims thickness		<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>									
CONTENTS CHECK	PERCENTAGE																															
Pitting																																
Crack																																
Scoring																																
Seal contact	Depth																															
Spline worn	Width																															
Shims thickness																																
2	HUB	VISUAL CHECK	Crack / Abnormal wear at spline area. (Inspection used Crack detector)	<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>																									
3	BULL GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>																			
CONTENTS CHECK	PERCENTAGE																															
Pitting																																
Crack																																
Scoring																																
4	BOSS	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside diameter of bearing seat	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>																					
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
5	DRUM	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside spline area of drum. <i>max wear less than 0,35 mm</i> Abnormal wear at floating seal seat area.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table> <table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>															
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
6	CARRIER	VISUAL CHECK	Crack / Abnormal wear at spline area, Abnormal wear at hole shaft <i>Max clearance = 0,05 mm</i> (Inspection used Crack detector)	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>																					
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
7	GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table> <table><tr><th>CONTENTS CHECK</th><th>1</th><th>2</th><th>3</th></tr><tr><td>Pitting</td><td></td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td><td></td></tr><tr><td>Scoring</td><td></td><td></td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		CONTENTS CHECK	1	2	3	Pitting				Crack				Scoring				<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>					
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
CONTENTS CHECK	1	2	3																													
Pitting																																
Crack																																
Scoring																																
8	SHAFT	VISUAL CHECK	Crack / Abnormal wear.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Wear</td><td></td></tr><tr><td>Crack</td><td></td></tr></table> <table><tr><th>CONTENTS CHECK</th><th>1</th><th>2</th><th>3</th></tr><tr><td>Wear</td><td></td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Wear		Crack		CONTENTS CHECK	1	2	3	Wear				Crack				<table><tr><td></td><td></td></tr></table> <table><tr><td></td><td></td></tr></table>									
CONTENTS CHECK	PERCENTAGE																															
Wear																																
Crack																																
CONTENTS CHECK	1	2	3																													
Wear																																
Crack																																
9	COVER	VISUAL CHECK	Crack, abnormal wear at bearing site. Damage at ring gear seat area. Thread condition	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Thread</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		Thread																					
CONTENTS CHECK	PERCENTAGE																															
Worn																																
Crack																																
Thread																																
10	RING GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring																					
CONTENTS CHECK	PERCENTAGE																															
Pitting																																
Crack																																
Scoring																																


DISASSEMBLY CHECK SHEET FINAL DRIVE LH D375A-5	COMP.MODEL		PROJECT NO.		NUMBER.DOC	QR02 - PT - 056
	COMP. S/N		PROD.NO		PUB.DATE	05/05/2001
	UNIT MODEL	D375A-5	PROC.DATE		REV.NO	00
	UNIT S/N		PROC.BY		PAGE	2 of 2

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION				FIGURE OF PARTS TO BE CHECKED									
				ACTUAL	U/A	U/R	R/N										
11	CASE	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect drain plug installation thread, and over wear at bottom case surface area.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Worn</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Worn		<table><tr><td></td><td></td><td></td></tr></table>				
CONTENTS CHECK	PERCENTAGE																
Pitting																	
Crack																	
Worn																	
12	SHAFT	VISUAL CHECK	Alignment of shaft, measure at the lathe machine (<i>Std size less than 0,05 mm</i>)	<table><tr><td>Alignment of shaft</td><td></td></tr></table>	Alignment of shaft		<table><tr><td></td><td></td><td></td></tr></table>										
Alignment of shaft																	
13	BOSS	VISUAL CHECK	Abnormal wear at bearing seat		<table><tr><td></td><td></td><td></td></tr></table>												
14	SUN GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		<table><tr><td></td><td></td><td></td></tr></table>				
CONTENTS CHECK	PERCENTAGE																
Pitting																	
Crack																	
Scoring																	
15	PLATE	VISUAL CHECK	Crack / Abnormal wear		<table><tr><td></td><td></td><td></td></tr></table>												
16	SHAFT	VISUAL CHECK	Abnormal wear at bearing seat		<table><tr><td></td><td></td><td></td></tr></table>												

ADDITIONAL SAMPLE OF FAILURE SIGN ABOUT GEAR, RUBBER BUSHING, AND BEARING.



PITTING : Pit-shaped peeling of tooth surface



SPALLING : Caused by the fatigue crack



SCORING : Caused by contact between tooth metals



Identations : Damage by solid foreign objects



Extrusion, Crack, Peeling caused Deterioration



Flaxing : Caused Rolling Fatigue, Over Load

NOTE

DISASSEMBLY BY,

APPROVED BY

(MECHANIC)

(SUPERVISOR)



PT SAPTAINDRA SEJATI

FINAL DRIVE

ASSEMBLY

CHECKSHEET

MACHINE MODEL

D375A-6R

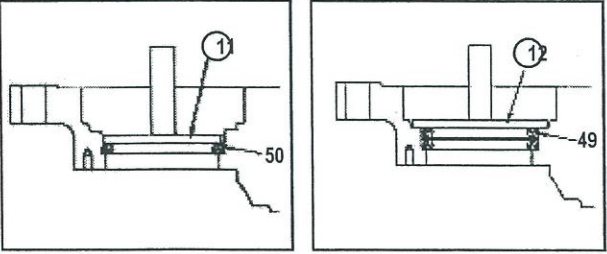
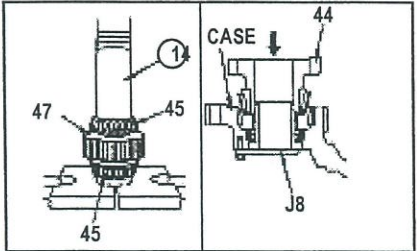
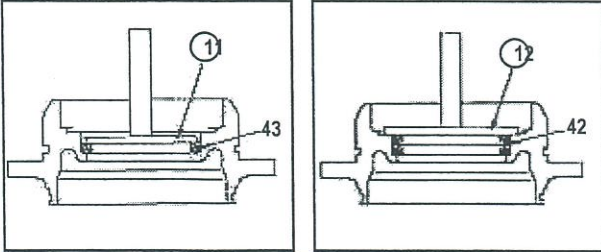
RO NO :

POWERTRAIN SECTION

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

QA - FORM	:
JOB SITE	:
UNIT CODE	:
WO NO	:
MEKANIK	:
DIKETAHUI	:

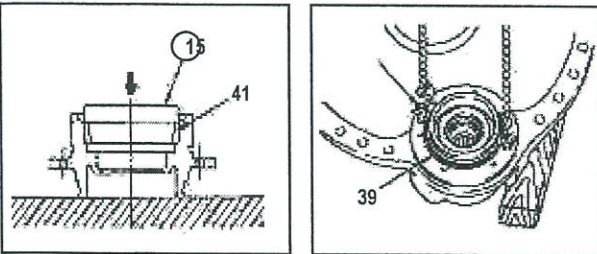
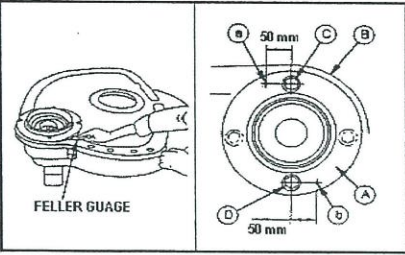
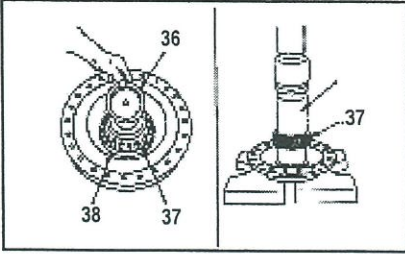
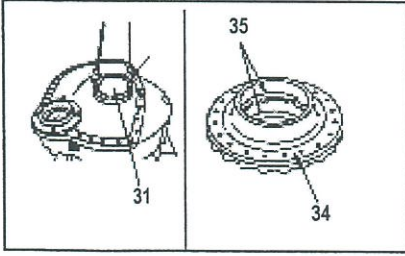
LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6	WAKTU PROSES		TOTAL WAKTU	WO NO							
	S / N :	TANGGAL	JAM		MEKANIK	Paraf :						
	COMP : FINAL DRIVE	START			DIKETAHUI	Paraf :						
	S / N :	FINISH										
GAMBAR KERJA		HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)			DIPERIKSA / CHECK ITEM							
		★ Pastikan semua component yang akan dipasang dalam keadaan bersih dari karat ,debu dan kering dari solar. ★ Perlu dilihat juga buku PK 2 ,SHOP MANUAL dan PSN , sebagai panduan pada saat akan melakukan pemasangan component. 1. Pasang oil Seal (50) dan (49) pada case, gunakan Push Tool ① dan ② • Pasang Oil Seal bagian atas dengan sisi yang menerima Pressure menghadap keatas dan pasang Oil Seal bagian bawah dgn sisi yang menerima Pressure menghadap kebawah (Lihat PSN AT01033-14maret2001)). ⇒ Pres fit outer race (48) ,gunakan push tool ③			RANDOM ITEM CHECK <table border="1" style="width: 100%;"> <tr> <td style="height: 60px;"></td> <td style="height: 60px;"></td> </tr> <tr> <td>Name :</td> <td>Name :</td> </tr> <tr> <td>QA INSPECTOR</td> <td>PROD. SUPERVISOR</td> </tr> </table>				Name :	Name :	QA INSPECTOR	PROD. SUPERVISOR
Name :	Name :											
QA INSPECTOR	PROD. SUPERVISOR											
		2. GEAR ASSEMBLY ⇒ Press Fit Bearing (45) dan (46) pada gear (47) ,gunakan push tool ④ ⇒ Pasang tool ④ pada case dan pasang gear assembly (44). • Jangan dilepas tool ④ sampai cage terpasang.										
		3. Pasang oil Seal (43) dan (42) pada cage, gunakan Push Tool ① dan ② • Pasang Oil Seal bagian atas dengan sisi yang menerima Pressure menghadap keatas dan pasang Oil Seal bagian bawah dgn sisi yang menerima Pressure menghadap kebawah .										

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

QA - FORM	:
JOB SITE	:
UNIT CODE	:
WO NO	:
MEKANIK	Paraf :
DIKETAHUI	Paraf :

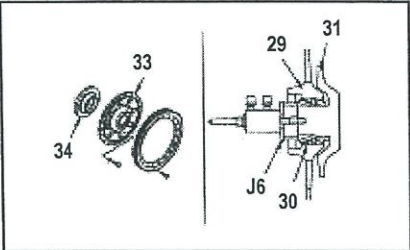
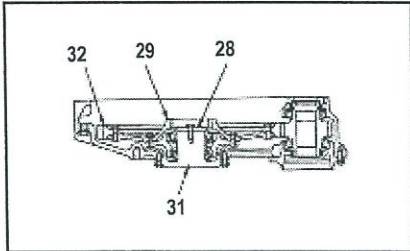
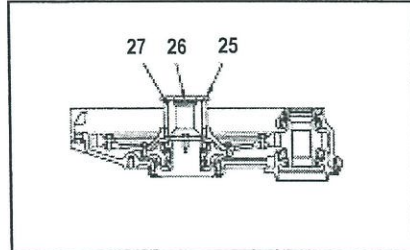


LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6	WAKTU PROSES			TOTAL WAKTU
	S / N :	TANGGAL	JAM		
	COMP : FINAL DRIVE	START			
	S / N :	FINISH			

GAMBAR KERJA		HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM																
		⇒ Press fit bearing outer race (41) ,gunakan push tool ① ⇒ Pasang Cage (39) ke Case dan kencangkan Bolt <table border="1"> <tr> <td>STANDRAD</td> <td>ACTUAL (Kgm)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1.5 kgm</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> • Putar Gear dan kencangkan yang rata dan lepas Tool ②	STANDRAD	ACTUAL (Kgm)				1.5 kgm											
STANDRAD	ACTUAL (Kgm)																		
1.5 kgm																			
		⇒ Ukur clearance a dan b antara cage A dan case B dengan feeler gauge ⇒ Pasang Shim (c) sesuai kebutuhan dan kencangkan Cage Mounting Bolt. • Lihat tabel shim pada shop manual hal.30 -174 . <table border="1"> <tr> <td>STANDRAD</td> <td>ACTUAL (Kgm)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>11.5 ± 1.25 kgm</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> • Setelah terpasang (shim) ,check putaran gear harus smoothly.	STANDRAD	ACTUAL (Kgm)				11.5 ± 1.25 kgm					<table border="1"> <tr> <th colspan="2">RANDOM ITEM CHECK</th> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Name : QA INSPECTOR</td> <td>Name : PROD. SUPERVISOR</td> </tr> </table>	RANDOM ITEM CHECK				Name : QA INSPECTOR	Name : PROD. SUPERVISOR
STANDRAD	ACTUAL (Kgm)																		
11.5 ± 1.25 kgm																			
RANDOM ITEM CHECK																			
Name : QA INSPECTOR	Name : PROD. SUPERVISOR																		
		4. HUB DAN SHAFT ASSEMBLY ⇒ Pasang collar (38) ,press fit bearing (37) dan pasang collar (36).																	
		⇒ Fit O-ring ,pasang shaft assembly (31) pada case ⇒ Press fit outer race (35) pada boss (34) dan pasang boss (103) pada hub (102).																	

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

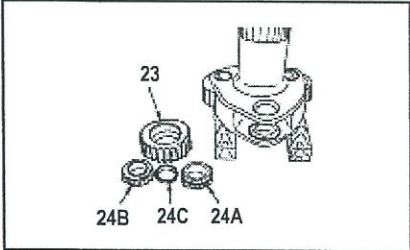
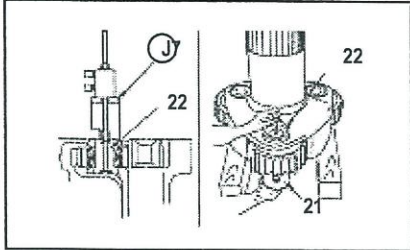
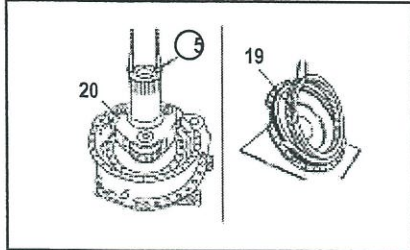
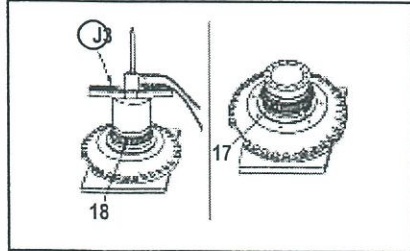
QA - FORM	:	
JOB SITE	:	
UNIT CODE	:	
WO NO	:	
MEKANIK	:	Paraf :
DIKETAHUI	:	Paraf :

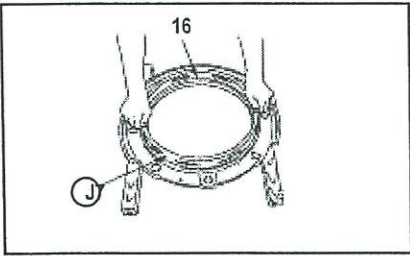
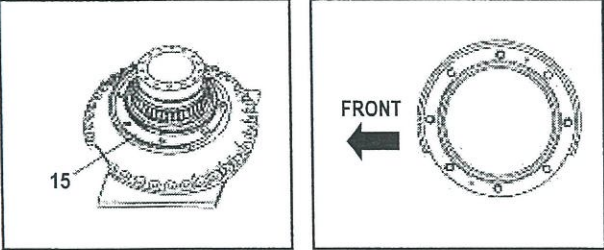
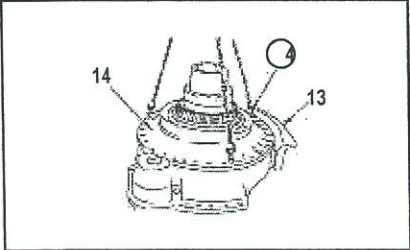
LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6 S / N : COMP : FINAL DRIVE S / N :	WAKTU PROSES TANGGAL JAM START FINISH	TOTAL WAKTU													
GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM														
 	⇒ Pasang boss (34 pada hub (33) ⇒ Pasang shaft assembly (31) dan hub assembly (29) , ⇒ Gunakan tool  , Press fit bearing (30) Kencangkan bolts hub assembly (29) <table border="1" data-bbox="824 564 1133 644"> <tr><th>STANDARD</th></tr> <tr><td>28.25 ± 3.25 Kgm</td></tr> </table> <table border="1" data-bbox="1200 564 1509 644"> <tr><th>ACTUAL</th></tr> <tr><td>Kgm</td></tr> </table> ⇒ Pasang plate (28) ,kencangkan bolt (gunakan thread tightener LT-2) <table border="1" data-bbox="824 716 1133 796"> <tr><th>STANDARD</th></tr> <tr><td>56 ± 6 Kgm</td></tr> </table> <table border="1" data-bbox="1200 716 1509 796"> <tr><th>ACTUAL</th></tr> <tr><td>Kgm</td></tr> </table> ⇒ Pasang gear (32) ,kencangkan bolt. <table border="1" data-bbox="824 852 1133 932"> <tr><th>STANDARD</th></tr> <tr><td>55 ± 5 Kgm</td></tr> </table> <table border="1" data-bbox="1200 852 1509 932"> <tr><th>ACTUAL</th></tr> <tr><td>Kgm</td></tr> </table>	STANDARD	28.25 ± 3.25 Kgm	ACTUAL	Kgm	STANDARD	56 ± 6 Kgm	ACTUAL	Kgm	STANDARD	55 ± 5 Kgm	ACTUAL	Kgm			
STANDARD																
28.25 ± 3.25 Kgm																
ACTUAL																
Kgm																
STANDARD																
56 ± 6 Kgm																
ACTUAL																
Kgm																
STANDARD																
55 ± 5 Kgm																
ACTUAL																
Kgm																
	5. PASANG SUN GEAR DAN SHAFT ASSEMBLY ⇒ Pasang sun gear (27) pada hub assembly ⇒ Pasang button (26) dan plate (25)															
 	6. PASANG CARRIER ASSEMBLY ⇒ Pasang ring dan spacer pada planetary gear,kemudian gunakan push tool  ,press fit bagian atas dan bawah bearing outer race (24D) Luruskan tanda distinguishing pada inner race ,outer race dan spacer pada saat assembly.															

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

QA - FORM	:
JOB SITE	:
UNIT CODE	:
WO NO	:
MEKANIK	Paraf :
DIKETAHUI	Paraf :

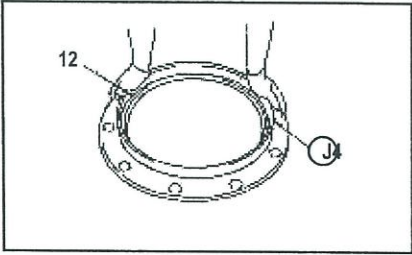


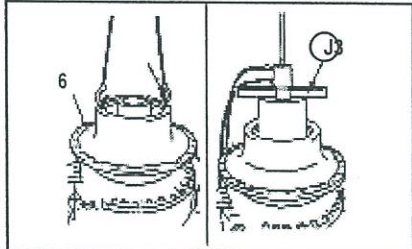
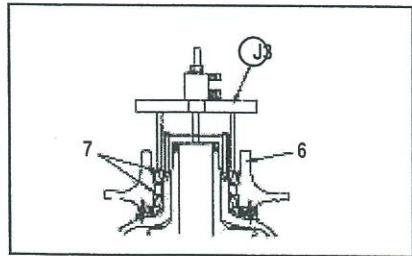
LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6	WAKTU PROSES			TOTAL WAKTU				
	S / N :	TANGGAL	JAM						
LEMBAR KERJA PEMASANGAN	COMP : FINAL DRIVE	START							
	S / N :	FINISH							
GAMBAR KERJA		HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)			DIPERIKSA / CHECK ITEM				
		⇒ Pasang spacer (24C) dan bearing inner race (24B) dab (24A) pada planetary gear (23)							
		⇒ Press Fit planetary gear shaft (22) ,gunakan Tool J • Luruskan shaft dengan posisi lubang pada bearing dan spacer ,kemudian press. ⇒ Pasang holder (21) .torque bolt. <table border="1" data-bbox="826 798 1135 880"> <tr> <th>STANDARD</th> </tr> <tr> <td>56 ± 6 Kgm</td> </tr> </table> <table border="1" data-bbox="1202 798 1512 880"> <tr> <th>ACTUAL</th> </tr> <tr> <td>Kgm</td> </tr> </table> • Setelah bolt ditorque ,check putaran gear harus smoothly.			STANDARD	56 ± 6 Kgm	ACTUAL	Kgm	
STANDARD									
56 ± 6 Kgm									
ACTUAL									
Kgm									
		⇒ Pasang carrier assembly (20) . 7. Cover assembly ⇒ Fit ring gear (19) dan pasang plate. • Pasang plate dengan chamfered disebelah atas.							
		⇒ Gunakan tool J,press fit bearing inner race (18) dan pasang spacer (17)							

Check Sheet Assembly		PT SAPTAINDRA SEJATI REBUILD CENTER			QA - FORM :							
					JOB SITE :							
					UNIT CODE :							
LEMBAR KERJA PEMASANGAN		MODEL : D375 A - 5/6		WAKTU PROSES		TOTAL						
		S / N :		TANGGAL	JAM	WAKTU						
		COMP : FINAL DRIVE		START								
		S / N :		FINISH								
						WO NO :						
						MEKANIK : Paraf :						
						DIKETAHUI : Paraf :						
GAMBAR KERJA		HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)				DIPERIKSA / CHECK ITEM						
		⇒ Gunakan tool  , press fit floating seal (16) pada floating seal cover • Pastikan O-ring bersih dan kering sebelum dipasang. • Sesudah floating seal terpasang check kemiringannya tidak lebih 1mm				RANDOM ITEM CHECK <table border="1" style="width: 100%;"> <tr> <td style="height: 60px;"></td> <td style="height: 60px;"></td> </tr> <tr> <td>Name : _____</td> <td>Name : _____</td> </tr> <tr> <td>QA INSPECTOR</td> <td>PROD. SUPERVISOR</td> </tr> </table>			Name : _____	Name : _____	QA INSPECTOR	PROD. SUPERVISOR
Name : _____	Name : _____											
QA INSPECTOR	PROD. SUPERVISOR											
		⇒ Pasang floating seal cover (15) . • Pasang agar pada bagian yang terpotong pada floating gasket sealant cover menghadap kebawah ,lihat gambar.										
		⇒ Pasang cover assembly (14) pada case ,kemudian torque bolts • Lumasi kedua permukaan cover dan case dengan gasket sealant. <table border="1" style="width: 100%; margin-top: 10px;"> <tr> <td style="width: 50%; text-align: center;">STANDARD</td> <td style="width: 50%; text-align: center;">ACTUAL</td> </tr> <tr> <td style="text-align: center;">56 ± 6 Kgm</td> <td style="text-align: center;">Kgm</td> </tr> </table> 8. Pasang wear guard (13) , torque bolt				STANDARD	ACTUAL	56 ± 6 Kgm	Kgm			
STANDARD	ACTUAL											
56 ± 6 Kgm	Kgm											

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

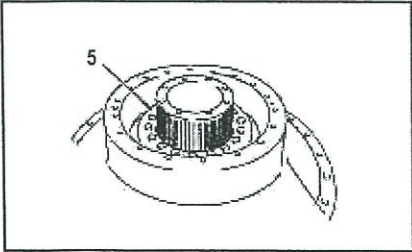
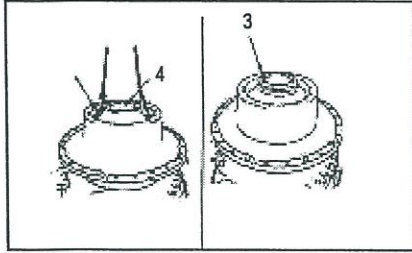
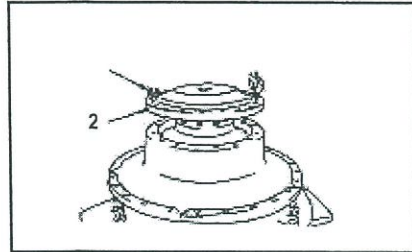
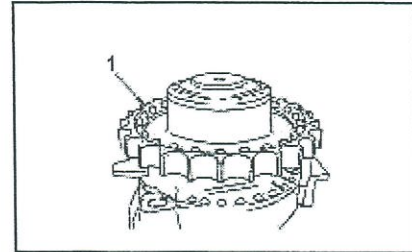
QA - FORM	:
JOB SITE	:
UNIT CODE	:
WO NO	:
MEKANIK	Paraf :
DIKETAHUI	Paraf :

LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6 S / N : COMP : FINAL DRIVE S / N :	WAKTU PROSES			TOTAL WAKTU		
		START	TANGGAL	JAM			
		FINISH					
GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)					DIPERIKSA / CHECK ITEM	
	9. SprocketT hub assembly. ⇒ Gunakan tool (J), pasang floating seal (12) pada floating seal cover • Pastikan O-ring bersih dan kering sebelum dipasang. • Sesudah floating seal terpasang check kemiringannya tidak lebih 1mm						
 	⇒ Press fit bearing outer races (11) dan (10). ⇒ Pasang floating seal cover (9) dan pasang bearing (8) pada sprocket hub assembly.						
 	⇒ Pasang sprocket hub assembly (6) pada cover • Pastikan permukaan yang bergesekan pada floating seal bersih ,kemudian oleskan dengan engine oil secukupnya. ⇒ Gunakan tool (J),press fit bearing (7). • Putar sprocket hub assembly setelah dilakukan press.						

Check Sheet
Assembly

PT SAPTAINDRA SEJATI
REBUILD CENTER

QA - FORM	:	
JOB SITE	:	
UNIT CODE	:	
WO NO	:	
MEKANIK	:	Paraf :
DIKETAHUI	:	Paraf :

LEMBAR KERJA PEMASANGAN	MODEL : D375 A - 5/6 S / N :	WAKTU PROSES		TOTAL WAKTU						
	COMP : FINAL DRIVE S / N :	START	TANGGAL		JAM	FINISH				
GAMBAR KERJA		HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)				DIPERIKSA / CHECK ITEM				
		⇒ Pasang Holder (5) dan kencangkan Bolt (gunakan thread tightener LT-2) <table border="1"> <tr> <th>STANDARD</th> <th>ACTUAL</th> </tr> <tr> <td>28.25 ± 3.25 Kgm</td> <td>Kgm</td> </tr> </table>				STANDARD	ACTUAL	28.25 ± 3.25 Kgm	Kgm	
STANDARD	ACTUAL									
28.25 ± 3.25 Kgm	Kgm									
		10. Pasang Hub (4) dan Plate (3), kemudian kencangkan Bolt <table border="1"> <tr> <th>STANDARD</th> <th>ACTUAL</th> </tr> <tr> <td>28.25 ± 3.25 Kgm</td> <td>Kgm</td> </tr> </table>				STANDARD	ACTUAL	28.25 ± 3.25 Kgm	Kgm	
STANDARD	ACTUAL									
28.25 ± 3.25 Kgm	Kgm									
		⇒ Pasang cover (2) dan kencangkan bolts <table border="1"> <tr> <th>STANDARD</th> <th>ACTUAL</th> </tr> <tr> <td>28.25 ± 3.25 Kgm</td> <td>Kgm</td> </tr> </table>				STANDARD	ACTUAL	28.25 ± 3.25 Kgm	Kgm	
STANDARD	ACTUAL									
28.25 ± 3.25 Kgm	Kgm									
		⇒ Pasang sprocket (1) dan kencangkan bolts (gunakan thread tightener LT-2) <table border="1"> <tr> <th>STANDARD</th> <th>ACTUAL</th> </tr> <tr> <td>185 ± 10 Kgm</td> <td>Kgm</td> </tr> </table>				STANDARD	ACTUAL	185 ± 10 Kgm	Kgm	
STANDARD	ACTUAL									
185 ± 10 Kgm	Kgm									



PT SAPTAINDRA SEJATI

**STEERING & BRAKE
ASSEMBLY
CHECKSHEET
MACHINE MODEL**

D375A-6R

RO NO :



POWERTRAIN SECTION



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET STEERING & BRAKE BULLDOZER (D375A SERIES)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	14/05/ 2010
	COMP. S/N		REV. NO	00
	MACHINE MODEL		PAGE	1 of 3

PROCESS	START		ASSEMBLY BY	
	FINISH			


NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED						
				MEC	SPV	QA							
1	CLUTCH BRAKE ASSEMBLY	- Put the beleville springs to back side when installing - Torque pins shorter than steering clutch torque pins	<table><tr><td>- Brake Clutch</td><td>Free Lenght</td><td>No. s Of Spring</td></tr><tr><td>Brake Spring</td><td>17.1 mm</td><td>3 Pcs</td></tr></table>	- Brake Clutch	Free Lenght	No. s Of Spring	Brake Spring	17.1 mm	3 Pcs				
		- Brake Clutch	Free Lenght	No. s Of Spring									
		Brake Spring	17.1 mm	3 Pcs									
- Avoid seal ring lip of seal ring (grease) from damage - Torque Bolt Cage Act : kgm	- Thread Tightener LT2 - Std Torque : 11 ~ 12.5 Kgm												
	- Coat thinly with engine oil and assy - Torque Bolt Stopper Act : kgm	- Thread Tightener LT2 - Std Torque : 28.25 ± 3.25Kgm											
2	CLUTCH ASSEMBLY	- Torque Bolt Ring Gear Act : kgm	- Thread Tightener LT2 - Std Torque : 18 ± 2 Kgm - Press fit or Heat 110°C ~ 120°C										
		Put the belleville spring back to back side when installing - Avoid seal ring lip of seal ring (grease) from damage	<table><tr><td>S/ Clutch</td><td>Free Lenght</td><td>No. s Of Spring</td></tr><tr><td>S/ Spring</td><td>17.6 mm</td><td>2 Pcs</td></tr></table>	S/ Clutch	Free Lenght	No. s Of Spring	S/ Spring	17.6 mm	2 Pcs				
S/ Clutch	Free Lenght	No. s Of Spring											
S/ Spring	17.6 mm	2 Pcs											



ASSEMBLY CHECK SHEET STEERING & BRAKE BULLDOZER (D375A SERIES)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	14/05/ 2010
	COMP. S/N		REV. NO	00
	MACHINE MODEL		PAGE	2 of 3

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
		- Avoid seal ring lip of seal ring (grease) from damage					
		- Torque Nut Act : kgm	- Thread Tightener LT2 - Std Torque : 25 ± 1.5 Kgm				
		- Torque Bolt lock Nut Act : kgm	- Thread Tightener LT2 - Std Torque : 2.5 ± 1.5 Kgm				
		- Torque Bolt Cage Act : kgm	- Thread Tightener LT2 - Std Torque : 11.25 ± 1.25 Kgm				
		- Torque Bolt Ring Gear Act : kgm	- Thread Tightener LT2 - Std Torque : 6.75 ± 0.75 Kgm				
		- Check that ring gear rotates smoothly - Torque Pins longer than Brake Clutch Torque Pins	- Coat Thinly with engine oil when assembly				
		- Torque Bolt stopper Steering Act : kgm	- Thread Tightener LT2 - Std Torque : 28.25 ± 3.25 Kgm				
		- Torque Bolt Plate Sleeve Act : kgm	- Press fit or Heat 110°C ~ 120°C - Thread Tightener LT2 - Std Torque : 11.25 ± 1.25 Kgm				

RANDOM ITEM CHECK	
Name : _____	Name : _____
QA INSPECTOR	PROD. SUPERVISOR



Notes :

ASSEMBLY BY	INSPECTED & APPROVED BY	
_____ (MECHANIC)	_____ (QA)	_____ (SUPERVISOR)

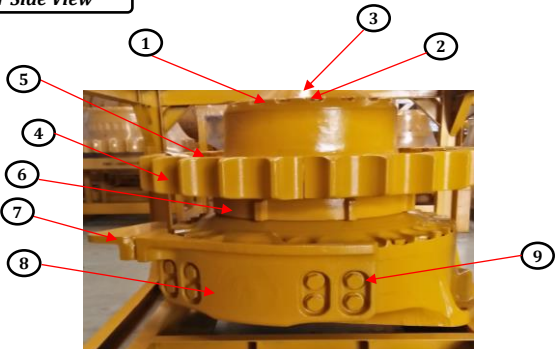
DELIVERY INSPECTION CHECKSHEET FINAL DRIVE	MACHINE MODEL	D375A-6	INSP. DATE		DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	DELIVERY DATE		PUBL. DATE	
	COMP. S/N		WO NO		REVISION NO.	01
	PART ASSY NO.		JOBSITE		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO.	ITEM	CHECK	REMARKS
Rear Side View 	1	Cover		
	2	Bolt Cover		
	3	Oil Level Plug		
	4	Sprocket		
	5	Bolt Sprocket		
	6	Retainer		
	7	Rock Destroyer		
	8	Guard		
	9	Bolt Muonting Guard		
	10	Cover Input Shaft		
	11	Bolt Cover		
	12	Painting		
	13	Name Plate		
	14	Stiker Oil Checking		
	15	Stand		
Front Side View 				
NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION				
OIL LEVEL	EMPTY OR DRAINED			
	PROPER LEVEL			

Inspected by,

Approved by,

QA Inspector

QA Coordinator