



PT SAPTAINDRA SEJATI

**POWERMODULE
RECEIVING INSPECTION
CHECKSHEET**

MACHINE MODEL

D375A-6

RO NO :

POWERTRAIN SECTION

RECEIVING & DELIVERY INSPECTION SHEET POWER MODUL	MACHINE MODEL	D375A-5	REPORT NO.		DOCUMENT NO.	QR01-PT-003
	COMP. MODEL		COMP. S/N		PUBL. DATE	01/08/2008
	RECEIVING DATE		INSP. DATE		REVISION NO.	01
	DELIVERY DATE		PROJECT NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO.	ITEM	INSPECTION CONDITION	CHECK						
				IN	OUT					
LEFT SIDE RIGHT SIDE FRONT SIDE REAR SIDE	1	Torque Converter								
		Model								
		Serial Number								
		Production Number								
	2	Scavenging pump								
	3	Power Train Pump mounting								
	4	Steering Lub pump								
	5	Work Equipment pump								
	6	PTO								
	7	Coupling								
	8	T/C Valve								
	9	Transmission								
		Model								
		Serial Number								
		Production Number								
	10	Transmission Case								
	11	T/M ECMV Valve								
	12	Bevel Gear & Transver Case								
	13	Steering & Brake RH + LH								
	14	Steering & Brake ECMV								
	15	Power train lubrication oil filter								
	16	Power train oil filter								
	17	RPM/ Speed Sensor								
	18	Power Train Strainer								
	19	Drain Plug								
	20	Centralized Press. detection port								
	21	Sudden Brake prevantion Valve								
	22	Parking Brake Lever								
	23	Level gauge oil								
24	Oil feeler port									
25	Brither									
26	Front Suport									
27	Painting									
28	Steel Skid (stand)									
29	Packing									
NOTE PLEASE MARK "✓" FOLLOWING TO THE ACTUAL CONDITION <table border="1"> <tr> <td rowspan="2">OIL LEVEL</td> <td>EMPTY OR DRAINED</td> <td></td> </tr> <tr> <td>PROPER LEVEL</td> <td></td> </tr> </table>						OIL LEVEL	EMPTY OR DRAINED		PROPER LEVEL	
OIL LEVEL	EMPTY OR DRAINED									
	PROPER LEVEL									

Jakarta, 2008

Inspected by,

Aproved by,



PT SAPTAINDRA SEJATI

TORQUE CONVERTER

DISASSEMBLY

CHECKSHEET

MACHINE MODEL

D375A-6

RO NO :





POWERTRAIN SECTION

DISASSEMBLY CHECK SHEET T/C ASSY D375A-5	COMP.MODEL		PROJECTNO.		NUMBER.DOC	RC/QR02/PT/01/03
	COMP. S/N		PROD.NO		PUB.DATE	01/08/2008
	UNIT MODEL		PROC.DATE		REV.NO	00
	UNIT S/N		PROC.BY		PAGE	1 of 2

PROCESS	START	DISASSEMBLY BY
	FINISH	

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION	DECISION	FIGURE OF PARTS TO BE CHECKED
				ACTUAL	U/A U/R R/N	
1	COUPLING	VISUAL MEASUREMENT	Wear at oil seal contact surface DEPTH : STD ≤ 0.1 mm WIDTH : STD ≤ 0.5 mm Spline wear standard ≤ 0.35 mm Mating face (u-joint) contact Depth ≤ 0.2 mm	SPLINE WEAR MATING FACE SEAL CONTACT DEPTH WIDTH		
2	SHAFT	VISUAL MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition) Seal Ring Groove side surface wear Refer to std Std wear less than 0,2 mm Roughness maximum 3,2 Spline teeth condition from Wear, Crack, Breakage Spline wear standard ≤ 0.35 mm	RING GROOVE WEAR WEAR ROUGHNESS SPLINE WEAR	DECISION IN STT	
3	HOUSING	VISUAL CHECK	Check all of position at case ass'y from Crack, Damage at Thread hole , worn at surface contact of bearing seat Mating Face condition from Scratch, Crack and Damage.	CONDITION % Tge Crack Damage Wear		
4	HOUSING CLUTCH	VISUAL CHECK MEASUREMENT	Wear and damage of seal ring contact surface Wear and damage of inside and outside surface of piston insertion portion wear std less than 0,2 mm Wear and damage of ring gear sliding surface wear std less than 0,3 mm	CONDITION PISTON HOUSING Seal Contact Crack Damage Wear Ring gear Contact Wear Damage Piston seat Crack Damage Wear	LOCK UP CLUTCH PIST HSG STATOR CLUTCH PIST HSG	
5	RING GEAR	MEASUREMENT VISUAL CHECK	Internal gear teeth surface (Pitting , Crack, Damage Breakage, Abnormal Wear) Max wear less than 0,5 mm External tooth flank in contact with disc (Stepper wear, Crack, Chipping) Housing sliding surface. std max wear less than 0,3 mm	CONDITION INNER OUTER Seal Contact Crack Damage Wear	RING GEAR L/UP STT	
6	PUMP	VISUAL CHECK	Inside and outside condition check from Crack, Deformation, and Breakage	CONDITION INNER OUTER PUMP Crack Damage Wear		
	RETAINER	MEASUREMENT	Wear size at bearing seat contact std size at WA 600-1 = 5,95 mm max wear = 0,20 mm	CONDITION DEPTH RETAINER Crack Damage Wear		

DISASSEMBLY CHECK SHEET T/C ASSY D375A-5	COMP.MODEL		PROJECTNO.		NUMBER.DOC	RC/QR02/PT/01/03
	COMP. S/N		PROD.NO		PUB.DATE	01/08/2008
	UNIT MODEL		PROC.DATE		REV.NO	00
	UNIT S/N		PROC.BY		PAGE	2 of 2

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION			DECISION			FIGURE OF PARTS TO BE CHECKED			
				ACTUAL			U/A	U/R	R/N				
7	TURBIN STATOR	VISUAL CHECK	Inside and outside condition check from Crack, Deformation, and Breakage Spline wear standard $\leq 0,35$ mm Bearing seat at Turbin	CONDITION	INNER	OUTER	TRB				TRB = Turbin 		
				TURBIN	Crack								
					Damage								
					Wear								
					Spline								
				STATOR	Crack								
					Damage								
					Wear								
					Spline								
8	CASE	VISUAL CHECK MEASUREMENT	Mating Face condition from Scratch, Crack, Damage of thread portion Disc sliding surface from wear, scratch, Heat spot or metal transfer, deformation Std max Scratch Depth Less Than 0,2 mm Teeth Gear Condition from crack,pitting, Damage	CONDITION	INNER	OUTER							
				Mating Face	Crack								
					Damage								
					Wear								
					Heat Spot								
				Disc Sliding	Crack								
					Damage								
					Wear								
					Heat Spot								
9	PTO COVER GEAR PTO	VISUAL CHECK	Mating Face of pto cover check from Crack, Scratch, and Damage of thread portion External Gear Teeth check from Pitting, Crack, Abnormal Wear, Breakage Spline Teeth check From Crack, Wear, Breakage Wear max Depth $\leq 0,35$ mm Thread portion from Damage.	CONDITION	INNER	OUTER	CVR						
				COVER	Crack		GR						
					Damage								
					Wear								
					Thread								
				GEAR PTO	Crack								
					Damage								
					Wear								
					Spline								
10	SLEEVE	VISUAL CHECK	Seal Ring Contact Surface ,Checking from Wear, Scratch, and Damage. Wear max Depth $\leq 0,35$ mm	CONDITION	INNER	OUTER	SLV						
				SLEEVE	Crack		SHF						
					Damage								
					Wear								
					Scratch								
11	STATOR SHAFT	VISUAL CHECK	Seal Ring Contact Surface check from Wear, Scratch, One Way Clutch Contact Surface Check from Wear, Scratch, Pitting, Scoring, Flaking, Dents Thread portion from Damage	CONDITION	INNER	OUTER							
				SHAFT	Crack								
					Damage								
					Wear								
					Thread								
13	NUT	VISUAL CHECK	Mating Face Contact With Bushing, check from Crack, Burn, Discoloration, Thread condition , Check from Damage condition Groove Key installation from Damage	CONDITION	INNER	OUTER	NUT						
				NUT	Crack		RC						
					Burn		BSH						
					Damage								
14	RACE	VISUAL CHECK	One Way clutch contact Surface , Check from Wear Scratch, Pitting, Scoring, Flaking, Dents Mating Face , check from Scratch, Crack, Damage of thread portion	CONDITION	INNER	OUTER							
				RACE	Crack								
					Damage								
15	BUSHING	VISUAL CHECK	Mating Face Contact With Nut and ball lock, check from Crack, Burn, Discoloration	CONDITION	INNER	OUTER							
				BUSH	Crack								
					Damage								
					Burn								
16	DISC	VISUAL CHECK MEASUREMENT	Friction Surface, Internal Gear teeth condition from Wear, Dished, Chipping, Discoloration Wear max $\leq 0,3$ mm, Dished max $\leq 0,2$ mm	NAME OF PARTS	STATOR				LOCK UP				
					1	2	3	4	1	2	3	4	
				DISC	Thickness								
					Dish								
					Pitting								
					Damage								
17	PLATE	VISUAL CHECK MEASUREMENT	Friction Surface, External Gear teeth condition from Wear, Dished, Chipping, Discoloration Wear max $\leq 0,3$ mm, Dished max $\leq 0,2$ mm	NAME OF PARTS	STATOR				LOCK UP				
					1	2	3	4	1	2	3	4	
				PLATE	Thickness								
					Dish								
					Pitting								
					Damage								

Note

DISASSEMBLY BY,

(MECHANIC)

APPROVED BY,

(SUPERVISOR)



PT SAPTAINDRA SEJATI

POWERMODULE

DISASSEMBLY & MEASUREMENT

CHECKSHEET

MACHINE MODEL

D375A-6

RO NO :





POWERTRAIN SECTION








PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

DISASSEMBLY AND MEASUREMENT CHECK SHEET POWER MODUL D375A-5	MACHINE MODEL	RECEIVING DATE	NUMBER.DOC	
	COMP.MODEL	FINAL INSPEC	PUB.DATE	04/03/2013
	COMP. S/N	DELIVERY DATE	REV.NO	01
	WO.NO	SITE	PAGE	1 of 6

PROCESS	START FINISH	DISASSEMBLY BY
---------	-----------------	----------------

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION	DECISION			FIGURE OF PARTS TO BE CHECKED																									
				ACTUAL	U/A	U/R	R/N																										
1	SUPPORT AND PTO GEAR	MEASUREMENT	Dimension at contact area with bracket (Trunion) Compare with standard size <table><tr><th>UNIT MODEL</th><th>STD SIZE</th></tr><tr><td>HD465-7</td><td>229,975 ~ 229,98 mm</td></tr><tr><td>HD 785-3 / 5</td><td>229,975 ~ 229,98 mm</td></tr><tr><td>D375A-3 / 5</td><td>234,995 ~ 235,00 mm</td></tr></table> Gear spline and teeth wear, Deformation, Crack, Wear std less than 0,2 mm	UNIT MODEL	STD SIZE	HD465-7	229,975 ~ 229,98 mm	HD 785-3 / 5	229,975 ~ 229,98 mm	D375A-3 / 5	234,995 ~ 235,00 mm	<table><tr><th>DIAMETER</th><th>DIMENSION ACT</th></tr><tr><td></td><td></td></tr></table> <table><tr><th>GEAR</th><th>ACT</th></tr><tr><td>1</td><td></td></tr><tr><td>2</td><td></td></tr><tr><td>3</td><td></td></tr><tr><td>4</td><td></td></tr></table>	DIAMETER	DIMENSION ACT			GEAR	ACT	1		2		3		4								
UNIT MODEL	STD SIZE																																
HD465-7	229,975 ~ 229,98 mm																																
HD 785-3 / 5	229,975 ~ 229,98 mm																																
D375A-3 / 5	234,995 ~ 235,00 mm																																
DIAMETER	DIMENSION ACT																																
GEAR	ACT																																
1																																	
2																																	
3																																	
4																																	
2	COUPLING (FLANGE)	MEASUREMENT VISUAL CHECK	Worn at spline and seal contact area Worn at surface of contact u-joint Compare with standard size Seal contact size : <table><tr><td>DEPTH : STD</td><td>≤ 0.1 mm</td></tr><tr><td>WIDTH : STD</td><td>≤ 0.5 mm</td></tr></table> Spline wear standard ≤ 0,35 mm Mating face (u-joint) contact Depth ≤ 0,2 mm	DEPTH : STD	≤ 0.1 mm	WIDTH : STD	≤ 0.5 mm	<table><tr><th>SPLINE WEAR</th></tr><tr><td></td></tr></table> <table><tr><th>MATING FACE</th></tr><tr><td></td></tr></table>	SPLINE WEAR		MATING FACE																						
DEPTH : STD	≤ 0.1 mm																																
WIDTH : STD	≤ 0.5 mm																																
SPLINE WEAR																																	
MATING FACE																																	
3	SHAFT INPUT	MEASUREMENT VISUAL CHECK	Spline teeth wear, Deformation, Crack, Breakage Wear dimension ≤ 0,35 mm. Seal Ring groove wear ≤ 0,2 mm Thread Portion condition Bearing contact area Bearing Seat surface	<table><tr><th>WEAR (%)</th></tr><tr><td></td></tr></table> <table><tr><th>WEAR (%)</th></tr><tr><td></td></tr></table>	WEAR (%)		WEAR (%)																										
WEAR (%)																																	
WEAR (%)																																	
4	CASE ASS'Y	VISUAL CHECK	Check all of position at case ass'y from Crack, Damage at Thread hole , worn at surface contact of bearing seat Mating Face condition from Scratch, Crack and Damage.	<table><tr><th>CONDITION</th><th>% Targe</th></tr><tr><td>Crack</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td>Wear</td><td></td></tr></table>	CONDITION	% Targe	Crack		Damage		Wear																						
CONDITION	% Targe																																
Crack																																	
Damage																																	
Wear																																	
5	HOUSING CLUTCH	VISUAL CHECK MEASUREMENT	Wear and damage of seal ring contact surface Wear and damage of inside and outside surface of piston insertion portion Wear and damage of ring gear sliding surface wear std less than 0,3 mm	<table><tr><th>CONDITION</th><th>CLUTCH</th></tr><tr><td>Crack</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td>Wear</td><td></td></tr><tr><td>Wear</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td></td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td>Wear</td><td></td></tr></table>	CONDITION	CLUTCH	Crack		Damage		Wear		Wear		Damage				Crack		Damage		Wear		<table><tr><th>R</th></tr><tr><td>F</td></tr><tr><td>4</td></tr><tr><td>3</td></tr><tr><td>1</td></tr></table>	R	F	4	3	1			
CONDITION	CLUTCH																																
Crack																																	
Damage																																	
Wear																																	
Wear																																	
Damage																																	
Crack																																	
Damage																																	
Wear																																	
R																																	
F																																	
4																																	
3																																	
1																																	
6	PISTON	VISUAL CHECK MEASUREMENT	Wear and damage of seal ring contact surface Wear and damage of inside and outside surface of piston Wear and damage of Disc contact surface Wear std less than 0,2 mm	<table><tr><th>CONDITION</th><th>CLUTCH</th></tr><tr><td>Crack</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td>Wear</td><td></td></tr><tr><td>Wear</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td></td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Damage</td><td></td></tr><tr><td>Wear</td><td></td></tr></table>	CONDITION	CLUTCH	Crack		Damage		Wear		Wear		Damage				Crack		Damage		Wear		<table><tr><th>R</th></tr><tr><td>F</td></tr><tr><td>4</td></tr><tr><td>3</td></tr><tr><td>1</td></tr></table>	R	F	4	3	1			
CONDITION	CLUTCH																																
Crack																																	
Damage																																	
Wear																																	
Wear																																	
Damage																																	
Crack																																	
Damage																																	
Wear																																	
R																																	
F																																	
4																																	
3																																	
1																																	

DISASSEMBLY AND MEASUREMENT CHECK SHEET POWER MODUL D375A-5	MACHINE MODEL	RECEIVING DATE	NUMBER.DOC	
	COMP.MODEL	FINAL INSPEC	PUB.DATE	05/05/2010
	COM S/N	DELIVERY DATE	REV.NO	00
	WO.NO	SITE	PAGE	2 of 6

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION			DECISION			FIGURE OF PARTS TO BE CHECKED	
				ACTUAL			U/A	U/R	R/N		
7	RING GEAR	MEASUREMEN VISUAL CHEC	Internal gear teeth surface (Pitting , Crack, Damage Breakage, Abnormal Wear) Max wear less than 0,5 mm External tooth flank in contact with disc (Stepper wear, Crack, Chipping) Housing sliding surface. std max wear less than 0,3 mm	Clutch H L R F 4 3 2 1	POSITION	CONDITION	H L R F 4 3 2 1				
8	CARRIER	MEASUREMEN VISUAL CHEC	Shaft Boss (Crack, Distortion,) Seat Bearing Diameter, Spacer Bearing Gear teeth Pitting, Crack, Breakage, Abnormal wear. Planetary Shaft Hole (Fatigue , Wear) Max Wear less than 0,1 mm Wear at surface contact with trust washer Max wear less than 0,2 mm	Clutch H L R F 4 3 2 1	POSITION	CONDITION arr Spacer	H L R F 4 3 2 1				
	SPACER	MEASUREMEN	Thickness wear, Inner Diameter, Outer Diameter								
9	SUN GEAR	VISUAL CHEC	Gear Surface, Pitting, Crack, Breakage, Abnormal wear INSPECTION AREA	CONDITION CLUTCH HIGHT LOW REVERSE FORWARD 1 2 3 4	PITTING	CRACK	SCORING	H L R F 4 3 2 1			
10	PLANETARY GEAR	VISUAL CHEC	Gear Surface, Pitting, Crack, Breakage, Abnormal wear at inside diameter of gear	CONDITION CLUTCH HIGHT LOW REVERSE FORWARD 1 2 3 4	PITTING (PCS)	WEAR (PCS)	SCORING (PCS)	H L R F 4 3 2 1			
				Note : Fill in the blank with Qty of gear damage							
11	SHAFT GEAR	VISUAL CHEC MEASUREMEN	Wear at surface contact with bearing Wear at surface contact with thrust washer Crack (Damage) at hole of oil galary.	CONDITION CLUTCH HIGHT LOW REVERSE FORWARD 1 2 3 4	CRACK (PCS)	WEAR (PCS)	PITTING (PCS)	H L R F 4 3 2 1			
				Note : Fill in the blank with Qty of Shaft damage							
12	HOUSING (END PLATE)	VISUAL CHEC MEASUREMEN	Disc contact surface heat spot metal transfer Wear at disc contact surface std max less than 0,2 mm Wear at ring gear contact surface std max less than 0,2 mm	CONDITION Heat Spot Damage Wear	% Tase						

MEASUREMENT CHECK SHEET POWER MODUL D375A-5	MACHINE MODEL	RECEIVING DATE	NUMBER.DOC	
	COMP.MODEL	FINAL INSPEC	PUB.DATE	05/05/2010
	COMP S/N	DELIVERY DATE	REV.NO	00
	WO.NO	SITE	PAGE	3 of 6

No	PARTS NAME	MEASUREMENT DATA	FIGURE OF PARTS TO BE CHECKED																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
13	SPRING CLUTCH	VISUAL CHECK MEASUREMENT DIMENSION OF STANDARD FREE LENGTH (mm) <table><tr><th>MODEL CLUTCH</th><th>HD 465-5</th><th>HD785-3</th><th>GD825A-2</th><th>WA500</th><th>WA600</th><th>WA800</th><th>D85ESS-2</th><th>D155AX-3</th><th>D275A-2/3</th><th>D375A-5</th></tr><tr><td>HIGH</td><td>42.00</td><td>52.00</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>LOW</td><td></td><td></td><td>66.00</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>REVERSE</td><td>91.00</td><td>84.00</td><td>53.00</td><td>68.00</td><td>68.00</td><td>91.00</td><td>59.00</td><td>56.80</td><td>59.00</td><td>66.00</td></tr><tr><td>FORWARD</td><td></td><td></td><td>53.00</td><td>68.00</td><td>68.00</td><td>108.00</td><td>69.50</td><td>56.80</td><td>70.00</td><td>70.00</td></tr><tr><td>1</td><td>68.00</td><td>68.00</td><td>39.60</td><td>62.00</td><td>52.00</td><td>91.00</td><td>54.00</td><td>39.80</td><td></td><td></td></tr><tr><td>2</td><td>68.00</td><td>68.00</td><td>39.60</td><td></td><td></td><td>91.00</td><td>54.00</td><td>84.00</td><td>91.00</td><td>97.00</td></tr><tr><td>3</td><td>52.00</td><td>41.50</td><td>39.60</td><td>62.00</td><td>52.00</td><td></td><td>54.00</td><td>56.80</td><td>91.00</td><td>97.00</td></tr><tr><td>4</td><td></td><td></td><td>39.60</td><td>52.00</td><td>52.00</td><td></td><td></td><td></td><td></td><td></td></tr></table> <table><tr><th>SIZE CLUTCH</th><th colspan="12">ACTUAL SIZE OF FREE LENGTH (mm)</th></tr><tr><th></th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>12</th></tr><tr><td>HIGHT</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>LOW</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>REVERSE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>FORWARD</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D85ESS-2	D155AX-3	D275A-2/3	D375A-5	HIGH	42.00	52.00									LOW			66.00								REVERSE	91.00	84.00	53.00	68.00	68.00	91.00	59.00	56.80	59.00	66.00	FORWARD			53.00	68.00	68.00	108.00	69.50	56.80	70.00	70.00	1	68.00	68.00	39.60	62.00	52.00	91.00	54.00	39.80			2	68.00	68.00	39.60			91.00	54.00	84.00	91.00	97.00	3	52.00	41.50	39.60	62.00	52.00		54.00	56.80	91.00	97.00	4			39.60	52.00	52.00						SIZE CLUTCH	ACTUAL SIZE OF FREE LENGTH (mm)													1	2	3	4	5	6	7	8	9	10	11	12	HIGHT													LOW													REVERSE													FORWARD													1													2													3													4													Straightness at coil spring, Crack or Discolouration Free length of spring, compare with standard as follow Dimension of spring free length as follow <table><tr><th colspan="4">DECISION</th></tr><tr><th>CLT</th><th>U/A</th><th>U/R</th><th>R/N</th></tr><tr><td>H</td><td></td><td></td><td></td></tr><tr><td>L</td><td></td><td></td><td></td></tr><tr><td>R</td><td></td><td></td><td></td></tr><tr><td>F</td><td></td><td></td><td></td></tr><tr><td>1</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td></tr></table>	DECISION				CLT	U/A	U/R	R/N	H				L				R				F				1				2				3				4																																																																																																																																																																																																	
MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D85ESS-2	D155AX-3	D275A-2/3	D375A-5																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
HIGH	42.00	52.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
LOW			66.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
REVERSE	91.00	84.00	53.00	68.00	68.00	91.00	59.00	56.80	59.00	66.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
FORWARD			53.00	68.00	68.00	108.00	69.50	56.80	70.00	70.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
1	68.00	68.00	39.60	62.00	52.00	91.00	54.00	39.80																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
2	68.00	68.00	39.60			91.00	54.00	84.00	91.00	97.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
3	52.00	41.50	39.60	62.00	52.00		54.00	56.80	91.00	97.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
4			39.60	52.00	52.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SIZE CLUTCH	ACTUAL SIZE OF FREE LENGTH (mm)																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	1	2	3	4	5	6	7	8	9	10	11	12																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
HIGHT																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
LOW																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
REVERSE																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
FORWARD																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
1																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
2																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
3																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
4																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
DECISION																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
CLT	U/A	U/R	R/N																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
H																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
L																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
R																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
F																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
1																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
2																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
3																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
4																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
14	DISC	VISUAL CHECK MEASUREMENT DIMENSION STANDARD THICKNESS OF DISC MAX WEAR ≤ 0,3 mm <table><tr><th>MODEL CLUTCH</th><th>HD 465-5</th><th>HD785-3</th><th>GD825A-2</th><th>WA500</th><th>WA600</th><th>WA800</th><th>D375A-5</th><th>D155AX-3</th><th>D275A-2/3</th><th>D375A-2/3</th></tr><tr><td>HIGH</td><td>5.40</td><td>5.40</td><td>5.00</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>LOW</td><td>5.00</td><td>5.40</td><td>5.00</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>REVERSE</td><td>5.40</td><td>5.20</td><td>5.00</td><td>5.40</td><td>5.40</td><td>5.40</td><td>4.80</td><td>5.00</td><td>4.80</td><td>4.80</td></tr><tr><td>FORWARD</td><td></td><td></td><td>5.00</td><td>5.40</td><td>5.40</td><td>5.40</td><td>4.80</td><td>5.00</td><td>4.80</td><td>4.80</td></tr><tr><td>1</td><td>5.40</td><td>5.40</td><td>5.00</td><td>5.40</td><td>5.40</td><td>5.40</td><td>5.00</td><td>5.00</td><td>5.00</td><td>5.00</td></tr><tr><td>2</td><td>5.40</td><td>5.40</td><td>5.00</td><td>5.00</td><td>5.00</td><td>5.40</td><td>4.80</td><td>5.00</td><td>4.80</td><td>4.80</td></tr><tr><td>3</td><td>5.40</td><td>5.40</td><td>5.00</td><td>5.40</td><td>5.40</td><td>5.40</td><td>4.80</td><td>5.00</td><td>4.80</td><td>4.80</td></tr><tr><td>4</td><td>5.00</td><td>5.40</td><td>5.00</td><td>5.40</td><td>5.40</td><td></td><td></td><td></td><td></td><td></td></tr></table> <table><tr><th rowspan="2">CLUTCH</th><th rowspan="2"></th><th colspan="9">NO OF DISC</th><th colspan="2">QUANTITY</th></tr><tr><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>GOOD</th><th>NOT GOOD</th></tr><tr><td rowspan="3">HIGH</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">LOW</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">REVERSE</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">FORWARD</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">1</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">2</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">3</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3">4</td><td>THICK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DISH</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>WARP</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D375A-5	D155AX-3	D275A-2/3	D375A-2/3	HIGH	5.40	5.40	5.00								LOW	5.00	5.40	5.00								REVERSE	5.40	5.20	5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80	FORWARD			5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80	1	5.40	5.40	5.00	5.40	5.40	5.40	5.00	5.00	5.00	5.00	2	5.40	5.40	5.00	5.00	5.00	5.40	4.80	5.00	4.80	4.80	3	5.40	5.40	5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80	4	5.00	5.40	5.00	5.40	5.40						CLUTCH		NO OF DISC									QUANTITY		1	2	3	4	5	6	7	8	9	GOOD	NOT GOOD	HIGH	THICK												DISH												WARP												LOW	THICK												DISH												WARP												REVERSE	THICK												DISH												WARP												FORWARD	THICK												DISH												WARP												1	THICK												DISH												WARP												2	THICK												DISH												WARP												3	THICK												DISH												WARP												4	THICK												DISH												WARP												Crack, Wear, at Teeth of Disc. Burn, Warp, Dish, and Damage Thickness, Warp, Dish, measure and rever to standard : In Warp a. Discs of 400 mm or more in O.D. Less than 0,6 mm b. Discs of less than 400 mm in O.D Less than 0,3 mm c. Brake Disc deformation less than 0,7 mm. In Dish a. Discs of 400 mm or more in O.D. less less than 0,2 mm b. Discs of less than 400 mm in O.D. less than 0,1 mm. <table><tr><th colspan="4">DECISION</th></tr><tr><th>CLT</th><th>U/A</th><th>U/R</th><th>R/N</th></tr><tr><td>H</td><td></td><td></td><td></td></tr><tr><td>L</td><td></td><td></td><td></td></tr><tr><td>R</td><td></td><td></td><td></td></tr><tr><td>F</td><td></td><td></td><td></td></tr><tr><td>1</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td></tr></table>	DECISION				CLT	U/A	U/R	R/N	H				L				R				F				1				2				3				4			
MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D375A-5	D155AX-3	D275A-2/3	D375A-2/3																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
HIGH	5.40	5.40	5.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
LOW	5.00	5.40	5.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
REVERSE	5.40	5.20	5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
FORWARD			5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
1	5.40	5.40	5.00	5.40	5.40	5.40	5.00	5.00	5.00	5.00																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
2	5.40	5.40	5.00	5.00	5.00	5.40	4.80	5.00	4.80	4.80																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
3	5.40	5.40	5.00	5.40	5.40	5.40	4.80	5.00	4.80	4.80																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
4	5.00	5.40	5.00	5.40	5.40																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
CLUTCH		NO OF DISC									QUANTITY																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
		1	2	3	4	5	6	7	8	9	GOOD	NOT GOOD																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
HIGH	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
LOW	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
REVERSE	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
FORWARD	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
1	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
2	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
3	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
4	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
DECISION																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
CLT	U/A	U/R	R/N																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
H																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
L																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
R																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
F																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
1																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
2																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
3																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
4																																																																																																																																																																																																																																																																																																																																																																																																																																																																														

MEASUREMENT CHECK SHEET POWER MODUL D375A-5	MACHINE MODEL	RECEIVING DATE	NUMBER.DOC
	COMP.MODEL	FINAL INSPEC	PUB.DATE 04/03/2013
	COMP S/N	DELIVERY DATE	REV.NO 00
	WO.NO	SITE	PAGE 4 of 6

No	PARTS NAME	MEASUREMENT DATA	FIGURE OF PARTS TO BE CHECKED																																																																																																																																																																																																																																																																																																																																																																																																																																																												
15	PLATES	VISUAL CHECK MEASUREMENT DIMENSION STANDARD THICKNESS OF PLATE WEAR MAX ≤ 0,3 mm <table border="1"> <thead> <tr> <th>MODEL CLUTCH</th> <th>HD 465-5</th> <th>HD785-3</th> <th>GD825A-2</th> <th>WA500</th> <th>WA600</th> <th>WA800</th> <th>D375A-3</th> <th>D165A-6</th> <th>D275A-2/3</th> <th>D375A-5</th> </tr> </thead> <tbody> <tr> <td>REVERSE</td> <td>5.80</td> <td>5.80</td> <td>5.00</td> <td></td> <td></td> <td></td> <td></td> <td>3.20</td> <td></td> <td>4.30</td> </tr> <tr> <td>FORWARD</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>3.20</td> <td></td> <td>4.30</td> </tr> <tr> <td>3</td> <td>5.80</td> <td>4.30</td> <td>5.00</td> <td>5.80</td> <td>5.80</td> <td>5.80</td> <td>4.30</td> <td>3.20</td> <td>4.30</td> <td>4.30</td> </tr> <tr> <td>2</td> <td>5.80</td> <td>4.30</td> <td>5.00</td> <td>5.80</td> <td>5.80</td> <td>5.80</td> <td>4.30</td> <td>3.20</td> <td>4.30</td> <td>4.30</td> </tr> <tr> <td>1</td> <td>5.80</td> <td>5.80</td> <td>5.00</td> <td>5.80</td> <td>5.80</td> <td>5.80</td> <td>4.00</td> <td>3.20</td> <td>4.00</td> <td>4.00</td> </tr> <tr> <td>ST CLUTCH</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>4.30</td> <td>2.90</td> <td>4.30</td> <td>2.90</td> </tr> <tr> <td>ST BRAKE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>4.30</td> <td>2.90</td> <td>4.30</td> <td>2.90</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">CLUTCH</th> <th rowspan="2"></th> <th colspan="9">NO OF DISC</th> <th colspan="2">QUANTITY</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>GOOD</th> <th>NOT GOOD</th> </tr> </thead> <tbody> <tr> <td rowspan="3">HIGH</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">LOW</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">REVERSE</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">FORWARD</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">1</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">2</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">3</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td rowspan="3">4</td> <td>THICK</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>DISH</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>WARP</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>	MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D375A-3	D165A-6	D275A-2/3	D375A-5	REVERSE	5.80	5.80	5.00					3.20		4.30	FORWARD								3.20		4.30	3	5.80	4.30	5.00	5.80	5.80	5.80	4.30	3.20	4.30	4.30	2	5.80	4.30	5.00	5.80	5.80	5.80	4.30	3.20	4.30	4.30	1	5.80	5.80	5.00	5.80	5.80	5.80	4.00	3.20	4.00	4.00	ST CLUTCH							4.30	2.90	4.30	2.90	ST BRAKE							4.30	2.90	4.30	2.90	CLUTCH		NO OF DISC									QUANTITY		1	2	3	4	5	6	7	8	9	GOOD	NOT GOOD	HIGH	THICK												DISH												WARP												LOW	THICK												DISH												WARP												REVERSE	THICK												DISH												WARP												FORWARD	THICK												DISH												WARP												1	THICK												DISH												WARP												2	THICK												DISH												WARP												3	THICK												DISH												WARP												4	THICK												DISH												WARP												Crack, Wear, at Teeth of Plates Burn, Warp, Dish, and Damage Thickness, Warp, Dish, measure and rever to standard : In Warp a. Plates of 400 mm or more in O.D. Less than 0,6 mm b. Plates of less than 400 mm in O.D. Less than 0,3 mm c. Brake Plates deformation less than 0,7 mm. In Dish a. Plates of 400 mm or more in O.D. less less than 0,2 mm b. Plates of less than 400 mm in O.D. less than 0,1 mm. <table border="1"> <thead> <tr> <th colspan="4">DECISION</th> </tr> <tr> <th>CLT</th> <th>U/A</th> <th>U/R</th> <th>R/N</th> </tr> </thead> <tbody> <tr> <td>R</td> <td></td> <td></td> <td></td> </tr> <tr> <td>F</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ST</td> <td></td> <td></td> <td></td> </tr> <tr> <td>SB</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	DECISION				CLT	U/A	U/R	R/N	R				F				3				2				1				ST				SB			
MODEL CLUTCH	HD 465-5	HD785-3	GD825A-2	WA500	WA600	WA800	D375A-3	D165A-6	D275A-2/3	D375A-5																																																																																																																																																																																																																																																																																																																																																																																																																																																					
REVERSE	5.80	5.80	5.00					3.20		4.30																																																																																																																																																																																																																																																																																																																																																																																																																																																					
FORWARD								3.20		4.30																																																																																																																																																																																																																																																																																																																																																																																																																																																					
3	5.80	4.30	5.00	5.80	5.80	5.80	4.30	3.20	4.30	4.30																																																																																																																																																																																																																																																																																																																																																																																																																																																					
2	5.80	4.30	5.00	5.80	5.80	5.80	4.30	3.20	4.30	4.30																																																																																																																																																																																																																																																																																																																																																																																																																																																					
1	5.80	5.80	5.00	5.80	5.80	5.80	4.00	3.20	4.00	4.00																																																																																																																																																																																																																																																																																																																																																																																																																																																					
ST CLUTCH							4.30	2.90	4.30	2.90																																																																																																																																																																																																																																																																																																																																																																																																																																																					
ST BRAKE							4.30	2.90	4.30	2.90																																																																																																																																																																																																																																																																																																																																																																																																																																																					
CLUTCH		NO OF DISC									QUANTITY																																																																																																																																																																																																																																																																																																																																																																																																																																																				
		1	2	3	4	5	6	7	8	9	GOOD	NOT GOOD																																																																																																																																																																																																																																																																																																																																																																																																																																																			
HIGH	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
LOW	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
REVERSE	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
FORWARD	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
1	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
2	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
3	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
4	THICK																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	DISH																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	WARP																																																																																																																																																																																																																																																																																																																																																																																																																																																														
DECISION																																																																																																																																																																																																																																																																																																																																																																																																																																																															
CLT	U/A	U/R	R/N																																																																																																																																																																																																																																																																																																																																																																																																																																																												
R																																																																																																																																																																																																																																																																																																																																																																																																																																																															
F																																																																																																																																																																																																																																																																																																																																																																																																																																																															
3																																																																																																																																																																																																																																																																																																																																																																																																																																																															
2																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1																																																																																																																																																																																																																																																																																																																																																																																																																																																															
ST																																																																																																																																																																																																																																																																																																																																																																																																																																																															
SB																																																																																																																																																																																																																																																																																																																																																																																																																																																															
			Note : U/A = Use Again U/R = Use After Repair R/N = Replace With New Parts																																																																																																																																																																																																																																																																																																																																																																																																																																																												



PT SAPTAINDRA SEJATI

POWERMODULE

ASSEMBLY

CHECKSHEET

MACHINE MODEL

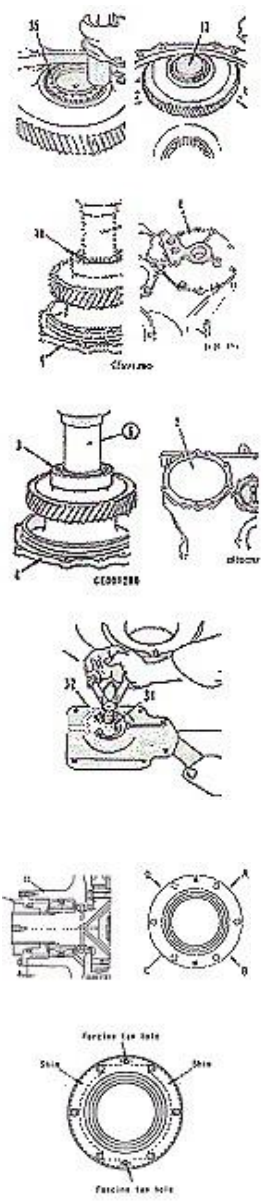
D375A-6

RO NO :

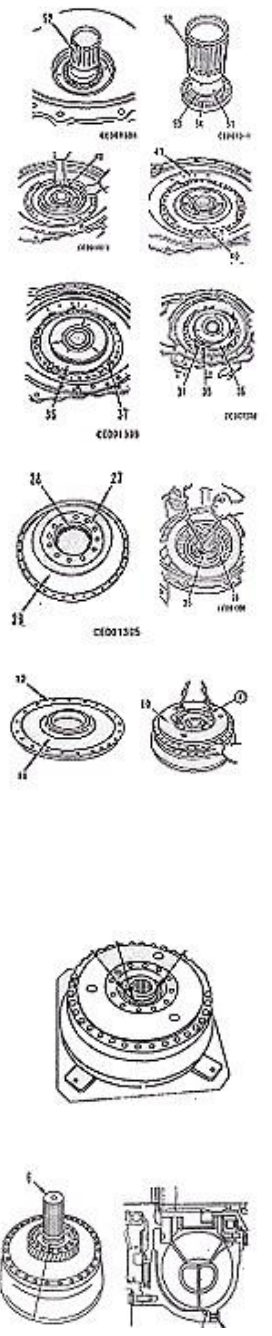
POWERTRAIN SECTION

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	1 of 8

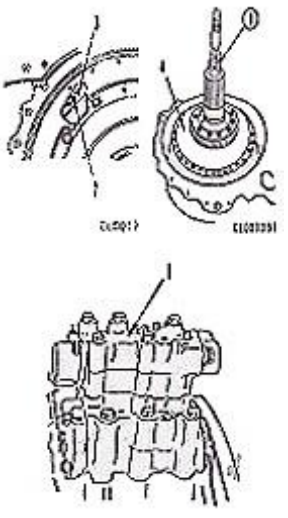
PROCESS	START		ASSEMBLY BY	
	FINISH			

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
1	ASSEMBLY OF PTO ASSEMBLY	- Torque bolt lock plate Act : kgm - Check that / idle gear rotates smoothly - Check the Power Train Gear rotates smoothly. Torque bolt cover. Act : kgm - Check the hyd & ppc pump gear rotates smoothly. - Torque bolt cover. Act : kgm - Check that snap ring is in good position. - Check the scavenging pump gear rotates smoothly - Check that oil seal is in good position. - Shim installed. Act : mm - Torque bolt retainer. Act : kgm	- Std torque : 11 ~ 11.50 Kgm. - Thread tightener LT2. - Press with push tool or heat temp 110°C~ 120°C - Put drops EO SAE30-CD and rotates about 10 times - Std torque : 11 ~ 12.50 Kgm - Press with push tools or heat temperature 110°C ~ 120°C. - Put drops oil SAE30-CD and rotates about 10 time - Std torque : 11 ~ 12.50 Kgm - Used special tool for Press Bearing - Coat outer of seal oil with LG 6. - Adjust shim of retainer Ukur "a" pada 4 posisi - Tebal Shim Std "a" + 0 -0.05 mm - Pasang shim seperti gambar , shim tidak menutupi lubang screw tap " H " - Torque bolt retainer. 6 ~ 7.50 Kgm				






ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	2 of 8

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
2	ASSEMBLY OF T/CONVERTER ASSEMBLY	- Check snap ring is filed securely in the groove - Check that bushing is not deformation when press fitting - Torque bolt stator shaft Act : kgm - Check that position of seal ring facing is in good position - Check that spring are fitted securely in the holes of piston and housing - Torque bolt stator housing Act : kgm - Torque bolt retainer pump Act : kgm - Be careful not to damage seal ring when install pump - Check the pump rotates smoothly - Make sure that seal ring is not damage when assembly - Torque bolt lock-up housing Act : kgm - Align position hole of input shaft and l/up clutch housing - Torque bolt input shaft Act : kgm	- Coat all seal ring with G2-L1 Press with Push tool or install bearing must be heater 110°C ~ 120°C Thread tightened LT2 - Std Torque : 6 ~ 7.50 Kgm - Seal ring facing position refer to shop manual (page : 30-91) - Tread tightener LT-2 - Std Torque : 11 ~ 11.50 Kgm - Tread tightener lt-2 - Std Torque : 6 ~ 7.50 Kgm - Coat seal ring with grease G2-L1 - Tread tightener LT-2 - Std Torque : 11 ~ 11.50 Kgm - Thread tightener LT-2 - Std Torque : 18.50 Kgm				

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	3 of 8

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
		- Align position of turbine oil groove and drain plug - Torque bolt Drive Case & Pump Act : kgm - Torque drain plug Act : kgm - Torque bolt Control Valve Act : kgm	- Thread tightener LT-2 - Std Torque : 5.00 ~ 6.00 Kgm - Std Torque : 1.15 ~ 1.20 Kgm - Std Torque : 5.00 ~ 6.00 Kgm				
3	ASSEMBLY OF TRANSMISSION ASEMBLY	- Before assembly transmission must measuring bearing seat in Foward Reverse & 2 nd spacer. - OD Spacer F & R Front side Act : kgm Rear side Act : kgm - OD Spacer 2 Nd Act : kgm - Make sure that installation of seal groove is correct - Torque bolt plate Act : kgm	- Measuring with OD Micrometer tool.\ - Std Measuring : 105 mm 120 mm 120 mm - Tread tightener LT-2 - Std Torque : 11.25~12.50Kgm				

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	4 of 8

		- Check that snap ring is fitted and securely in the groove - Torque bolt plate Act : kgm - Assy that the gear carrier rotates smoothly - Check position of seal ring groove is correct - Check that the rotary clutch rotates smoothly after install - Torque bolts Housing 1ST Clutch Act : kgm	- Press with push tools or heat 100^oc - Thread tightener LT-2 - Std Torque : 3.2 ~3.50Kgm - Position of seal ring groove refer to shop manual (page : 30 ~115 ~116) - Press with push tools - Thread tightener LT-2 - Std Torque : 18 ~ 20 Kgm		   		
NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
		- Make sure that seal ring not to damage when install - Check that seal ring is not damage when assy	- Knock in the housing or piston with plastic hammer				 

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)

WO NUMBER		DOC.NO.	
COMP. MODEL		PUB. DATE	
COMP. S/N		REV. NO	02
MACHINE MODEL		PAGE	5 of 8

- make sure that the slits of sleeve are at the bottom
- check that the gear rotates smoothly

Unit MM	
No of Clutch	Std Free length of spring
1 st	7.75
2 nd 3 rd	97.0
F	70.0
R	66.0


- Be careful not to get the seal ring caught
- Check that the carrier rotates smoothly

Unit MM			
No Of Clutch	Length of Pin	Torque Pin	Guide Pin
2 nd & 3 rd		162	360
F & R		199	

- Coat seal ring with G2-L1



- Check that the gear rotates smoothly



- Be careful not to get the seal ring damage
- Torque Blots

Act : kgm





- Coat seal ring with G2-L1
- Std Torque :
26 ~ 28 Kgm



ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	6 of 8

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED																				
				MEC	GL	QA																					
		PISTON STROOKE Act : Kg/cm² Air pressure std. 5 ~ 6 kg/cm² <table><tr><td>Unit model</td><td colspan="2">D375A-2,3</td></tr><tr><td>Piston No</td><td>STD</td><td>ACT</td></tr><tr><td>R Clutch</td><td>6.7</td><td></td></tr><tr><td>F Clutch</td><td>7.0</td><td></td></tr><tr><td>3rdClutch</td><td>5.5</td><td></td></tr><tr><td>2ndClutch</td><td>4.7</td><td></td></tr><tr><td>1st Clutch</td><td>7.0</td><td></td></tr></table>	Unit model	D375A-2,3		Piston No	STD	ACT	R Clutch	6.7		F Clutch	7.0		3 rd Clutch	5.5		2 nd Clutch	4.7		1 st Clutch	7.0					
Unit model	D375A-2,3																										
Piston No	STD	ACT																									
R Clutch	6.7																										
F Clutch	7.0																										
3 rd Clutch	5.5																										
2 nd Clutch	4.7																										
1 st Clutch	7.0																										
		- Torque Bolt Housing Transmission Act : kgm - Torque Bolt C/Valve Act : kgm - Torque Bolt Cover C/Valve Act : kgm	- Std Torque : 26.5 ~ 28 Kgm - Std Torque : 5 ~ 5.5 Kgm - Std Torque : 5 ~ 5.5 Kgm																								
4	ASSEMBLY OF STEERING CASE ASSY	- Torque Nut Bevel Act : kgm - Torque Bolt Cage Act : kgm - Check Bevel Gear Rotates Smoothly - Shim Thickness <table><tr><td rowspan="2">ACT</td><td>LH</td><td>MM</td></tr><tr><td>RH</td><td>MM</td></tr></table>	ACT	LH	MM	RH	MM	- Threads tightener LT2 - Std Torque : 28 ~ 30 Kgm - Threads tightener LT2 - Std Torque : 18 Kgm - Press fit or Heat to 110°C ~ 120°C every install bearing - Std Thickness Shim = 2 mm																			
ACT	LH	MM																									
	RH	MM																									

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	7 of 8

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
		- Pre load bevel gear Act : kg - Torque Bolt Transfer cage Act : kgm - Torque Bolt Holder Pinion Act : kgm - Torque Bolt Cage Assy Act : kgm - Shim Thickness Act : mm - Check that bevel and Pinion rotates smoothly - Adjust backlash and Tooth contact - Backlash Act : mm - Tooth contact Act : % - Torque Bolt Cage after adjust bevel gear Act : kgm - Torque Bolt Valve Seat Act : Kgm - Torque Bolt Mounting Steering Brake Assy Act : Kgm - Torque Bolt Mounting C/Valve Assy Act : Kgm	- Std Pre load Bevel gear 2.4 ~ 2.9 Kg - Thread Tighten with LT2 - Std Torque: 18 ~ 20 Kgm - Std Torque : 28 ~ 29 Kgm - Std Torque : 18 ~ 20 Kgm - Std Thickness Shim = 2 mm - Std Backlash 0.3 ~ 0.4 mm - Std Tooth contact a. Width 30~75% b. Center 25~50% c. Position 25~50% - Thread tightener LT2 - Std Torque : 18 ~ 20 Kgm - Std Torque: 11 ~ 12,5 Kgm - Std Torque : 28 ~ 30 Kgm - Std Torque : 5 ~ 5.5 Kgm				       

ASSEMBLY CHECK SHEET POWER MODULE (D375A-6R)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	
	COMP. S/N		REV. NO	02
	MACHINE MODEL		PAGE	8 of 8

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	GL	QA	
		- Torque bolt connection Steering Case to T/M Assy Act : Kgm	- Std Torque : 28 ~ 29 Kgm				

[illegible]

ASSEMBLY BY (MECHANIC)	INSPECTED & APPROVED BY (QA) (SUPERVISOR)
---	--

DOCUMENT NO	
PUBLICATION	
REVISION	
PAGE	

MACHINE	MODEL		TEST DATE	
	S/N		TEST BY	
T.CONVERTER	MODEL		USED OIL	SAE 30
	S/N		OIL TEMP	50° ± 5° C
TRANSMISSION	MODEL		FLOW RATE (Std)	
	S/N		FLOW RATE (Act)	
WO.NO			RPM(Std)	750 ± 50 RPM
			RPM(Act)	

DESCRIPTION	STANDARD (kg/cm2)		ACTUAL	REMARK
MAIN RELIEF	25.3 - 29.3			
TC INLET	Neutral	2 - 5		
	Relief	9 - 12		
TC OUTLET	Neutral	1 - 4		
	Relief	9 - 12		
LUB PRESSURE TRANSMISSION	0.3 - 2.0			
SUDDEN BRAKE PREVENTIVE	13 - 16			

CLUCTH		1st	2nd	3rd	F	R	LU	STATOR	RC	LC	RB	LB
PRESSURE	STD	19 - 22	18 - 25	18 - 25	18 - 25	18 - 25	19.8 - 23.8	19.7 - 23.7	23 - 29	23 - 29	23 - 29	23 - 29
	ACT											
FILLING TIME	STD	0.5-1.5	0.2-1.2	0.3-1.5	0.3-1-1	0.3-1.5						
	ACT											

OIL LEAKAGE	EXCESSIVE HEAT	BREAKAGE / CRACK	ABNORMAL NOISE
☐ YES ☐ NO	☐ YES ☐ NO	☐ YES ☐ NO	☐ YES ☐ NO

NOTE :

TEST BY	APPROVED BY
MEKANIK	QA / GL



PT SAPTAINDRA SEJATI

CONTROL VALVE DISASSEMBLY

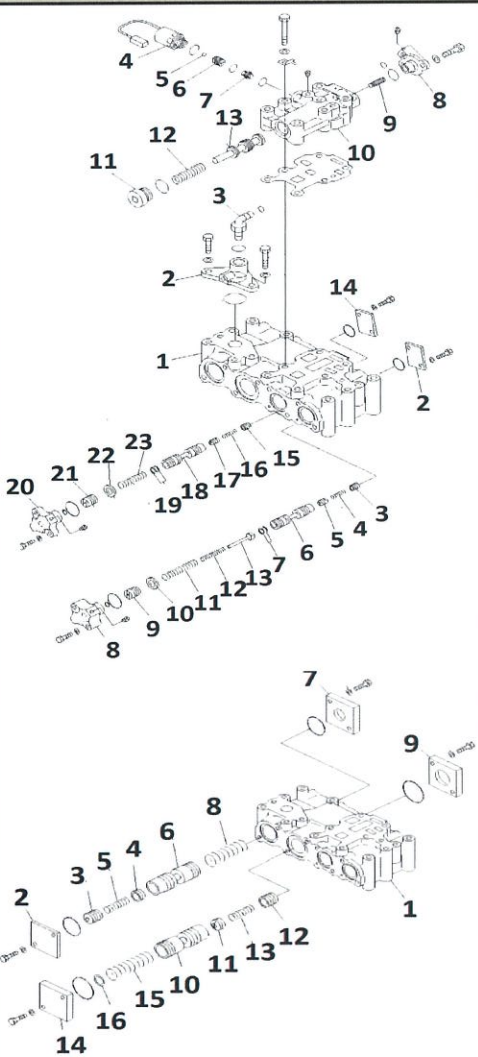
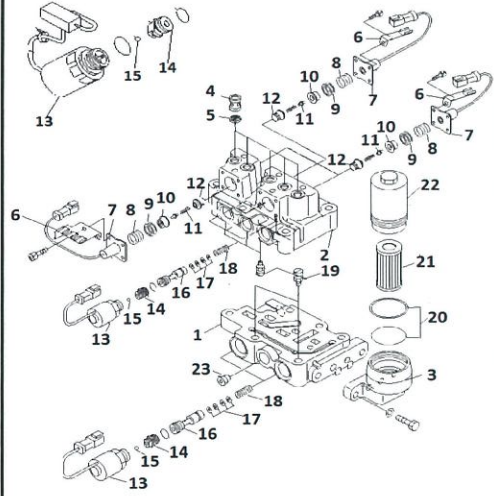
CHECKSHEET

MACHINE MODEL

D375A-6

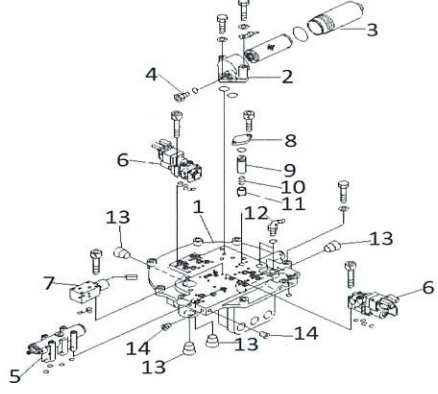
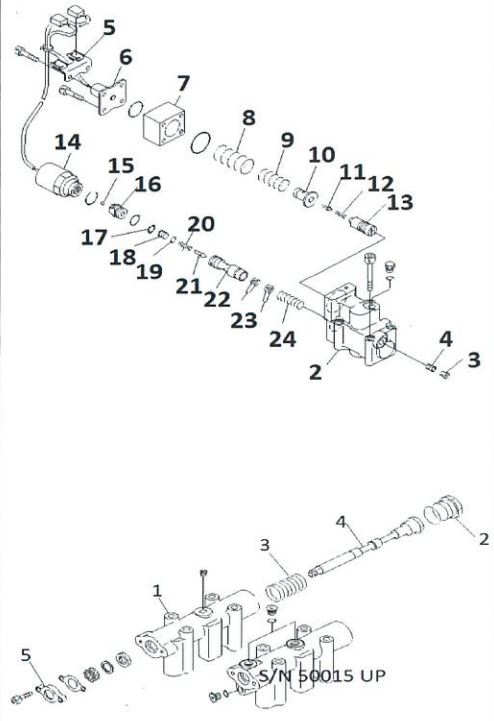
RO NO :

POWERTRAIN SECTION

DISASSEMBLY CHECK SHEET		WO NUMBER	DOCUMENT NO				
CONTROL VALVE		COMP.MODEL	PUBLIC DATE				
D 375A - 5		COMP.S/N	REVISION NO				
		UNIT MODEL	PAGE				
			R 00				
			1 of 7				
PROCESS	START FINISH	DISASSEMBLY BY					
NO	PART TO REMOVE OR INSPECT	CONDITION TOBE INSPECTED	REUSE	SALVAGE	REPAIR	SKETCH DRAWING OR PHOTHOES	REMARK
1	TORQUE CONVERTER RELIEF VALVE DISASSEMBLY	⚠ IMPORTANT ⚠ Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spoll valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Remove solenoid valve (4 plug (7) from valve body (10) - Remove ball (5) valve (6) from solenoid (4) - Remove plug (11), then remove spring (12) from valve body (10) - Remove cover (8), remove piston (9) then remove selector valve (13) from valve body (10) - Remove cover (2), then remove piston (3)(5) and spring (4).from body (1) - Remove lock up valve (6) and shims (7) from body (1) - Remove cover (8), then piston valve (9),spring (11)(12), and shaft (13) from body (1) - Remove cover (20), then remove piston (21) ring (22) and spring (23)from body (1) - Remove cover (14), then remove stator valve (18),spring (16), and piston valve (17)(15) from body (1) - Remove cover (9), then remove piston valve (11)(12) and spring (13) from body (1) - Remove torque converter relief valve (10) from body (1) - Remove cover (14) shims (16) and spring (15) from body (1) - Remove cover (2) piston valve (3)(4) and spring (5) from body (1) - Remove main relief valve (6) from body (1) - Remove cover (7) and spring (8) from body (1)					
2	TRANSMISI CONTROL VALVE DISASSEMBLY	⚠ IMPORTANT ⚠ Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spoll valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Remove filter assy (3) from body (1) - Remove filter (21) from housing filter (3) - Remove body (2) from body (1) - Remove bracket (6) and flow detector valve from body (2) - Remove spring (8) shims (9) from seat (10) - Remove pin (11) and valve (12) from body (2) - Remove solenoid (13) from body (1) - Remove valve (14) and ball (15) from solenoid (13) - Remove valve (16) shims (17) and spring (18) from body (1)					

DISASSEMBLY CHECK SHEET CONTROL VALVE D 375A - 5	WO NUMBER		DOCUMENT NO	
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	R 00
	UNIT MODEL		PAGE	2 of 7

PROCESS	START FINISH		DISASSEMBLY BY	
---------	-----------------	--	----------------	--

NO	PART TO REMOVE OR INSPECT	CONDITION TOBE INSPECTED	REUSE	SALVAGE	REPAIR	SKETCH DRAWING OR PHOTHOES	REMARK
3	VALVE SEAT DISASSEMBLY	⚠ IMPORTANT ⚠ Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spoll valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Remove filter assy (3) from valve seat (1) and than Remove filter body (3) from filter head (2) - Remove ECMV steering and brake assy (6) from valve seat (1) - Remove sudent stop ECMV (7) from valve seat (1) - Remove Parking brake assy (5) from valve seat (1) - Remove plug (13) and plug (14) from valve seat (1)					
4	STERING AND BRAKE ECMV DISASSEMBLY	⚠ IMPORTANT ⚠ Keep the removed parts so that they will not be damaged.Examine valve body (2) and spool (22) as well as spring (24)for the existancecof plating film pieces and other metallic particles Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spoll valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Remove solenoid (14) and spool (22) from valve body (2).a When disassembling the valve, check that the spool moves smoothly - Remove bracket (5) and flow detector assembly(7). - Remove spring (24) and shims (23) .a Check the quantity and thickness of the shims - Remove seat (10), spring (8)(9) and pin (11).spring (12) and spool (13) from body(2) - Remove plug (3) and orifice (4) from body (2) - Remove plug (2) from parking body (1) - Remove valve parking brake (4) and spring (3) from parking body (1) - Remove cover (5) gasket, seal and ring from parking housing (1)					

NOTE

INSPECTION BY

APPROVE BY

MECHANIC

GROUP LEADER (GL)



PT SAPTAINDRA SEJATI

CONTROL VALVE MEASUREMENT CHECKSHEET MACHINE MODEL

D375A-6

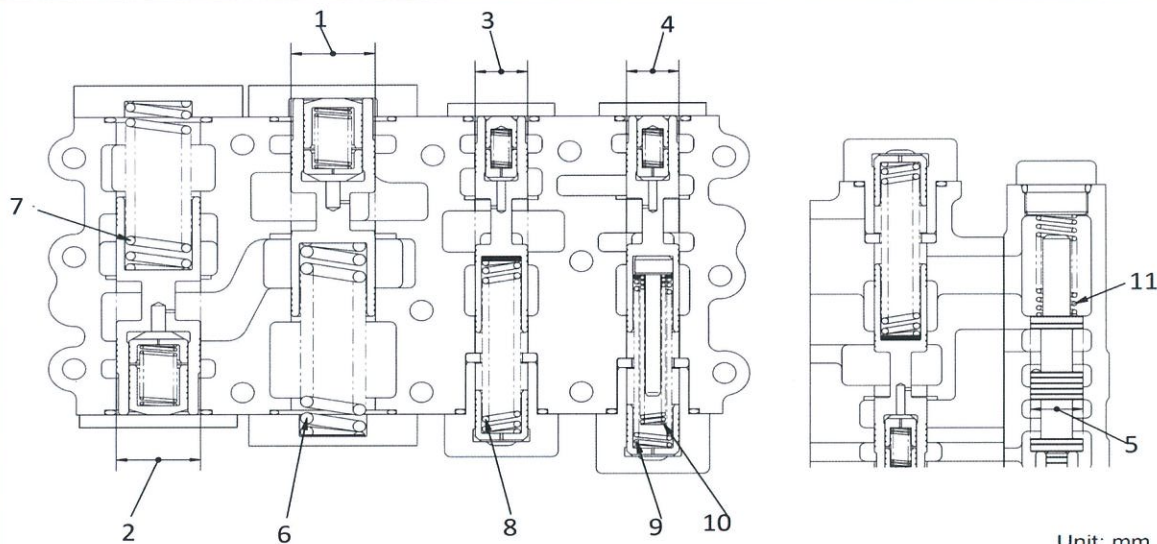
RO NO :

POWERTRAIN SECTION

MEASUREMENT CHECK SHEET CONTROL VALVE D 375A - 5	WO NUMBER		DOCUMENT NO	
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	R 00
	UNIT MODEL		PAGE	3 of 7

PROCESS	START FINISH		MEASUREMENT BY	
---------	-----------------	--	----------------	--

NO	PART TO MEASURING OR INSPECT	STANDARD VALUE TABLE
----	------------------------------	----------------------



No.	Check item	Criteria					Actual
		Standard size	Tolerance		Standard clearance	Clearance limit	
1	Clearance between main relief valve and valve body	40	-0.035 -0.045	+0.016 0	0.035 - 0.061	0.08	
2	Clearance between torque converter relief valve and valve	40	-0.035 -0.045	+0.016 0	0.035 - 0.061	0.08	
3	Clearance between stator clutch modulating valve and valve body	25	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
4	Clearance between lock-up clutch modulating valve and valve body	25	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
5	Clearance between lock-up valve and valve body	25	-0.020 -0.030	+0.013 0	0.020 - 0.043	0.06	
6	Main relief valve spring	Standard size			Repair limit		
		Free length	Installed length	Installed load	Free length	Installed load	
		120.3	103	1,339.4 N {136.7 kg}	116.7	1,272.4 N {129.9 kg}	
7	Torque converter relief valve spring	116.92	90.8	550.4 N {56.16 kg}	113.41	523.2 N {53.35 kg}	
8	Stator clutch modulating valve spring	103.5	95.2	151.9 N {15.5 kg}	100.4	144.4 N {14.7 kg}	
9	Lock-up clutch modulating valve spring (Outside)	141.4	88.7	158.6 N {16.18 kg}	137.16	150.7 N {15.37 kg}	
10	Lock-up clutch modulating valve spring (Inside)	80.5	80.5	—	78.09	—	
11	Lock-up valve spring	66	54.0	55.9 N {5.7 kg}	64.0	53.1 N {5.42 kg}	

NOTE

INSPECTION BY

APPROVE BY

MECHANIC

GROUP LEADER (GL)

GROUP LEADER (GL)



PT SAPTAINDRA SEJATI

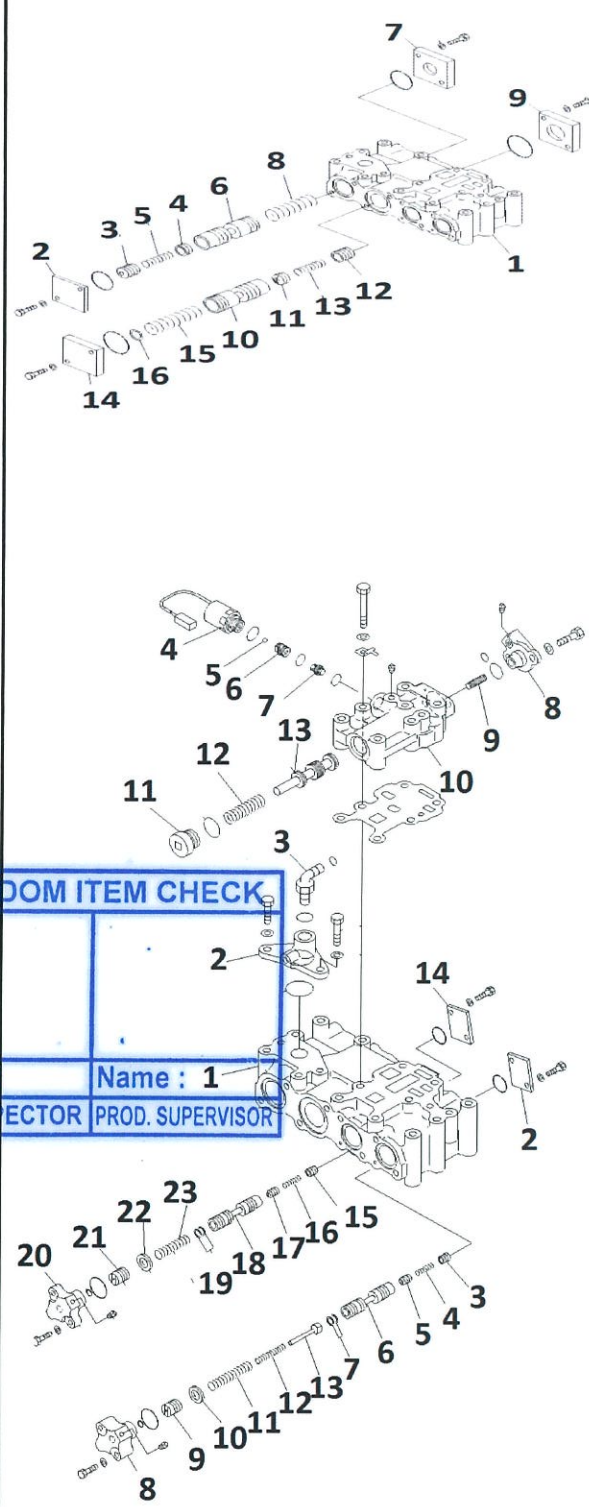
CONTROL VALVE ASSEMBLY CHECKSHEET MACHINE MODEL

D375A-6

RO NO :

POWERTRAIN SECTION

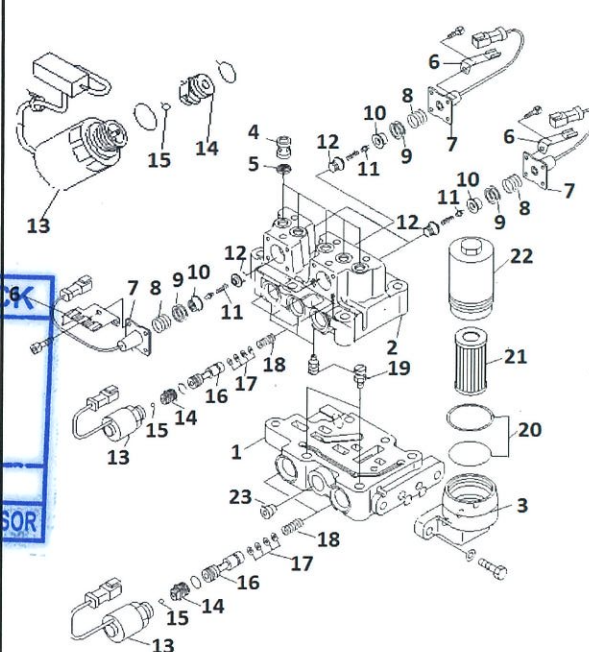
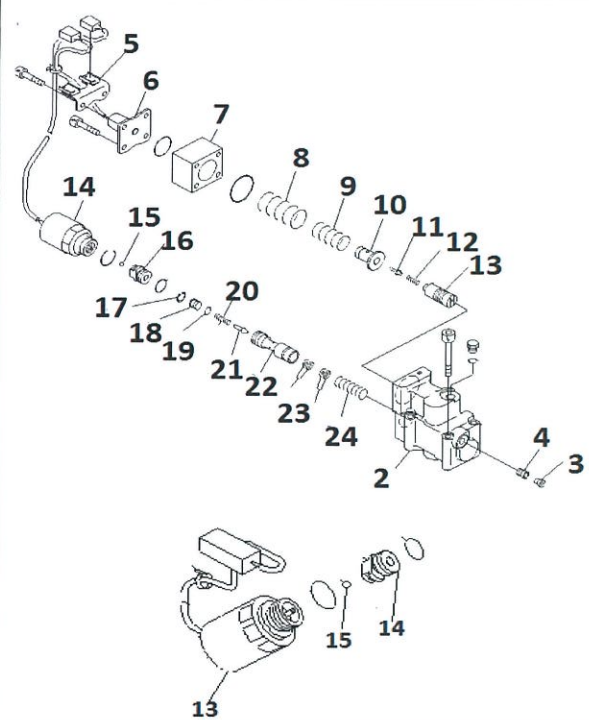
ASSEMBLY CHECK SHEET CONTROL VALVE D 375A - 5		WO NUMBER	DOCUMENT NO
		COMP.MODEL	PUBLIC DATE
		COMP.S/N	REVISION NO
		UNIT MODEL	PAGE
PROCESS		START	ASSEMBLY BY
FINISH			

NO	PART TO INSTALL OR ASSEMBLY	CONDITION TOBE INSTALL	MECH	GL/QA	SKETCH DRAWING OR PHOTHOES																												
1	TORQUE CONVERTER RELIEF VALVE ASSEMBLY	⚠ IMPORTANT ⚠ Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spill valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Install cover (7) and spring (8) to body (1) - Install main relief valve (6) to body (1) - Install piston valve (3)(4) spring (5)and cover (2) to body (1) Tightening bolt <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">6.5 ± 0.5 kgm</td> <td></td> </tr> </table> - Install shims (16) spring (15) and cover (14) body (1) - Install torque converter relief valve (10) to body (1) - Install piston valve (11)(12) spring (13)and cover (9), to body (1) Tightening bolt <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">6.5 ± 0.5 kgm</td> <td></td> </tr> </table> - Install stator valve (18),spring (16), and piston valve (17)(15) install cover (14) to body (1) Install piston (21) ring (22) and spring (23) and cover (20)to body (1) Tightening bolt <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">6.5 ± 0.5 kgm</td> <td></td> </tr> </table> - Install spring (11)(12), and shaft (13) Install cover , then piston valve (9) (8) to body (1) - INstall lock up valve (6) and shims (7) to body (1) - Install spring (4) cover (2), then Install piston (3)(5).to body (1) Tightening bolt <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">6.5 ± 0.5 kgm</td> <td></td> </tr> </table> - Install selector valve (13) cover (8) piston (9) to valve body (10) - Install plug (11), then Install spring (12) to valve body (10) Tightening bolt & plug (11) <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">6.5 ± 0.5 kgm</td> <td></td> </tr> </table> - Install ball (5) valve (6) to solenoid (4) Tightening valve (14) <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">2.0 ± 0.2 Kgm</td> <td></td> </tr> </table> - Install solenoid valve (4) plug (7) to valve body (10) Tightening solenoid <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">Standard</td> <td style="width:50%; text-align: center;">Actual</td> </tr> <tr> <td style="text-align: center;">5.0 ± 0.5 kgm</td> <td></td> </tr> </table>	Standard	Actual	6.5 ± 0.5 kgm		Standard	Actual	6.5 ± 0.5 kgm		Standard	Actual	6.5 ± 0.5 kgm		Standard	Actual	6.5 ± 0.5 kgm		Standard	Actual	6.5 ± 0.5 kgm		Standard	Actual	2.0 ± 0.2 Kgm		Standard	Actual	5.0 ± 0.5 kgm				
Standard	Actual																																
6.5 ± 0.5 kgm																																	
Standard	Actual																																
6.5 ± 0.5 kgm																																	
Standard	Actual																																
6.5 ± 0.5 kgm																																	
Standard	Actual																																
6.5 ± 0.5 kgm																																	
Standard	Actual																																
6.5 ± 0.5 kgm																																	
Standard	Actual																																
2.0 ± 0.2 Kgm																																	
Standard	Actual																																
5.0 ± 0.5 kgm																																	

RANDOM ITEM CHECK

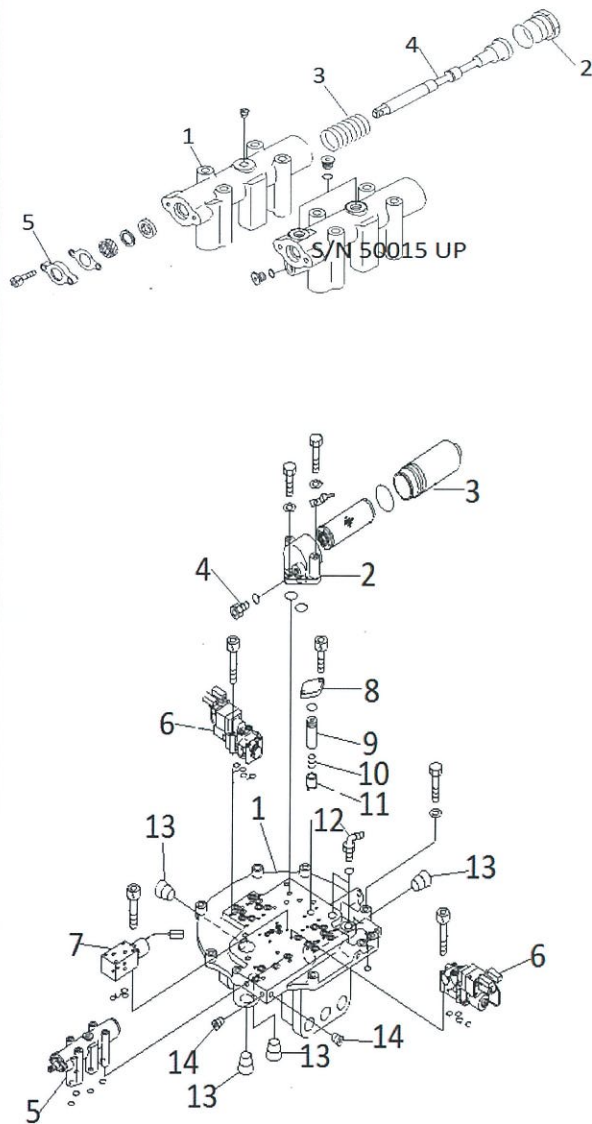
Name : _____	Name : 1 _____
QA INSPECTOR	PROD. SUPERVISOR

ASSEMBLY CHECK SHEET		WO NUMBER	DOCUMENT NO
CONTROL VALVE		COMP.MODEL	PUBLIC DATE
D 375A - 5		COMP.S/N	REVISION NO
		UNIT MODEL	PAGE
PROCESS	START FINISH	ASSEMBLY BY	

NO	PART TO INSTALL OR ASSEMBLY	CONDITION TOBE INSTALL	MECH	GL/QA	SKETCH DRAWING OR PHOTHOES																
2	TRANSMISI CONTROL VALVE ASSEMBLY	⚠ IMPORTANT ⚠ Inspect each part thoroughly and confirm that the part is free from dirt/dust, scratches. Be certain to reassemble all spools and plungers into their original valve body bores. a When installing the spool, check that it moves smoothly. Standard number of shims: 3 Standard shim thickness: 1.5 mm (Thickness of 1 shim: 0.2 mm, 0.5 mm) - install ball (15) valve (14) and plug (26) fit O-Ring to solenoid (13)  Tightening valve (14) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>2.0 ± 0.2 Kgm</td> <td></td> </tr> </table> - Install shims (17) and spring (18) to spool (16), and then install the spool to body (1) (2)  Tightening solenoid <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>5.0 ± 0.5 kgm</td> <td></td> </tr> </table> - Install sleeve (12)(10), pin (11), to valve body (2). - Install shim (9) and spring (8) to spring seat (10) - Install switch assembly (7) and bracket (6) to valve body (2).  Tightening bolt (19) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>0.5 ± 0.2 kgm</td> <td></td> </tr> </table> Install filter assy (3) to body (1)  Tightening bolt <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>6.5 ± 0.5 kgm</td> <td></td> </tr> </table>	Standard	Actual	2.0 ± 0.2 Kgm		Standard	Actual	5.0 ± 0.5 kgm		Standard	Actual	0.5 ± 0.2 kgm		Standard	Actual	6.5 ± 0.5 kgm				
Standard	Actual																				
2.0 ± 0.2 Kgm																					
Standard	Actual																				
5.0 ± 0.5 kgm																					
Standard	Actual																				
0.5 ± 0.2 kgm																					
Standard	Actual																				
6.5 ± 0.5 kgm																					
3	STEERING & BRAKE ECMV ASSEMBLY	- Install plug (3) and orifice (4) to body (2) - Install seat (10), spring (8)(9) and pin (11).spring (12) and spool (13) to body(2) - Install bracket (5) and flow detector assembly(6).to body (2)  Tightening bolt <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>0.5 ± 0.2 kgm</td> <td></td> </tr> </table> - Install spring (24) and shims (23) .a Check the quantity and thickness of the shims - Install solenoid (14) and spool (22) to valve body (2).a When assembling the valve, check that the spool moves smoothly  Tightening valve (14) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>2.0 ± 0.2 Kgm</td> <td></td> </tr> </table>  Tightening solenoid <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>5.0 ± 0.5 kgm</td> <td></td> </tr> </table>	Standard	Actual	0.5 ± 0.2 kgm		Standard	Actual	2.0 ± 0.2 Kgm		Standard	Actual	5.0 ± 0.5 kgm								
Standard	Actual																				
0.5 ± 0.2 kgm																					
Standard	Actual																				
2.0 ± 0.2 Kgm																					
Standard	Actual																				
5.0 ± 0.5 kgm																					

ASSEMBLY CHECK SHEET		WO NUMBER	DOCUMENT NO
CONTROL VALVE		COMP.MODEL	PUBLIC DATE
D 375A - 5		COMP.S/N	REVISION NO
		UNIT MODEL	PAGE
			R 00
			7 of 7

PROCESS	START	ASSEMBLY BY
	FINISH	

NO	PART TO INSTALL OR ASSEMBLY	CONDITION TOBE INSTALL	MECH	GL/QA	SKETCH DRAWING OR PHOTHOES
4	VALVE SEAT ASSEMBLY	● Install gasket, seal and ring and than install cover (5) to parking brake housing (1) Tightening bolt Standard 0.5 ± 0.2 kgm Actual ● Install valve parking brake (4) and spring (3) to parking brake body (1) ● Install plug (2) and fit O-ring parking brake body (1) Tightening bolt Standard 6.5 ± 0.5 kgm Actual ● Install fitting (6) plug (8) and plug (9) to valve seat (1) ● Install cover (8) spring (10) and valve (11)(9) to valve seat (1) Tightening bolt cover (14) Standard 1.3 ± 0.1 kgm Actual ● Install parking brake valve (5) to vave seat (1) Tightening bolt body (5) Standard 2.3 ± 0.2 kgm Actual ● Install filter assy (2) and plug (4) to valve seat (1) Tightening filter (2) Standard 4.0 ± 0.5 kgm Actual Tightening plug (4) Standard 1.8 ± 0.2 kgm Actual Tightening bolt filter Standard 6.5 ± 0.5 kgm Actual ● Install sudent stop ECMV(7) to valve seat (1) Tightening bolt Ecmv Standard 0.9 ± 0.1 kgm Actual ● Install ECMV assy (6) to valve seat (1) Tightening bolt Ecmv Standard 0.9 ± 0.1 kgm Actual 			

NOTE

INSPECTION BY

MECHANIC

APPROVE BY

GROUP LEADER (GL)