

REV. 00



SERVICES

PT. SAPTAINDRA SEJATI

PLANT REBUILD CENTER

DIFFERENTIAL & FINAL DRIVE RECEIVING INSPECTION CHECK SHEET

MACHINE MODEL

GD 825-2

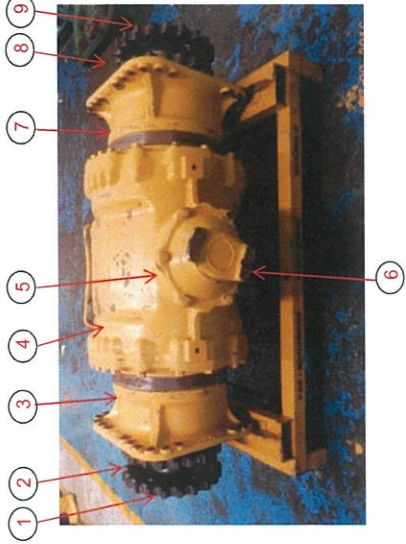
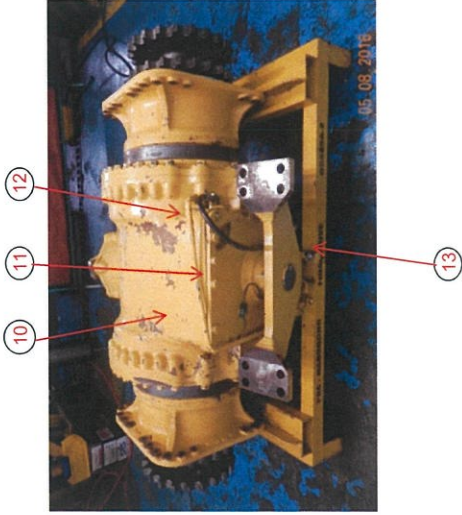
WO NO:

POWER TRAIN SECTION

RECEIVING INSPECTION SHEET DIFF & FD	MACHINE MODEL	GD825A-2	PART NO	235-22-00132	HOUR METER	
	COMP. MODEL	DIFF & FD	COMP. S/N		LIFE TIME	
	RECEIVING DATE		SITE		REVISION NO	0
	HISTORICAL		WO NO		PAGE	

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING
TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOOES		NO.	ITEM	INSPECTION CONDITION	CHECK	
					IN	OUT
<u>Front side</u> 		1	Shaft RH			
		2	Sprocket RH			
		3	Side case RH			
		4	Center case			
		5	Cover			
		6	Coupling			
		7	Side case LH			
		8	Sprocket LH			
		9	Shaft LH			
		10	Case			
		11	Cover			
		12	Tube			
		13	Tube			
<u>Rear side</u> 			Stand			
			Painting			
			Packing			

NOTE PLEASE MARK " " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

Jakarta, 28-11-2018

Inspected & Prepared by

Check by

Approved by

QA.Inspector

QA SPV

GL/SPV Prod

PPC

REV. 00



SERVICES

PT. SAPTAINDRA SEJATI

PLANT REBUILD CENTER

FINAL DRIVE DISASSEMBLY CHECK SHEET

MACHINE MODEL









GD 825-2

WO NO:



POWER TRAIN SECTION

DISASSEMBLY CHECK SHEET		COMP.MODEL	PROJECT NO.	NUMBER.DOC
FINAL DRIVE		COMP. S/N	PROD.NO	PUB.DATE 24/05/2001
GD825-2		UNIT MODEL	PROC.DATE	REV.NO 00
		UNIT S/N	PROC.BY	PAGE 1 of 2

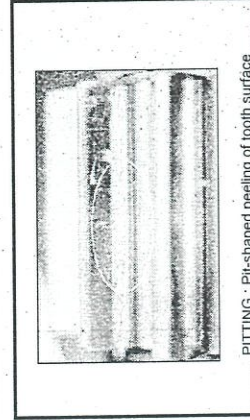
PROCESS		START	DISASSEMBLY BY	
		FINISH		

No		PARTS NAME	METHODE	CHECK POINT	EVALUATION		FIGURE OF PARTS TO BE CHECKED																		
					ACTUAL	U/A	U/R	R/N																	
1	PINION GEAR	VISUAL CHECK	Pitting / Crack / Abnormal wear on seal contact area (<i>used crack detector</i>). <i>max wear : depth $\leq 0,1\text{ mm}$ width $\leq 0,5\text{ mm}$</i> Worn of spline area <i>max wear less than 0,35 mm</i> Measure thickness of shims <i>std thickness = 2 mm</i>	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table> <table><tr><td>Seal contact</td><td>Depth</td></tr><tr><td>Spline worn</td><td>Width</td></tr><tr><td></td><td></td></tr></table> <table><tr><td>Shims thickness</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		Seal contact	Depth	Spline worn	Width			Shims thickness		<table><tr><td></td><td></td></tr></table>				
CONTENTS CHECK	PERCENTAGE																								
Pitting																									
Crack																									
Scoring																									
Seal contact	Depth																								
Spline worn	Width																								
Shims thickness																									
2	HUB	VISUAL CHECK	Crack / Abnormal wear at spline area. (Inspection used Crack detector)	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		<table><tr><td></td><td></td></tr></table>												
CONTENTS CHECK	PERCENTAGE																								
Pitting																									
Crack																									
Scoring																									
3	BULL GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		<table><tr><td></td><td></td></tr></table>												
CONTENTS CHECK	PERCENTAGE																								
Pitting																									
Crack																									
Scoring																									
4	BOSS	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside diameter of bearing seat	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table>														
CONTENTS CHECK	PERCENTAGE																								
Worn																									
Crack																									
5	DRUM	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside spline area of drum. <i>max wear less than 0,35 mm</i> Abnormal wear at floating seal seat area.	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table>														
CONTENTS CHECK	PERCENTAGE																								
Worn																									
Crack																									
6	CARRIER	VISUAL CHECK	Crack / Abnormal wear at spline area, Abnormal wear at hole shaft <i>Max clearance = 0,05 mm</i> (Inspection used Crack detector)	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		<table><tr><td></td><td></td></tr></table>														
CONTENTS CHECK	PERCENTAGE																								
Worn																									
Crack																									
7	GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	<table><tr><td>CONTENTS CHECK</td><td>1</td><td>2</td><td>3</td></tr><tr><td>Pitting</td><td></td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td><td></td></tr><tr><td>Scoring</td><td></td><td></td><td></td></tr></table>	CONTENTS CHECK	1	2	3	Pitting				Crack				Scoring				<table><tr><td></td><td></td></tr></table>				
CONTENTS CHECK	1	2	3																						
Pitting																									
Crack																									
Scoring																									
8	SHAFT	VISUAL CHECK	Crack / Abnormal wear.	<table><tr><td>CONTENTS CHECK</td><td>1</td><td>2</td><td>3</td></tr><tr><td>Wear</td><td></td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td><td></td></tr></table>	CONTENTS CHECK	1	2	3	Wear				Crack				<table><tr><td></td><td></td></tr></table>								
CONTENTS CHECK	1	2	3																						
Wear																									
Crack																									
9	COVER	VISUAL CHECK	Crack, abnormal wear at bearing site. Damage at ring gear seat area. Thread condition	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Worn</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Thread</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Worn		Crack		Thread														
CONTENTS CHECK	PERCENTAGE																								
Worn																									
Crack																									
Thread																									
10	RING GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	<table><tr><td>CONTENTS CHECK</td><td>PERCENTAGE</td></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring														
CONTENTS CHECK	PERCENTAGE																								
Pitting																									
Crack																									
Scoring																									

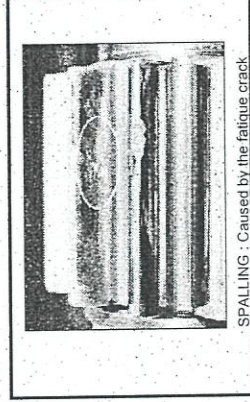
DISASSEMBLY CHECK SHEET		COMP. MODEL		PROJECT NO.		NUMBER.DOC	
FINAL DRIVE		COMP. S/N		PROD.NO		PUB.DATE	
GD825-2		UNIT MODEL		PROC.DATE		REV.NO	
		UNIT S/N		PROC.BY		PAGE	
						05/05/2001	
						00	
						2 of 2	

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION				FIGURE OF PARTS TO BE CHECKED														
				ACTUAL	U/A	U/R	R/N															
11	CASE	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect drain plug installation thread, and over wear at bottom case surface area.	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Worn</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Worn		<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			
CONTENTS CHECK	PERCENTAGE																					
Pitting																						
Crack																						
Worn																						
12	SHAFT	VISUAL CHECK	Alignment of shaft, measure at the lathe machine (Std size less than 0,05 mm)	<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>									
13	BOSS	VISUAL CHECK	Abnormal wear at bearing seat	<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>									
14	SUN GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	<table><tr><th>CONTENTS CHECK</th><th>PERCENTAGE</th></tr><tr><td>Pitting</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scoring</td><td></td></tr></table>	CONTENTS CHECK	PERCENTAGE	Pitting		Crack		Scoring		<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			
CONTENTS CHECK	PERCENTAGE																					
Pitting																						
Crack																						
Scoring																						
15	PLATE	VISUAL CHECK	Crack / Abnormal wear	<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>									
16	SHAFT	VISUAL CHECK	Abnormal wear at bearing seat	<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>			<table><tr><td></td><td></td></tr></table>									

ADDITIONAL SAMPLE OF FAILURE SIGN ABOUT GEAR, RUBBER BUSHING, AND BEARING.



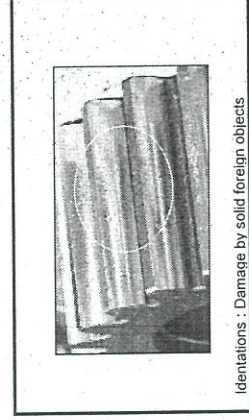
PITTING : Pit-shaped peeling of tooth surface



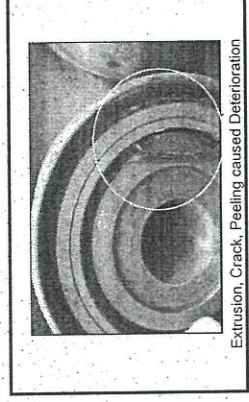
SPALLING : Caused by the fatigue crack



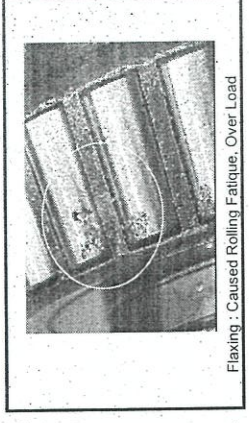
SCORING : Caused by contact between tooth metals



Identations : Damage by solid foreign objects



Extrusion, Crack, Peeling caused Deterioration



Flaxing : Caused Rolling Fatigue, Over Load

NOTE

DISASSEMBLY BY,

APPROVED BY

(MECHANIC)

(SUPERVISOR)

REV. 00



PLANT REBUILD CENTER

FINAL DRIVE VISUAL & MEASUREMENT CHECK SHEET

MACHINE MODEL







GD 825A-2

WO NO:

POWER TRAIN SECTION






VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE GD 825A - 2	WO NUMBER	DOCUMENT NO	RC/QR03/PT/02/06
	COMP.MODEL	PUBLIC DATE	
	COMP.S/N	REVISION NO	
	UNIT CODE	PAGE	1 of 5

PROCESS	START FINISH	INSPECTION BY	

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT				DECISION		
				Contens	Act	Remark		U/A	U/R	R/N
1	Case,center	1. Thread fitting portion 2. Oring contact surface 3. Cage contact surface 4. Shims contact surface All round		Normal						
2	Case,side	1. Bearing fitting portion 2. Shims contact surface 3. Oring groove 4. Bushing contact surface All round		Normal						
3	Cage & cover	1. Bearing fitting portion 2. Seal fitting portion 3. Oring groove 4. Cage contact surface		Normal						
4	Cover Hanger	1. Contact surface 2. Mating face All round		Normal						
5	Cage	1. Bearing fitting portion 2. Mating face All round		Normal						
6	Shaft	1. External spline teeth All round		Normal						



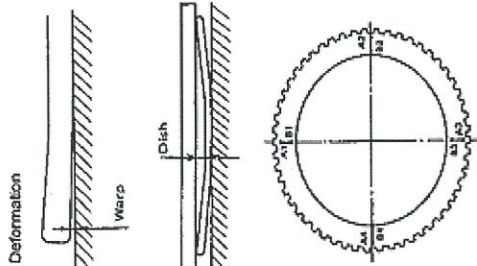


VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE GD 825A - 2	WO NUMBER	DOCUMENT NO	RC/QR03/PT/02/06
	COMP.MODEL	PUBLIC DATE	
	COMP.S/N	REVISION NO	
	UNIT CODE	PAGE	2 of 5

PROCESS	START	INSPECTION BY	
	FINISH		

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT				DECISION							
								U/A	U/R	R/N					
7	Coupling	1. Seal contact surface 2. Internal spline teeth 3. Mating face All round		Contents	Act	Remark									
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											
8	Pinion Gear	1. External gear teeth 2. Bearing fitting portion 3. Thread fitting portion 4. External spline teeth All round		Contents	Pnn	Gear	Remark			Pnn	Gear				
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											
9	Case	1. Bearing fitting portion 2. Spider fitting portion 3. Washer contact surface All round		Contents	Act	Remark									
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											
10	Case	1. Spider fitting portion 2. Plate contact surface All round		Contents	Act	Remark									
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											
11	Gear	1. External gear teeth 2. Whaser contact surface 3. Internal spline teeth All round		Contents	RH	LH	Remark			RH	LH				
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											
12	Pinion	1. External gear teeth 2. Sleeve contact surface All round		Contents	A	B	C	D	Remark			A	B	C	D
				Normal											
				Crack											
				Scratch											
				Broken											
				Abn wear											







VISUAL & MEASUREMENT	WO NUMBER	DOCUMENT NO	RC/QR03/PT/02/06
	COMP.MODEL	PUBLIC DATE	
	COMP.S/N	REVISION NO	
	UNIT CODE	PAGE	3 of 5

[illegible]

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOOES	VISUAL CHECK & MEASUREMENT						DECISION		
				Contens	Siv	Nut	Remark	Siv	Nut	U/A	U/R	R/N
13	Sleeve Nut	1. Pinion contact surface 2. Thread fitting portion All round		Contens	Siv	Nut	Remark	Siv	Nut			
				Normal								
				Crack								
				Scratch								
				Broken								
				Abn wear								
14	Shaft	1. Sleeve contact surface 2. Cage contact surface All round		Contens	Act	Remark						
				Normal								
				Crack								
				Scratch								
				Broken								
				Abn wear								
15	Plate	Disc contact surface External gear teeth PLATE Standard Repair Limit		Contens	Act	Remark						
				Normal								
				Crack								
				Scratch								
				Broken								
				Abn wear								
16	Piston	1. Seal ring groove 2. Plate contact surface All round		Contens	Act	Remark						
				Normal								
				Crack								
				Scratch								
				Broken								
				Abn wear								
17	Case	1. Seal ring groove 2. Seal contact surface All round		Contens	Act	Remark						
				Normal								
				Crack								
				Scratch								
				Broken								
				Abn wear								




VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE GD 825A - 2	WO NUMBER	DOCUMENT NO	RC/QR03/PT/02/06
	COMP.MODEL	PUBLIC DATE	
	COMP.S/N	REVISION NO	
	UNIT CODE	PAGE	4 of 5

PROCESS	START FINISH	INSPECTION BY	

NO	PART NAME	CHECKING POINT	SKEETH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT					DECISION	
				Contens	1	2	3	4	U/A	U/R R/N
18	Sprocket	1. External gear teeth 2. Internal spline teeth All round		Contens Normal Crack Scratch Broken Abn wear Remark					1 2 3 4	
	Plate	1. Shim contact surface 2. Mating face All round		Contens Normal Crack Scratch Broken Abn wear Remark					RH LH	
20	Flange	1. Oring groove 2. Mating face 3. Bushing contact surface		Contens Normal Crack Scratch Broken Abn wear Remark					RH LH	
21	Shaft	1. Bearing contact surface 2. External spline teeth All round		Contens Normal Crack Scratch Broken Abn wear Remark					RH LH	
22	Carrier	1. Pin contact surface 2. Internal spline teeth All round		Contens Normal Crack Scratch Broken Abn wear Remark					RH LH	
23	Pinion	1. External gear teeth 2. Side contact surface 3. Bearing fitting portion All round		Contens Normal Crack Scratch Broken Abn wear Remark					RH LH	

VISUAL & MEASUREMENT CHECK SHEET		WO NUMBER	DOCUMENT NO	RC/QR03/PT/02/06
FINAL DRIVE		COMP.MODEL	PUBLIC DATE	
GD 825A - 2		COMP.S/N	REVISION NO	
		UNIT CODE	PAGE	5 of 5

PROCESS		START FINISH	INSPECTION BY	

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOOES	VISUAL CHECK & MEASUREMENT					DECISION		
				Contens	RH	LH	Remark		U/A	U/R	R/N
24	Sun gear	1. External gear teeth 2. Internal spline teeth All round		Normal					RH		
				Crack					LH		
				Scratch							
				Broken							
				Abn wear							
25	Ring gear	1. Internal gear teeth All round		Normal					RH		
				Crack					LH		
				Scratch							
				Broken							
				Abn wear							
26	Gear	1. External gear teeth All round		Normal					RH		
				Crack					LH		
				Scratch							
				Broken							
				Abn wear							

Note

INSPECTION BY

APPROVED BY

MECHANIC

GL/QA

REV. 00



SERVICES

PT. SAPTAINDRA SEJATI

PLANT REBUILD CENTER

FINAL DRIVE

ASSEMBLY

CHECK SHEET

MACHINE MODEL




GD 825-2

WO NO:

POWER TRAIN SECTION

ASSEMBLY CHECK SHEET			PROJECT NUMBER	DOC.NO.	RC/QR04/PT/02/06
FINAL DRIVE			COMP. MODEL	PUB. DATE	
GD825A-2			COMP. S/N	REV. NO	00
			MACHINE MODEL	PAGE	1 of 5

PROCESS	START	ASSEMBLY BY	
	FINISH		



NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
1	BEVEL GEAR ASSEMBLY	- Torque bolt Act. : kgm - Check that there is no clearance between end face of face and bearing.	- Thread tightener LT-2 - Std torque 28.5 ± 3 kgm				
2	PINION GEAR ASSEMBLY	- Torque ring nut Act. : kgm - Check that it rotates smoothly.	- Thread tightener LT-2 - Std torque 56 ± 6 kgm				
3	PINION CAGE ASSEMBLY	- Torque bolt Act. : kgm	- Thread tightener LT-2 - Std torque 28.5 ± 3 kgm				
		- Check that seal ring with the groove on side taking pressure.	- Coat all parts with E O SAE 30 CD				
		- Torque bolt Act. : kgm	- Thread tightener LT-2 - Std torque 28.5 ± 3 kgm				
4	BEVEL PINION ASSEMBLY	- Check matching numbers of bearing and outer face and keep as a set.					

ASSEMBLY CHECK SHEET

FINAL DRIVE


GD825A-2

PROJECT NUMBER	DOC.NO.	RC/QR04/PT/02/06
COMP. MODEL	PUB. DATE	
COMP. S/N	REV. NO	00
MACHINE MODEL	PAGE	2 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
		- Starting torque Act. : kgm - Torque second nut Act. : kgm	- Std starting torque 1 ~ 1.3 kgm - Thread tightener LT-2 - Std torque 40 ± 10 kgm				
5	CARRIER ASSEMBLY	- Torque bolt Act. : kgm - Check that it rotates smoothly.	- Thread tightener LT-2 - Std torque 11.5 ± 1 kgm				
6	SIDE CASE ASSEMBLY	- Check position washer.	- Washer contact surface LM-P.				
		- Check position bushing.	- Bushing contact surface LM-P.				
		- Shim thickness Act. : mm	- Std shim 1.0 mm				
		- Torque bolt plate Act. : kgm	- Thread tightener LT-2 - Std torque 56± 6 kgm				
		- Torque bolt Act. : kgm - Starting torque of bearing Act. : kgm	- Thread tightener LT-2 - Std torque 94.5 ± 10.5 kgm - Std starting torque 1.0~1.3 kgm				

ASSEMBLY CHECK SHEET
FINAL DRIVE
GD825A-2

PROJECT NUMBER	DOC.NO.	RC/QR04/PT/02/06
COMP. MODEL	PUB. DATE	
COMP. S/N	REV. NO	00
MACHINE MODEL	PAGE	3 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
		- Torque bolt Act. : kgm	- Thread tightener LT-2 - Std torque 28.25 ± 3.25 kgm				
7	CENTER CASE ASSEMBLY	- Torque bolt Act. : kgm	- Thread tightener LT-2 - Std torque 28.25 ± 3.25 kgm				
8	CONNECTIO N OF BEVEL GEAR ASSEMBLY	- Torque bolt Act. : kgm	Thread tightener LT-2 - Std torque 11.5 ± 1 kgm				
		- Torque bolt Act. : kgm	Thread tightener LT-2 - Std torque 11.5 ± 1 kgm				
		- Shim thickness Left.....mm Right.....mm	- Std adjust of shim 2 mm				
		- Starting torque bevel gear S/T.....kgm	- Std S/T 1.0 ~ 1.3 kgm				
9	CONNECTIO N OF BEVEL PINION ASSEMBLY	- Shim thickness.....mm	- Std adjust of shim 2 mm				
		- Back Lash.....mm	- Std Back Lash 0.25 ~ 0.33 mm				
		- Tooth contact.....%	- Std tooth contact > 75 %				

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

ASSEMBLY CHECK SHEET

FINAL DRIVE

GD825A-2

PROJECT NUMBER		DOC.NO.	RC/QR04/PT/02/06
COMP. MODEL		PUB. DATE	
COMP. S/N		REV. NO	00
MACHINE MODEL		PAGE	4 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
10	CONNECTION OF SIDE CASE ASSEMBLY	- Install hole shaft, sun gear, and collar, then fix them with snap ring (L & R).					
		- Install ring gear					
		- Torque bolt Act. :	- Std torque 56 ± 6 kgm				
		- Connect tubes and Torque bolt Act. :	- Std torque 6.7 ± 0.7 kgm				
		- Torque bolt cover Act. :	- Std torque 28.25 ± 3.25 kgm				
		- Torque bolt cover Act. : - Install coupling	- Std torque 28.25 ± 3.25 kgm				
11	FINAL DRIVE CASE PIPING	- Torque bolt tube Act. :	- Std torque 6.7 ± 0.7 kgm				
		- Torque bolt tube Act. :	- Std torque 11.5 ± 1 kgm				
		- Torque bolt cover Act. :	- Std torque 6.7 ± 0.7 kgm				
		- Torque bolt relief valve Act. :	- Std torque 6.7 ± 0.7 kgm				

ASSEMBLY CHECK SHEET				PROJECT NUMBER	DOC.NO.	RC/QR04/PT/02/06
FINAL DRIVE				COMP. MODEL	PUB. DATE	
GD825A-2				COMP. S/N	REV. NO	00
				MACHINE MODEL	PAGE	5 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
		- Torque bolt tube Act. : kgm	- Std torque 6.7± 0.7 kgm				

NOTES

ASSEMBLY BY	INSPECTED BY	APPROVED BY
(MECHANIC)	(QA)	GL/SPV PRODUCTION

REV. 01



PLANT REBUILD CENTER

FINAL DRIVE FINAL DELIVERY CHECK SHEET

MACHINE MODEL

GD 825A-2

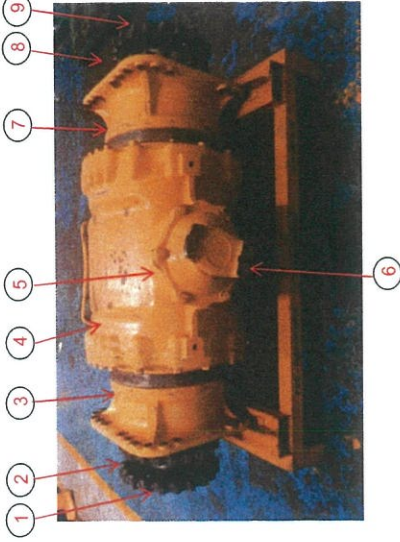
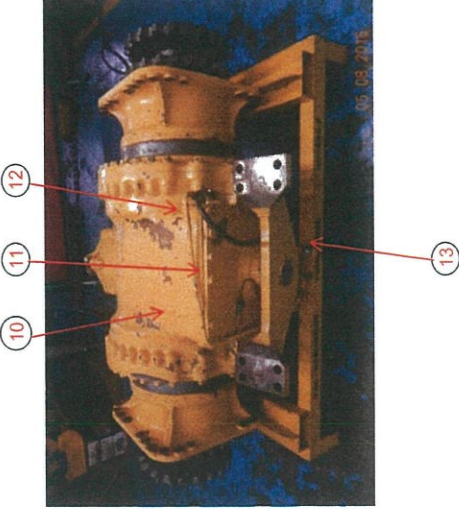
WO NO:

POWERTRAIN SECTION

FINAL DELIVERY				PART NO		235-22-00132		HOUR METER	
INSPECTION SHEET				DIFF & FINAL DRIVE		COMP S/N		LIFE TIME	
DIFF & FINAL DRIVE				RECEIVING DATE		SITE		REVISION NO	
				HISTORYCAL		WO NO		PAGE	
								0	

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES		NO.	ITEM	INSPECTION CONDITION	CHECK	
					IN	OUT
Front side 	1	Shaft RH				
	2	Sprocket RH				
	3	Side case RH				
	4	Center case				
	5	Cover				
	6	Coupling				
	7	Side case LH				
	8	Sprocket LH				
	9	Shaft LH				
	10	Case				
	11	Cover				
	12	Tube				
	13	Tube				
Rear side 		Stand				
		Painting				
		Packing				
		Name Plate				

NOTE PLEASE MARK " " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

Inspected & Prepared by

Check by

Approved by

QA.Inspector

QA SPV

GI/SPV Prod

PPC