

REV. 00



PLANT REBUILD CENTER

TRANSMISSION RECEIVING INSPECTION CHECK SHEET

MACHINE MODEL

GD 825-2

WO NO:

POWER TRAIN SECTION

RECEIVING INSPECTION SHEET TRANSMISSION	MACHINE MODEL	GD825-2	REPORT NO.		DOCUMENT NO.	
	COMP. MODEL		COMP. S/N		PUBL. DATE	:
	RECEIVING DATE		INSP. DATE		REVISION NO.	00
	DELIVERY DATE		WO NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

[illegible]

Jakarta,

Inspected by,

Aproved by,

REV. 00



PLANT REBUILD CENTER

TRANSFER & TRANSMISSION ASSEMBLY CHECK SHEET

MACHINE MODEL




GD 825-2

WO NO:

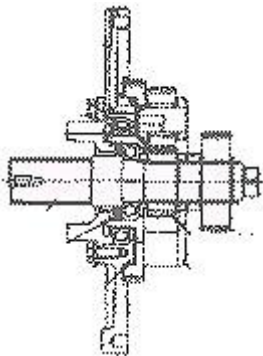

POWER TRAIN SECTION

ASSEMBLY CHECK SHEET TRANSFER & TRANSMISSION GD825-2	PART NUMBER		DOC.NO.	RC/QR04/PT/03/01
	PART NAME		PUB. DATE	
	CODE UNIT		REV. NO	00
	MACHINE MODEL		PAGE	1 of 5




PROCESS	START		ASSEMBLY BY	
	FINISH			

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
A 1	TRANSFER ASSEMBLY	- Check Spacer					 
	OUTPUT SHAFT ASSEMBLY	- Torque Bolt Act. : Kgm - Oil Seal - Torque Bolt Act. : Kgm	- If there is a gap between spacer and bearing, knock in bearing. - STD Torque 11.5 ± 1 kgm - Lip of oil seal G2-LI - STD Torque 11.5 ± 1 kgm				
2	COUPLING ASSEMBLY	- Torque Bolt Act. : Kgm	- STD Torque 28.5 ± 3 kgm - LT-2				
		- Tighten Mounting Bolt Holder Act. : Kgm	- STD Torque 94.5 ± 10.5 kgm - LT-2				
3	GEAR, INPUT SHAFT CAGE	- Careful install gear.	- Confirm installation direction of gear.				
4	SPEEDOMETER DRIVE GEAR	- Tighten Mounting Bolt Act. : Kgm	- STD Torque 94.5 ± 10.5 kgm - LT-2				



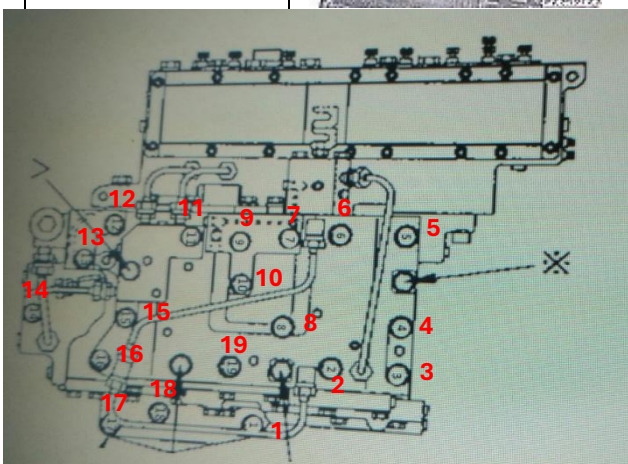
ASSEMBLY CHECK SHEET TRANSFER & TRANSMISSION GD825-2	PART NUMBER		DOC.NO.	RC/QR04/PT/03/01
	PART NAME		PUB. DATE	
	CODE UNIT		REV. NO	00
	MACHINE MODEL		PAGE	2 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN			FIGURE OF PARTS TO BE CHECKED
				MEC	SPV	QA	
B 1	TRANSMISSION ASSEMBLY CAGE & REVERSE ASSEMBLY	Torque Bolt cage Act.: kgm	- Std. Torque 11.5 ± 1 kgm - Coat sliding portion of each Part with engine oil.				
2	1st SPEED & 2nd SPEED OF CARRIER ASSEMBLY	Torque Bolt cage Act.: kgm	- Std. Torque 6.7 ± 0.7 kgm - Thread Tightener with LT2				
3	HIGH ROTATING CLUTCH ASSEMBLY	Align the punch mark when install cage.					
		Torque Bolt cage Act.: kgm	- Std. Torque 6.7 ± 0.7 kgm - Thread Tightener with LT2.				
		Torque Bolt shaft Act.: kgm	- Std. Torque 11.5 ± 1 kgm - Thread Tightener with LT2.				


ASSEMBLY CHECK SHEET TRANSFER & TRANSMISSION GD825-2	PART NUMBER		DOC.NO.	RC/QR04/PT/03/01
	PART NAME		PUB. DATE	
	CODE UNIT		REV. NO	00
	MACHINE MODEL		PAGE	3 of 5

NO	PARTS	CHECK POINT	SPECIFICATION	CHECK	FIGURE OF PARTS TO BE CHECKED
4	TRANSMISSION ASSEMBLY	- Seal Ring	- Assemble with seal ring groove facing the housing side & install without twisting		
5	NO.5 HOUSING LOW SPEED PISTON	- Guide Pin	- Length of Guide Pin : 276 mm		
6	1st & 2nd SPEED CARRIER ASSEMBLY	- Sun Gear	- Sun Gear & Ring Gear are correctly install.		
7	BEARING HOLDER	- Torque Bolt Holder Act.: kgm	- Std. Torque 6.7 ± 0.7 kgm - Thread Tightener with LT2.		
8	REVERSE RING GEAR & SNAP RING TIE BOLT	- Torque Tie Bolt Act.: kgm	- Std. Torque 17 ± 1 kgm		

ASSEMBLY CHECK SHEET TRANSFER & TRANSMISSION GD825-2	PART NUMBER		DOC.NO.	RC/QR04/PT/03/01
	PART NAME		PUB. DATE	
	CODE UNIT		REV. NO	00
	MACHINE MODEL		PAGE	4 of 5

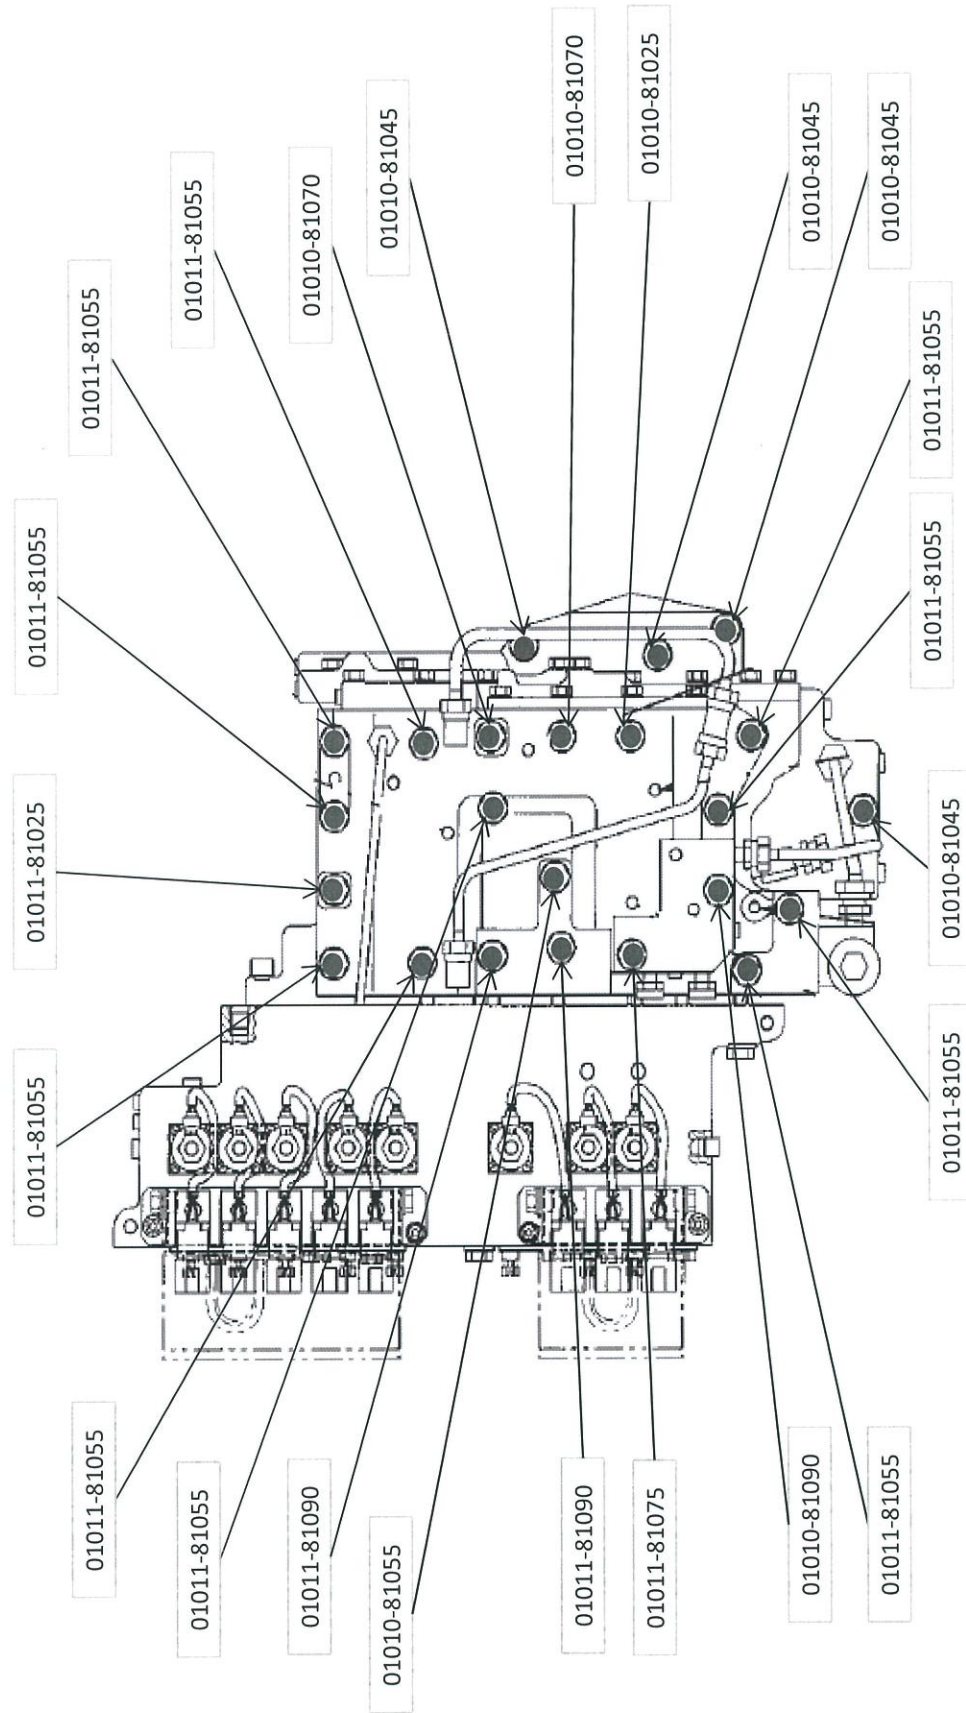
NO	PARTS	CHECK POINT	SPECIFICATION		CHECK	FIGURE OF PARTS TO BE CHECKED																				
9	PISTON FUNCTION	Measuring piston stroke	<table><tr><th>Piston</th><th>Act.</th></tr><tr><td>R</td><td></td></tr><tr><td>F</td><td></td></tr><tr><td>4th</td><td></td></tr><tr><td>3rd</td><td></td></tr><tr><td>2nd</td><td></td></tr><tr><td>1st</td><td></td></tr></table>	Piston	Act.	R		F		4 th		3 rd		2 nd		1 st		<table><tr><th>Std.</th></tr><tr><td>4.0 mm</td></tr><tr><td>5.0 mm</td></tr><tr><td>3.0 mm</td></tr><tr><td>3.5 mm</td></tr><tr><td>3.0 mm</td></tr><tr><td>4.5 mm</td></tr></table>	Std.	4.0 mm	5.0 mm	3.0 mm	3.5 mm	3.0 mm	4.5 mm	
Piston	Act.																									
R																										
F																										
4 th																										
3 rd																										
2 nd																										
1 st																										
Std.																										
4.0 mm																										
5.0 mm																										
3.0 mm																										
3.5 mm																										
3.0 mm																										
4.5 mm																										
10	SLEEVE ASSEMBLY	Measuring protution surface sleeve with surface case transmission. (Make Shim if value not standart) <table><tr><th>Sleeve</th><th>Act</th></tr><tr><td>1</td><td></td></tr><tr><td>2</td><td></td></tr><tr><td>3</td><td></td></tr><tr><td>4</td><td></td></tr><tr><td>5</td><td></td></tr><tr><td>6</td><td></td></tr></table>	Sleeve	Act	1		2		3		4		5		6		- Std. protution 0.0 ±0.05 mm		 							
Sleeve	Act																									
1																										
2																										
3																										
4																										
5																										
6																										
11	CONTROL VALVE	- Torque Bolt Mounting Step 1 st <table><tr><td>Act.:</td><td>kgm</td></tr></table> Step 2 nd <table><tr><td>Act.:</td><td>kgm</td></tr></table> Step 3 rd <table><tr><td>Act.:</td><td>kgm</td></tr></table>	Act.:	kgm	Act.:	kgm	Act.:	kgm	- Std. Torque 2.0 kgm - Std. Torque 4.0 kgm - Std. Torque 5.0 kgm		 															
Act.:	kgm																									
Act.:	kgm																									
Act.:	kgm																									

ASSEMBLY CHECK SHEET TRANSFER & TRANSMISSION GD825-2	PART NUMBER		DOC.NO.	RC/QR04/PT/03/01
	PART NAME		PUB. DATE	
	CODE UNIT		REV. NO	00
	MACHINE MODEL		PAGE	5 of 5

12	CAGE	- Torque Bolt Mounting Act.: kgm	- Std. Torque 11.5 ± 1 kgm		
----	------	---	-----------------------------------	--	---

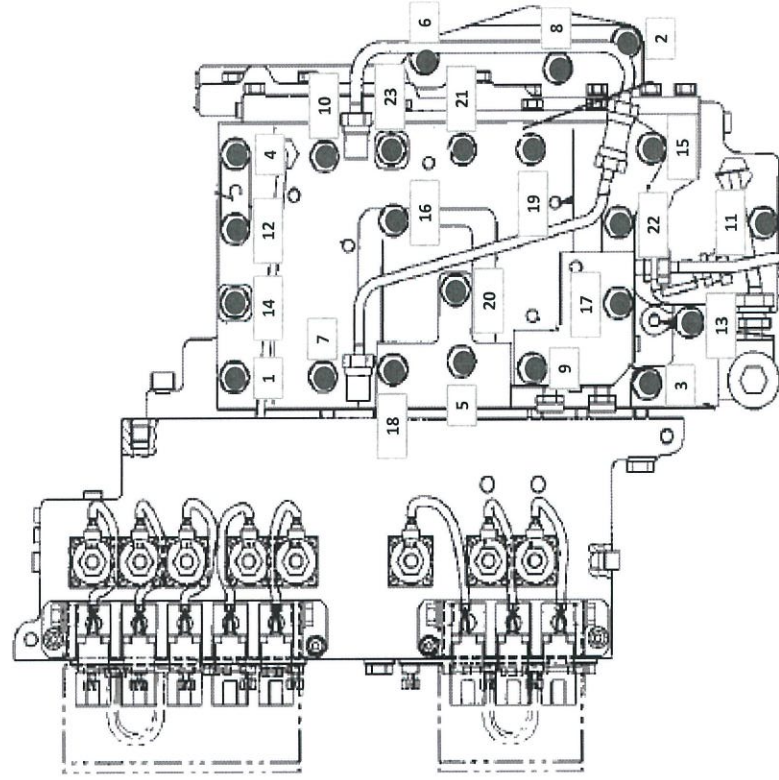
NOTES

ASSEMBLY BY	INSPECTED BY	APPROVED BY
_____	_____	_____
(MECHANIC)	(QA)	(SUPERVISOR)



QUALITY ASSURANCE

STANDARDIZATION SEQUENCE OF TORQUE BOLT CONTROL VALVE TRANSMISSION GD825A-2 S/N 12019 AND UP



STD TORQUE OF BOLT

6.7 - ± 0.7 kgm

REV. 00



PLANT REBUILD CENTER

CONTROL VALVE DISASSEMBLY CHECK SHEET

MACHINE MODEL

GD 825A-2

WO NO:

POWER TRAIN SECTION

DISASSEMBLY CHECK SHEET CONTROL VALVE GD 825A - 2	WO NUMBER		DOCUMENT NO	RC/QR02/PT/11/10
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT MODEL		PAGE	1 of 3

PROCESS	START		DISASSEMBLY BY	
	FINISH			

NO	PART TO REMOVE OR INSPECT	CONDITIONS TO BE INSPECTION	MECH	GL	SKETCH DRAWING OR PHOTOES	REMARK
1	Cooler bypass valve & Priority valve	⚠ IMPORTANT ⚠ Check the quantity and thickness of the shims check the chipping ,scrath or banding of the spoll valve check the crack and abnormal worn of the valve body check the tension and banding of the spring - Remove covers (2) and (3) from body (1). - Remove spring (4), then remove guide (5), shim (6), valve (7), and piston (8). - Remove spring (9) and guide (10), then remove shim (11), valve (12), valve (13), spring (14),and valve (15).				
2	Modulation valve & Quick return valve	- Remove valve (16), spring (17), shim (18), and spring (19). - Remove valve (20), then remove valve (21), spring (22), valve (23), and shim (24). - Remove stopper (25). - Remove valve (26), then remove plug (27)				
3	Inching valve & Spacer	- Remove locknut (28) and yoke (29). - Remove cover (30), then remove seal (31). - Remove cover (32). - Remove spool (33). - Remove stopper (34), spring (35), shim (36), stopper (37), spring (38), and shim (39). - Remove valve (40), then remove valve (41), spring (42), valve (43), sleeve (44), spring (45), and valve (46). - Remove plug (47), then remove spacer (48)				
4	valve for L, H, 4,3,2,1 & F, R clutch	- Remove cover (50) from body (49). - Remove spring (51) and stopper (52), then remove valve (53). - Remove spring (54). and stopper (55), then remove valve (56). - Remove spring (57), then remove collar (58) and valve (59). - Remove spring (60), then remove collar (61) and valve (62)				
5	Pilot reducing pressure valve	- Remove valve (63), then remove shim (64) - Remove spring (65) and shim (66), then remove valve (67), valve (68), spring (69), and valve (70). - Remove spacer (71)				

NOTE

INSPECTION BY

MECHANIC

APPROVE BY

GROUP LEADER (GL)

REV. 00



PLANT REBUILD CENTER

CONTROL VALVE MEASUREMENT CHECK SHEET

MACHINE MODEL

GD 825A-2

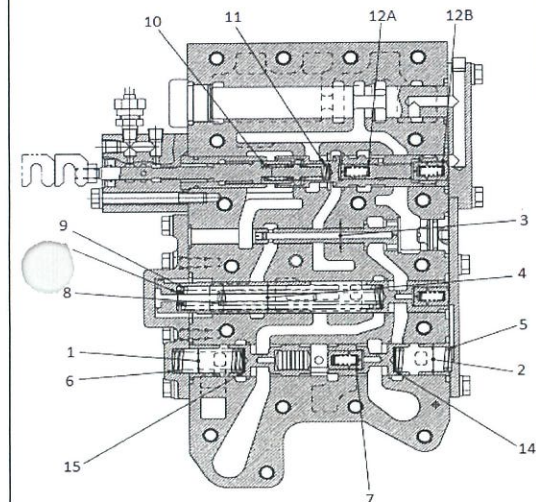
WO NO:

POWER TRAIN SECTION

MEASUREMENT CHECK SHEET CONTROL VALVE GD 825A - 2		WO NUMBER		DOCUMENT NO	RC/QR03/PT/11/09
		COMP.MODEL		PUBLIC DATE	
		COMP.S/N		REVISION NO	
		UNIT MODEL		PAGE	2 of 3
PROCESS	START		MEASUREMENT BY		
	FINISH				

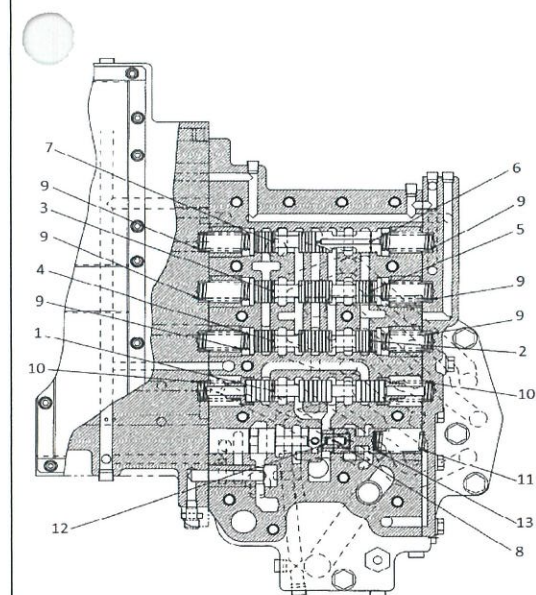
STANDARD VALUE TABLE

Unit: mm



No.	Check item	Criteria					Actual	
1	Clearance between cooler bypass valve spool and body	Standard size 25	Tolerance		Standard clearance 0.020 – 0.054	Clearance limit 0.08		
			Shaft –0.020 –0.041	Hole +0.013 0				
2	Clearance between priority valve spool and body	25	–0.020 –0.041	+0.013 0	0.020 – 0.054	0.08		
3	Clearance between quick return valve spool and body	12	–0.035 –0.045	+0.011 0	0.035 – 0.056	0.08		
4	Clearance between modulating valve spool and body	25	–0.035 –0.045	+0.013 0	0.035 – 0.058	0.08		
5	Priority valve spring	Standard size			Repair limit			
		Free length	Installation length	Installation load	Free length	Installation load		
		62	39.8	198.1 N (20.2 kg)	60.1	188.3 N (19.2 kg)		
6	Cooler bypass valve spring	62	50	88.3 N (9 kg)	60.1	84.3 N (8.6 kg)		
7	Cooler bypass valve spring (inner)	26	19	5.7 N (0.58 kg)	25.2	5.4 N (0.55 kg)		
8	Modulating valve spring (inner)	118	106.6	218.7 N (22.3 kg)	114.4	207.9 N (21.2 kg)		
9	Modulating valve spring (outer)	145.66	111.2	257 N (26.2 kg)	141.3	244.2 N (24.9 kg)		
10	Inching valve spring (Serial No.: 11001 – 12098)	24.5	15.9	23.2 N (2.37 kg)	23.8	22.6 N (2.3 kg)		
	Inching valve spring (Serial No.: 12099 and up)	17.6	12.8	27.9 N (2.85 kg)	17.1	26.5 N (2.71 kg)		
11	Inching valve spring (Serial No.: 11001 – 12098)	31.3	22.1	99.1 N (10.1 kg)	30.4	94.1 N (9.6 kg)		
	Inching valve spring (Serial No.: 12099 and up)	39.4	26.7	98.1 N (10 kg)	38.2	93.2 N (9.5 kg)		
12A 12B	Inching valve spring	26.0	18.0	6.5 N (0.664 kg)	25.2	6.2 N (0.63 kg)		
13	Thickness of modulating valve shim	Set pressure	5 mm (Pressure per each shim: 0.054 MPa (0.55 kg/cm ²))					
		Initial pressure	5 mm (Pressure per each shim: 0.021 MPa (0.21 kg/cm ²))					
14	Thickness of priority valve	2 mm (Pressure per each shim: 0.03 MPa (0.26 kg/cm ²))						
15	Thickness of cooler bypass valve	2 mm (Pressure per each shim: 0.02 MPa (0.21 kg/cm ²))						

Unit: mm



No.	Check item	Criteria					Actual
		Standard size	Tolerance		Standard clearance	Clearance limit	
1	Clearance between F-R spool and body	22	Shaft -0.035 -0.045	Hole +0.013 0	0.035 - 0.058	0.08	
2	Clearance between 1st spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
3	Clearance between 2nd spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
4	Clearance between 3rd spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
5	Clearance between 4th spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
6	Clearance between L spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
7	Clearance between H spool and body	22	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
8	Clearance between pilot reducing valve spool and body	25	-0.035 -0.045	+0.013 0	0.035 - 0.058	0.08	
9	Spring for L, H, 1st, 2nd, 3rd, 4th speed	Standard size			Repair limit		
		Free length	Installation length	Installation load	Free length	Installation load	
		78	47	103 N (10.5 kg)	75.7	98.1 N (10 kg)	
10	Spring for F-R spool	60.6	39	104 N (10.6 kg)		99 N (10.1 kg)	
11	Pilot reducing valve spring (outer)	62	43.7	163.8 N (16.7 kg)	60.1	155.9 N (15.9 kg)	
12	Pilot reducing valve spring (inner)	26	19	5.7 N (0.58 kg)	25.2	5.4 N (0.55 kg)	

MEASUREMENT CHECK SHEET CONTROL VALVE GD 825A - 2		WO NUMBER		DOCUMENT NO	RC/QR03/PT/11/09
		COMP.MODEL		PUBLIC DATE	
		COMP.S/N		REVISION NO	
		UNIT MODEL		PAGE	3 of 3
PROCESS	START		MEASUREMENT BY		
	FINISH				

STANDARD VALUE TABLE

[illegible]

REV. 00



PLANT REBUILD CENTER

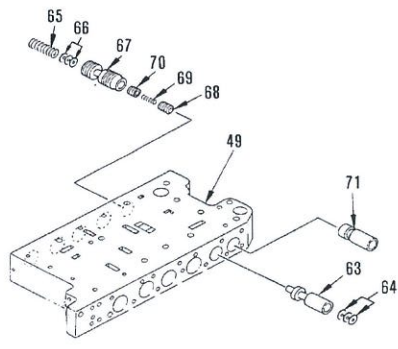
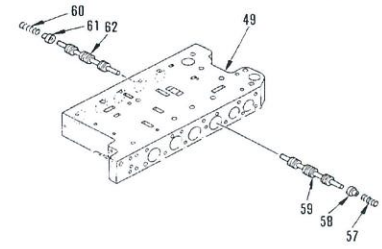
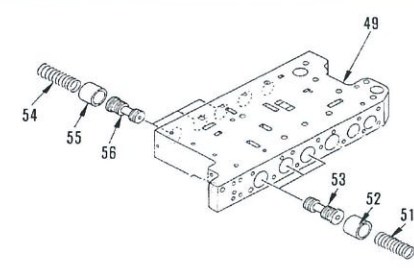
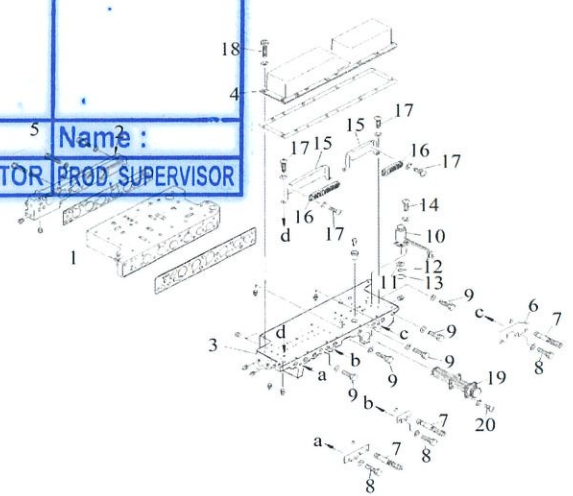
CONTROL VALVE ASSEMBLY CHECK SHEET

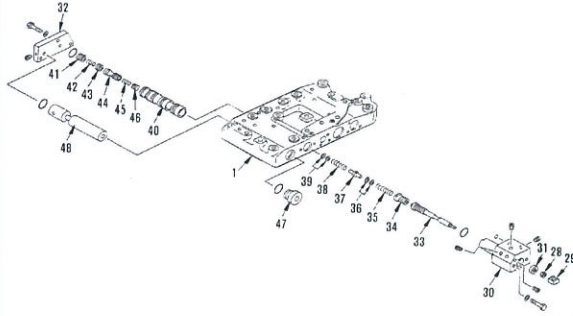

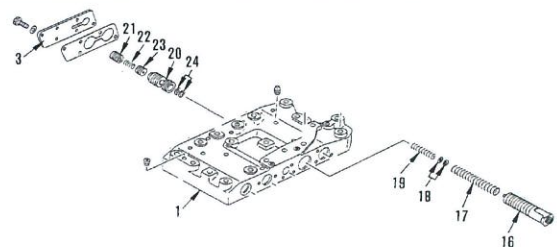
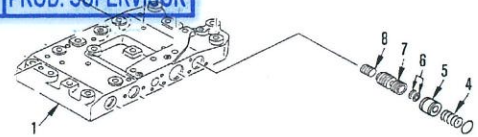
MACHINE MODEL

GD 825-2

WO NO:

POWER TRAIN SECTION

ASSEMBLY CHECK SHEET		WO NUMBER	DOCUMENT NO																														
CONTROL VALVE		COMP.MODEL	PUBLIC DATE																														
GD 825A - 2		COMP.S/N	REVISION NO																														
		UNIT MODEL	PAGE																														
PROCESS	START FINISH	ASSEMBLY BY																															
NO	PART TO INSTALL OR ASSEMBLY	CONDITION TOBE INSTALL	MECH GL/QA SKETCH DRAWING OR PHOTHOES																														
1	PILOT REDUCING PRESSURE VALVE	IMPORTANT Inspect each part thoroughly and confirm that the part is free from dirt/dust, scratches. Be certain to reassemble all spools and plungers into their original valve body bores.  Engine oil SAE 30 Install spacer (71) to body (49) Assemble valve (70) spring (69) and valve (68) to alve (67) then assemble shim (66) and spring (65) to opposite side and install to body <table border="1"> <tr> <th>Standard shim</th> <th>Actual</th> </tr> <tr> <td>3 mm</td> <td></td> </tr> </table> Assemble shim (64) to valve (63) and install to body	Standard shim	Actual	3 mm																												
Standard shim	Actual																																
3 mm																																	
2	VALVE F AND R CLUTCH	Assemble valve (59) to body, and install collar (58) and spring (57) Assemble valve (62) to body and install collar (61) and spring (60)																															
3	VALVE L,H,4,3,2,1 CLUTCH	Assemble valve (56) to body and install stoper (55) and spring (54) Assemble valve (53) to body and install stopper (52) and spring (51) Install cover (50) to body (49)																															
4	SOLENOID AND COVER	Install seat solenoid (3) to body valve (1)  Tightening bolt (9) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>6.75 ± 0.75 kgm</td> <td></td> </tr> </table> Install cover (2) to body valve (1) install screen (11) O-ring (12) (13)  Tightening bolt (5) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>6.75 ± 0.75 kgm</td> <td></td> </tr> </table> Install solenoid (10) to seat (3)  Tightening nut solenoid <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>1.25 ± 0.25 kgm</td> <td></td> </tr> </table>  Tightening screw (14) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>0.155 ± 0.015 kgm</td> <td></td> </tr> </table> Install valve (7) to seat (3) and install plate (6)  Tightening bolt (8) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>2.5 ± 1.5 kgm</td> <td></td> </tr> </table>  Tightening bolt (18) <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>1.5 ± 0.5 kgm</td> <td></td> </tr> </table>	Standard	Actual	6.75 ± 0.75 kgm		Standard	Actual	6.75 ± 0.75 kgm		Standard	Actual	1.25 ± 0.25 kgm		Standard	Actual	0.155 ± 0.015 kgm		Standard	Actual	2.5 ± 1.5 kgm		Standard	Actual	1.5 ± 0.5 kgm		RANDOM ITEM CHECK <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; height: 40px;"></td> <td style="width: 50%; height: 40px;"></td> </tr> <tr> <td style="background-color: #007bff; color: white;">Name :</td> <td style="background-color: #007bff; color: white;">Name :</td> </tr> <tr> <td style="background-color: #007bff; color: white;">QA INSPECTOR</td> <td style="background-color: #007bff; color: white;">PROD SUPERVISOR</td> </tr> </table> 			Name :	Name :	QA INSPECTOR	PROD SUPERVISOR
Standard	Actual																																
6.75 ± 0.75 kgm																																	
Standard	Actual																																
6.75 ± 0.75 kgm																																	
Standard	Actual																																
1.25 ± 0.25 kgm																																	
Standard	Actual																																
0.155 ± 0.015 kgm																																	
Standard	Actual																																
2.5 ± 1.5 kgm																																	
Standard	Actual																																
1.5 ± 0.5 kgm																																	
Name :	Name :																																
QA INSPECTOR	PROD SUPERVISOR																																

ASSEMBLY CHECK SHEET		WO NUMBER	DOCUMENT NO	RC/QR04/PT/13/08																			
CONTROL VALVE		COMP.MODEL	PUBLIC DATE																				
GD 825A - 2		COMP.S/N	REVISION NO																				
		UNIT MODEL	PAGE																				
PROCESS		START	ASSEMBLY BY																				
		FINISH																					
NO	PART TO INSTALL OR ASSEMBLY	CONDITION TOBE INSTALL	MECH	GL/QA	SKETCH DRAWING OR PHOTHOES																		
5	INCHING VALVE	⚠ IMPORTANT ⚠ Inspect each part thoroughly and confirm that the part is free from dirt/dust, scratches. Be certain to reassemble all spools and plungers into their original valve body bores.  Engine oil SAE 30 Fit O-ring to body (1) and assemble spacer (48) then fit O-ring to plug (47) and install Install valve (46) spring (45) sleeve (44) valve (43) spring (42) and valve (41) to valve (40) then assemble shims (39) to opposite side and install to body Assembly stoper (34) spring (35) shim (36) stopper (37) and spring (38) to spool (33) then assembly to body Assembly seal (31) to cover (30) then fit O-ring and assemble in spool (33) Assemble locknut (28) to spool (33) and install yoke (29) Fit O-ring and Install cover (32)  Tightening bolt <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>6.75 ± 0.75 kgm</td> <td></td> </tr> </table>	Standard	Actual	6.75 ± 0.75 kgm																		
Standard	Actual																						
6.75 ± 0.75 kgm																							
6	QUICK RETURN VALVE	Install plug (27) to valve (26) Fit O-ring to stopper (25) and install to body																					
	MODULATING VALVE	Assemble shim (18) and spring (17) and (19) to valve (16) then assemble in body <table border="1"> <tr> <th>Standard shim</th> <th>Actual</th> </tr> <tr> <td>5 mm</td> <td></td> </tr> </table> Assemble valve (23) spring (22) and valve (21) to valve (20) then assemble shim (24) to opposite side and install to body <table border="1"> <tr> <th>Standard shim</th> <th>Actual</th> </tr> <tr> <td>2 mm</td> <td></td> </tr> </table>	Standard shim	Actual	5 mm		Standard shim	Actual	2 mm														
Standard shim	Actual																						
5 mm																							
Standard shim	Actual																						
2 mm																							
8	PRIORITY AND COOLER BYPASS VALVE	Assemble valve (13) spring (14) and valve (15) to valve (12) Assemble shim (11) and spring (9) to valve (12) then install guide (10) <table border="1"> <tr> <th>Standard shim</th> <th>Actual</th> </tr> <tr> <td>2 mm</td> <td></td> </tr> </table> Assemble piston (8) shim (6) and spring (4) to valve (7) then assemble in body <table border="1"> <tr> <th>Standard shim</th> <th>Actual</th> </tr> <tr> <td>2 mm</td> <td></td> </tr> </table> install guide (5)  Tightening bolt <table border="1"> <tr> <th>Standard</th> <th>Actual</th> </tr> <tr> <td>6.75 ± 0.75 kgm</td> <td></td> </tr> </table>	Standard shim	Actual	2 mm		Standard shim	Actual	2 mm		Standard	Actual	6.75 ± 0.75 kgm				RANDOM ITEM CHECK <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 10px;">  </td> <td style="text-align: center; padding: 10px;">  </td> </tr> <tr> <td style="text-align: center;">Name: _____</td> <td style="text-align: center;">Name: _____</td> </tr> <tr> <td style="text-align: center;">QA INSPECTOR</td> <td style="text-align: center;">PROD. SUPERVISOR</td> </tr> </table> 			Name: _____	Name: _____	QA INSPECTOR	PROD. SUPERVISOR
Standard shim	Actual																						
2 mm																							
Standard shim	Actual																						
2 mm																							
Standard	Actual																						
6.75 ± 0.75 kgm																							
																							
Name: _____	Name: _____																						
QA INSPECTOR	PROD. SUPERVISOR																						

[illegible]

CHECKSHEET TESTBENCH TRANSMISSION GD825A-2

DOCUMENT NO	
PUBLICATION	
REVISION	
PAGE	

MACHINE	MODEL		TEST DATE	
	S/N		TEST BY	
T.CONVERTER	MODEL		USED OIL	SAE 30
	S/N		OIL TEMP	50° ± 5° C
TRANSMISSION	MODEL		FLOW RATE (Std)	± 150 £/MENIT
	S/N		FLOW RATE (Act)	
WO.NO			RPM(Std)	600 RPM
			RPM(Act)	

DESCRIPTION	STANDARD (kg/cm2)	ACTUAL	REMARK
MAIN PRESSURE	31 - 34		
PILOT PRESSURE	14 ± 1		
LUBRICATION PRESSURE	1.0 - 2.5		

LEVER POSITION	F	R	1st	2nd	3rd	4th	HI	LOW	REMARK
MAIN PRESSURE									
FILLING TIME									

SPEED	F1	F2	F3	F4	F5	F6	F7	F8	REMARK
STD	71,7	96,5	141,4	203	280,8	378,8	554,5	795,8	
ACT									
SPEED	R1	R2	R3	R4	R5	R6	R7	R8	REMARK
STD	76,3	102,9	150,7	216,3	299,1	403,5	591,1	848,7	
ACT									

REMARK :

OIL LEAKAGE	EXCESSIVE HEAT	BREAKAGE / CRACK	ABNORMAL NOISE
☐	☐	☐	☐
YES	NO	YES	NO

NOTE :

TEST BY	APPROVED BY
MEKANIK	QA / GL

REV. 00



PLANT REBUILD CENTER

TRANSMISSION DELIVERY INSPECTION CHECK SHEET

MACHINE MODEL

GD 825-2

WO NO:

POWER TRAIN SECTION

DELIVERY INSPECTION CHECK SHEET TRANSMISSION	MACHINE MODEL	TM GD825A-2	INSP. DATE		DOCUMENT NO.	RC/QR01/PT/03/01
	COMP. MODEL	TRANSMISSION	PART ASSY NO.		PUBL. DATE	
	DELIVERY DATE		COMP. S/N		REVISION NO.	01
	CUSTOMER NAME		JOB NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

[illegible]

Jakarta

Inspected by,

Approved by,