



PT SAPTAINDRA SEJATI

**POWER TAKE OFF
RECEIVING INSPECTION
CHECKSHEET**

MACHINE MODEL

PC1250SP-8

RO NO :

POWERTRAIN SECTION



PT. SAPTA INDRA SEJATI
PLANT REBUILD CENTER

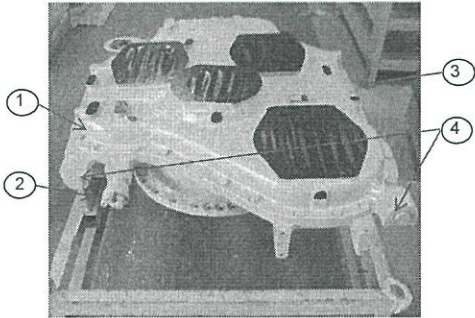
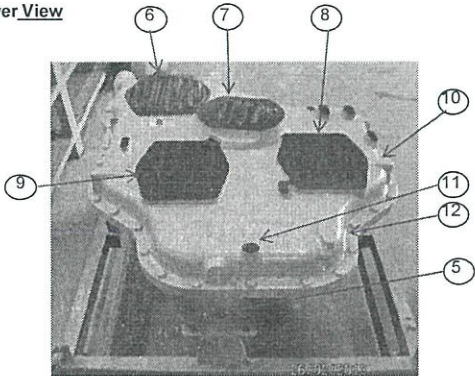
RECEIVING INSPECTION SHEET PTO ASSY	MACHINE MODEL	PC 1250-8	PART ASSY NO.	21N-38-00080	CUS'r NAME	
	COMP. MODEL	PTO	COMP. S/N		PUBL. DATE	25/02/2013
	RECEIVING DATE		FINAL INSPEC		REVISION NO.	01
	DELIVERY DATE		WO NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING
TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO.	ITEM	INSPECTION CONDITION	CHECK	
				IN	OUT
<u>Upper View</u> 	1	Front Case			
	2	Breather			
	3	Oil dipstick			
	4	Plug			
	5	Valve assy			
	6	Center of HVP Shaft			
	7	Center of Shaft			
	8	Center of HVP Shaft			
	9	Center of HVP Shaft			
	10	Bolt monting case			
	11	Elbow			
	12	Rear case			
<u>Lower View</u> 		Packing			
		Stand			
		Painting			
NOTE : PLEASE MARK " " FOLLOWING TO THE ACTUAL CONDITION					
OIL LEVEL	EMPTY OR DRAINED	✓			
	PROPER LEVEL				

Jakarta,

2013

Inspected by

Approved by

QA Inspector

SPV / GL



PT SAPTAINDRA SEJATI

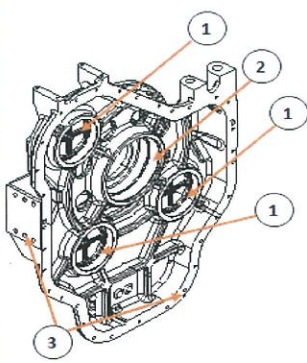
**PTO VISUAL
& MEASUREMENT
CHECKSHEET
MACHINE MODEL**

PC1250SP-8

RO NO :


POWERTRAIN SECTION

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT	DECISION														
					U/A	U/R	R/N												
1	Case 21N-38-51110	Bearing fitting portion		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> Remark	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Braring fitting portion (1)		
		Contens			Act														
		Normal																	
		Crack																	
		Scratch																	
Broken																			
Abn wear																			
			</																

VISUAL & MEASUREMENT CHECK SHEET PTO PC 1250SP - 8	WO NUMBER		DOCUMENT NO	
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	2 of 2

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKEETH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT	DECISION																
					U/A	U/R	R/N														
5	Gear 21N-38-51210	Bearing fitting portion External gear teeth Max wear 0.35 mm Internal spline teeth Max wear 0.2 mm All round		<table><tr><th>Contens</th><th>Act</th><th rowspan="6">Remark</th></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Remark	Normal		Crack		Scratch		Broken		Abn wear		<table><tr><td></td><td></td><td></td></tr></table>			
Contens	Act	Remark																			
Normal																					
Crack																					
Scratch																					
Broken																					
Abn wear																					

Note

INSPECTION BY

MECHANIC

APPROVED BY

GL / QA



PT SAPTAINDRA SEJATI

PTO

ASSEMBLY

CHECKSHEET

MACHINE MODEL

PC1250SP-8

RO NO :








POWERTRAIN SECTION



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET PTO ASSY PC1250-8	UNIT MODEL	PC1250-8	DOCUMENT NO.	
	COMP. MODEL	PTO ASSY	PUBLIC DATE	21/03/2013
	COMP. S/N		REVISION NO.	00 of 1
	WO.NO		PAGE	

PROCESS	START		ASSEMBLY BY	
	FINISH			

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
1	ASSEMBLY PTO ASSY	- Install bearing to Rear cover - Install Gear to bearing - After install gear, install snapping	Press fit coat the rolling surface with grease bearing : lubrication oil				  
		- Install bearing to Gear for no.1,2,3 Pump drive	Press fit bearing to gear				
		- Install bearing to Gear for no.1 Pump drive	Press fit bearing to gear				
		- Install Nipple to cover	Coat the mating surface with gasket sealant (LG-1)				 
		- Install Front cover to Rear cover set guide mounting bolt then align - mounting bolt Act. : kgm - Press center gear	std torque 10 - 12.5 kgm				 
		- Measure protrusion of gear Act. : mm - Check surface between on the gear - Install Tube oil dipstick - Install Brather assy	std 4.80 - 5.00 mm std same with 2 gear				  

REMARK :

ASSEMBLY BY

CHECK BY

APPROVED BY

(MECHANIC)

(QA)

(GL / SPV)