



PT SAPTAINDRA SEJATI

**FINAL DRIVE
RECEIVING INSPECTION
CHECKSHEET**

MACHINE MODEL

PC2000-8

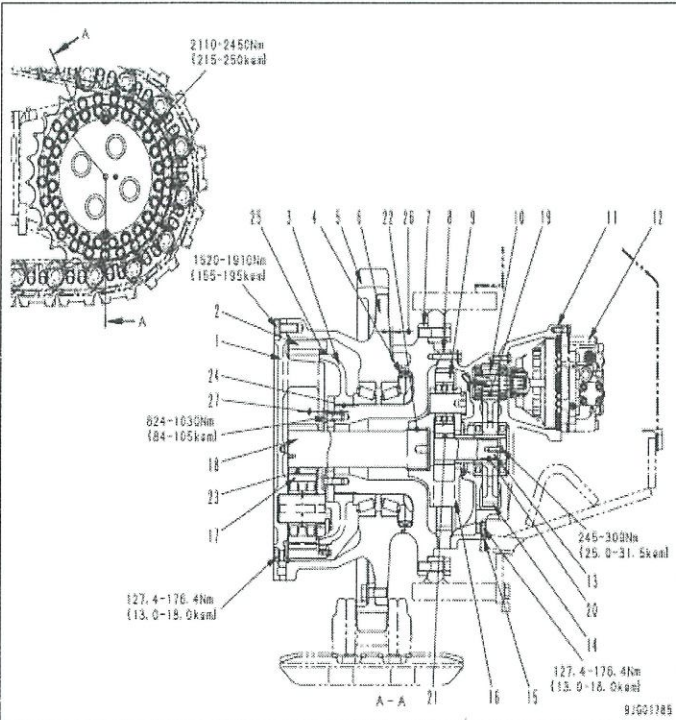
RO NO :

POWERTRAIN SECTION

RECEIVING & DELIVERY INSPECTION SHEET FINAL DRIVE	MACHINE MODEL	PC2000-8	REPORT NO.		DOCUMENT NO. :
	COMP. MODEL		COMP. S/N		PUBL. DATE 14/05/2010
	RECEIVING DATE		INSP. DATE		REVISION NO. 00
	DELIVERY DATE		WO NO.		PAGE 1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO.	ITEM	INSPECTION CONDITION	CHECK							
				IN	OUT						
 2110-2450Nm (215-250kcal) 1520-1910Nm (155-195kcal) 824-1030Nm (84-105kcal) 245-300Nm (25.0-31.5kcal) 127.4-176.4Nm (13.0-18.0kcal) 127.4-176.4Nm (13.0-18.0kcal) A-A 91001785		Final Drive									
		Model									
		Serial Number									
		Production No.									
	1	No. 2 Planetary carrier									
	2	No.2 ring gear(No.of teeth:69)									
	3	Floating seal									
	4	Housing									
	5	Sprocket									
	6	Hub									
	7	Housing									
	8	No.1 Ring gear No.of teeth:80									
	9	No.1 Planetary gear (No.of teeth : 33)									
	10	Drive gear (No.of teeth : 12)									
	11	Travel motor case									
	12	Travel motor									
	13	No.1 sun gear (No.of teeth :13)									
	14	Driven gear (No.of teeth :67)									
	15	Case									
	16	No.1 planetary carrier									
	17	No. 2 planetary gear (No.of teeth :26)									
18	No.2 Sun gear (No.of teeth : 15)										
19											
20											
21											
NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION <table border="1"> <tr> <td>OIL LEVEL</td> <td>EMPTY OR DRAINED</td> <td></td> </tr> <tr> <td></td> <td>PROPER LEVEL</td> <td></td> </tr> </table> REMARKS :						OIL LEVEL	EMPTY OR DRAINED			PROPER LEVEL	
OIL LEVEL	EMPTY OR DRAINED										
	PROPER LEVEL										

Jakarta,

Inspected by,

Aproved by,

YUNASRI

ABU NANSA



PT SAPTAINDRA SEJATI

FINAL DRIVE

ASSEMBLY

CHECKSHEET

MACHINE MODEL

PC2000-8

RO NO :









POWERTRAIN SECTION



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE RH	PUBLIC. DATE	16-07-2013
	COMP. S/N		REVISION NO.	00
	WO. NO		PAGE	1 of 4










PROCESS	START		ASSEMBLY BY	
	FINISH			

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
1	HOUSING ASSEMBLY	- Clean all part, check for dirt or damage - Install Spacer to housing - install Bearing to Shaft - Install Floating Seal make sure floating seal no damage - After install measure dimension a between the inner gear and floating seal set at 4 places Act. : mm	- Shrinking fit warm up to 100 C Using Special Tool - Make sure floating seal not Twist - Std max 1mm	RANDOM ITEM CHECK Name : Name : QA INSPECTOR PROD. SUPERVISOR			 
2	CASE ASSEMBLY	- install Outer race Bearing to Case - Install Floating Seal make sure floating seal no damage - After install measure dimension a between the inner gear and floating seal set at 4 places Act. : mm	- Expansion fit Using Special Tool - Make sure floating seal not Twist - Std max 1mm				
		- Install Case assy					
		- Install Bearing Inner race to Shaft and Case					
		- Install Ring gear to the case - Install Lock plate and mounting bolt Act. : Kgm	- Std torque 10 - 12.5 kgm - LT2				 
		- Install carrier 2nd to shaft - install spacer to shaft					 



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE RH	PUBLIC DATE	16-07-2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	2 of 4

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
3	PRE LOAD ADJUSTMENT	- Install Retainer Mounting with 4 bolt and Tightening Step 1st Act. : Kgm	- Std torque 3 - 4 kgm				
		Remove 4 mounting bolt and Rotate the case Check that it Rotates smoothly with bearing - Mounting with 4 Bolt and tightening Step 2nd Act. : Kgm	- Std torque 3 - 4 kgm				
		- Measure the Retainer to housing (Clearance a) from retainer surface to Housing surface Act. : mm	- Using Tool Filler gauge				
		- Install Shim equals the measured value Plus 0 - 0.1 mm Act. : mm					
		- Install Retainer and Mounting bolt Step 3rd Act. : Kgm	- Std torque 84 - 105 kgm - LT2				
4	SHAFT	- Measure End play Set Dial gauge on the ring gear and Lift to The top of Case Act. : mm	- Std End Play 0 - 0.1 mm				
		- Install Shaft to case assy					
5	CARRIER ASSY LARGE	- Install Button to carrier case - Install Bearing and spacer to the Gear - Install thrust washer on both side of the Gear - Install Shaft to the carrier	- Press fit - Press fit				
		- Install Lock plate and mounting bolt Act. : Kgm	- Std torque 25 - 31 kgm - LT2				
		- Install carrier assy to the case apply gasket sealant to the face of case and monting bolt Act. : Kgm	- LG-6 - Std torque 155 - 195 kgm - LT2				

RANDOM ITEM CHECK

Name : _____










QA INSPECTOR

Name : _____

PROD. SUPERVISOR







ASSEMBLY CHECK SHEET FINAL DRIVE PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE RH	PUBLIC DATE	16-07-2013
	COMP. S/N		REVISION NO.	00
	WO. NO		PAGE	3 of 4

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
6	CARRIER ASSY SMALL	- Install snap ring to the gear - Install spacer and then install outer race of the bearing - Install Inner race bearing and spacer to the gear - Install Shaft to the carrier - Install Lock plate and mounting bolt Act : Kgm - Install carrier assy to the case	- Press fit - Press fit - Std torque 10 - 12.5 kgm - LT2				  
7	RING GEAR AND SHAFT ASSY	- Install Ring gear to the case - apply gasket sealant to the face of case - Install Bearing inner race to the gear	- LG-6 - Press fit				 
8	CASE AND GEAR ASSY	- Install Oil lubrication plate to the case and mounting bolt - Install Thrust washer to the case - Install Bearing Outer race to the case - Install Oil lubrication tube to the case and mounting - Install 2 Bearing Inner race to the gear Act : Kgm	- Std torque 6 - 7.5 kgm - LT2 - Expansion fit - Std torque 6 - 7.5 kgm - LT2 - Press fit				   



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET FINAL DRIVE PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE RH	PUBLIC. DATE	16-07-2013
	COMP. S/N		REVISION NO.	00
	WO. NO		PAGE	4 of 4

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
9	CASE AND GEAR ASSY	- Install Gear and Shaft to the case					
		- Install spacer to the shaft - Install shaft to the gear - Install Holder and mounting bolt Act : Kgm	- Std torque 25 - 31 kgm - LT2				
		- Install case and gear assy to the case apply gasket sealant to the face of case - Mounting bolt Act : Kgm	- LG-6 - Std torque 46 - 58 kgm				
9	CASE ASSY	- Install Bearing Outer race to the case - Install case to the case apply gasket sealant to the face of case - Mounting bolt Act : Kgm	- Expansion fit - LG-6 - Std torque 25 - 31 kgm				

NOTE :

ASSEMBLY BY

(MECHANIC)

INSPECTED BY

(QA)

APPROVED BY

(GL / SPV)



PT SAPTAINDRA SEJATI

FINAL DRIVE

VISUAL & MEASUREMENT

CHECKSHEET

MACHINE MODEL







PC2000-8

RO NO :

POWERTRAIN SECTION






VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE RH PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/02/01
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	1 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT		DECISION														
						U/A	U/R	R/N												
1	Case 21T-27-72120	1. Thread portion 2. Bearing fitting portion 3. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark :			
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				
2	Gear 21T-27-72210	1. External gear teeth 2. Bearing fitting portion 3. Internal spline teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear					
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				
3	Shaft 21T-27-72190	1. Bearing fitting portion 2. External gear teeth 3. External spline teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear					
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				
4	Case 21T-27-72130	1. Thread fitting portion 2. Bearing fitting portion 3. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear					
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				
5	Gear 21T-27-72260	1. Matting face 2. Internal gear teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark :			
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				
6	Shaft 21T-27-71241	1. External spline teeth 2. External gear teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear					
Contens	Act																			
Normal																				
Crack																				
Scratch																				
Broken																				
Abn wear																				





VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE RH PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/02/01
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	2 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKEETH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT			DECISION			
							U/A	U/R	R/N	
7	Gear 21T-27-71250 Pin 21T-27-71430	1. Bearing fitting portion 2. External gear teeth 3. Lock contact surface All round		Contens	Gear	Pin	Gear			
				Normal						
				Crack						
				Scratch			Pin			
				Broken						
				Abn wear						
Remark :										
8	Carrier 21T-27-71270	1. Spacer contact surface 2. Pin fitting portion 3. Internal spline teeth All round		Contens	Act	Remark :				
				Normal						
				Crack						
				Scratch						
				Broken						
				Abn wear						
9	Housing 21T-27-71142	1. Bearing fitting portion		Contens	Act		X	Y	Z	
		Standart		limit						
		2. External spline teeth								
		3. Floating seal fitting portion								
		4. Thread fitting portion								
10	Case 21T-27-71151	1. Bearing fitting portion		Contens	Act		X	Y	Z	
		Standart		limit						
		2. Thread fitting portion								
		3. Sprocket contact surface								
		All round								
11	Housing 21T-27-71321	1. Internal spline teeth 2. Shims contact surface All round		Contens	Act	Remark :				
				Normal						
				Crack						
				Scratch						
				Broken						
				Abn wear						
12	Retainer 21T-27-71330	1. Matting face All round		Contens	Act	Remark :				
				Normal						
				Crack						
				Scratch						
				Broken						
				Abn wear						

VISUAL & MEASUREMENT CHECK SHEET FINAL DRIVE RH PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/02/01
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	3 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKEETH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT			DECISION																				
							U/A	U/R	R/N																		
13	Gear 21T-27-71311	1. Internal gear teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark :										
Contens	Act																										
Normal																											
Crack																											
Scratch																											
Broken																											
Abn wear																											
14	Shaft 21T-27-71280	1. External spline teeth External gear teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark :										
Contens	Act																										
Normal																											
Crack																											
Scratch																											
Broken																											
Abn wear																											
15	Gear 21T-27-71290 Pin 21T-27-71440	1. Bearing fitting portion 2. External gear teeth 3. Spacer contact surface All round		<table><tr><td>Contens</td><td>Gear</td><td>Pin</td></tr><tr><td>Normal</td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td></tr><tr><td>Scratch</td><td></td><td></td></tr><tr><td>Broken</td><td></td><td></td></tr><tr><td>Abn wear</td><td></td><td></td></tr></table>	Contens	Gear	Pin	Normal			Crack			Scratch			Broken			Abn wear			Remark :	Gear			
Contens	Gear	Pin																									
Normal																											
Crack																											
Scratch																											
Broken																											
Abn wear																											
	Pin																										
16	Carrier 21T-27-71164	1. Spacer contact surface 2. Washer contact surface Oring groove All round Pin fitting portion		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark :										
Contens	Act																										
Normal																											
Crack																											
Scratch																											
Broken																											
Abn wear																											

Note :

INSPECTION BY

MECHANIC

APPROVED BY

GL /QA

DELIVERY INSPECTION SHEET FINAL DRIVE	MACHINE MODEL	PC 2000-8	REPORT NO.		DOCUMENT NO.	:
	COMP. MODEL		COMP. S/N		PUBL. DATE	:
	RECEIVING DATE		INSP. DATE		REVISION NO.	00
	DELIVERY DATE		PROJECT NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

[illegible]

Inspected by,

Aproved by,