



PT SAPTAINDRA SEJATI

**SWING MACHINERY
RECEIVING INSPECTION
CHECKSHEET**

MACHINE MODEL

PC2000-8

RO NO :

POWERTRAIN SECTION

RECIIVING CHECK SHEET SWING MACHINERY PC 2000 - 8R	WO. NO		DOCUMENT NO	
	COMP.S/N		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
	JOB SITE		PAGE	

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO	ITEM	CHECK	REMARK
Side View 	1	Pinion Gear (Masked)		
	2	Main Case		
	3	Top Cover		
	4	Bracket Mounting Tube		
	5	Tube		
	6	Hose		
	7	Breather		
	8	Drain Valve with Hose		
	9	Warning (Sticker)		
	10	Name plate		
Front View 		Painting condition		
		Packing / wrapping		
		Stand		
		Bolt stand		
NOTE : PLEASE MARK "✓" FOLLOWING TO THE ACTUAL CONDITION				
OIL LEVEL		EMPTY OR DRAINED PROPER LEVEL		

Note :

INSPECTION BY

CHECK BY

CHECK BY

APPROVED BY

QA INSPECTOR

QA COORDINATOR

GL/SPV PROD

PPC



PT SAPTAINDRA SEJATI

SWING MACHINERY

DISASSEMBLY

CHECKSHEET

MACHINE MODEL






PC2000-8

RO NO :

POWERTRAIN SECTION

DISASSEMBLY CHECK SHEET		WO. NUMBER	DOCUMENT NO
SWING MAHINERY PC2000-8		COMP.	PUBLIC DATE
		COMP. S/N	REVISION NO.
		UNIT MODEL	PAGE
		PC2000-8	14/05/2010 00 1 of 2

PROCESS	START FINISH	DISASSEMBLY BY
---------	-----------------	----------------

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION			DECISION			FIGURE OF PARTS TO BE CHECKED
				ACTUAL			U/A	U/R	R/N	
1	COVER	VISUAL CHECK	Mating Face Check from Wear, Scratch, Damage Thread bolts condition from Damage, Wear	CONDITION	FACE	THREAD				
2	SHAFT PINION	VISUAL CHECK MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition), Wear of spline. <i>Maximum wear less than 0,35 mm</i>	CONDITION	GEAR	SPLINE				
3	RING GEAR	VISUAL CHECK MEASUREMENT	Internal gear teeth (Crack, Pitting, Breakage, Abnormal wear condition).	CONDITION	GEAR					
4	CASE	VISUAL CHECK	Mating Face Check from Wear, Scratch, Damage Thread bolts condition from Damage, Wear	CONDITION	FACE	THREAD				
5	SHAFT	VISUAL CHECK MEASUREMENT	Wear at surface contact with bearing Wear at surface contact with thrust washer Crack (Damage) at hole Thread.	CONDITION	SHAFT					
6	LOCK	VISUAL CHECK	Crack (Damage) at hole of Bolt.							
7	GEAR	VISUAL CHECK MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition), Internal seat contact with bearing.	CONDITION	GEAR					
8	CARRIER	VISUAL CHECK MEASUREMENT	Shaft Boss (Crack, Distortion, Wear), Thread hole condition.	CONDITION	BOSS	THREAD				
9	SPACER	VISUAL CHECK MEASUREMENT	Wear at contact with gear or Carrier. <i>Maximum wear less than 0,35 mm</i>	CONDITION	SPACER					
10	DOWEL PIN	VISUAL CHECK	Wear at contact with lock							
11	GEAR	VISUAL CHECK MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition), Spline wear condition <i>Maximum wear less than 0,35 mm</i>	CONDITION	GEAR					
12	LOCK	VISUAL CHECK	Crack (Damage) at hole of Bolt.							
13	SHAFT	VISUAL CHECK MEASUREMENT	Wear at surface contact with bearing Wear at surface contact with thrust washer Crack (Damage) at hole Thread .	CONDITION	SHAFT					
14	GEAR	VISUAL CHECK MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition), Internal seat contact with bearing.	CONDITION	GEAR					
15	CARRIER	VISUAL CHECK MEASUREMENT	Shaft Boss (Crack, Distortion, Wear), Thread hole condition.	CONDITION	BOSS	THREAD				
16	RING GEAR	VISUAL CHECK MEASUREMENT	Internal gear teeth (Crack, Pitting, Breakage, Abnormal wear condition).							
17	CASE	VISUAL CHECK MEASUREMENT	Mating face check condition from Crack, Wear Thread Damage, Seat Bearing Contact, Seat Seal oil, check from Wear, Crack, Scratch, and Damage.	CONDITION	FACE	THREAD				
18	GEAR	VISUAL CHECK MEASUREMENT	External gear teeth (Crack, Pitting, Breakage, Abnormal wear condition), Spline wear condition <i>Maximum wear less than 0,35 mm</i>	CONDITION	GEAR					

DISASSEMBLY CHECK SHEET SWING MAHINERY PC2000-8	PROJECT NUMBER		DOCUMENT NO	
	COMP. MODEL		PUBLIC. DATE	01/8/2010
	COMP. S/N		REVISION NO.	00
	UNIT MODEL		PAGE	2 of 2

[illegible]

DISASSEMBLY BY, _____

(MECHANIC)

APPROVED BY, _____

(SUPERVISOR)



PT SAPTAINDRA SEJATI

SWING MACHINERY
VISUAL & MEASUREMENT
CHECKSHEET
MACHINE MODEL

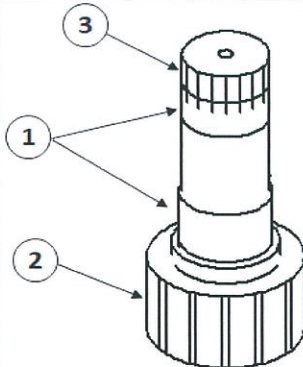




PC2000-8

RO NO :

POWERTRAIN SECTION







VISUAL & MEASUREMENT CHECK SHEET SWING MACHINERY PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/09/02
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	1 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT	DECISION																																			
					U/A	U/R	R/N																																	
1	Shaft 21T-26-67110	1. Bearing fitting portion 2. External Gear teeth 3. External spline teeth All Round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> <i>Remark</i>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																									
Contens	Act																																							
Normal																																								
Crack																																								
Scratch																																								
Broken																																								
Abn wear																																								
2	Cover 209-26-71230	1. Seal fitting portion 2. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> <i>Remark</i>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																									
Contens	Act																																							
Normal																																								
Crack																																								
Scratch																																								
Broken																																								
Abn wear																																								
3	Spacer 209-26-71360	1. Side contact surface 2. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> <i>Remark</i>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																									
Contens	Act																																							
Normal																																								
Crack																																								
Scratch																																								
Broken																																								
Abn wear																																								
4	Case 209-26-71212	1. thread fitting portion <i>Braring fitting portion (2)</i> <table><tr><th>Standart</th><th>limit</th></tr><tr><td></td><td></td></tr></table> <i>Braring fitting portion (3)</i> <table><tr><th>Standart</th><th>limit</th></tr><tr><td></td><td></td></tr></table>	Standart	limit			Standart	limit				<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> <i>Remark</i>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		<i>Braring fitting portion (1)</i> <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td></td><td></td><td></td></tr></table> <i>Braring fitting portion (2)</i> <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td></td><td></td><td></td></tr></table>	X	Y	Z				X	Y	Z						
Standart	limit																																							
Standart	limit																																							
Contens	Act																																							
Normal																																								
Crack																																								
Scratch																																								
Broken																																								
Abn wear																																								
X	Y	Z																																						
X	Y	Z																																						
					U/A	U/R	R/N																																	
5	Coupling 209-26-71240	1. Internal spilne teeth 2. External spline teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> <i>Remark</i>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																									
Contens	Act																																							
Normal																																								
Crack																																								
Scratch																																								
Broken																																								
Abn wear																																								





VISUAL & MEASUREMENT CHECK SHEET SWING MACHINERY PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/09/02
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	2 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKECTH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT		DECISION																				
						U/A	U/R	R/N																		
6	Gear 209-26-71160	1. Internal gear teeth 2. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark									
Contens	Act																									
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										
7	Gear 208-27-61140 Shaft 207-27-61250	1. Bearing fitting portion 2. External gear teeth 3. Side contact surface All round		<table><tr><td>Contens</td><td>1</td><td>2</td></tr><tr><td>Normal</td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td></tr><tr><td>Scratch</td><td></td><td></td></tr><tr><td>Broken</td><td></td><td></td></tr><tr><td>Abn wear</td><td></td><td></td></tr></table>	Contens	1	2	Normal			Crack			Scratch			Broken			Abn wear			Remark	1		
Contens	1	2																								
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										
8	Carrier 208-27-61170	1. Matting face 2. spcer contact surface All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark									
Contens	Act																									
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										
9	Gear 208-27-61132	1. spacer contact surface 2. External gear teeth		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark									
Contens	Act																									
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										
10	Spacer 209-26-71190	1. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark									
Contens	Act																									
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										
11	Gear 209-26-71150	1. Internal gear teeth 2. Matting face All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear		Remark									
Contens	Act																									
Normal																										
Crack																										
Scratch																										
Broken																										
Abn wear																										

VISUAL & MEASUREMENT CHECK SHEET SWING MACHINERY PC 2000 - 8	WO NUMBER		DOCUMENT NO	RC/QR03/PT/09/02
	COMP.MODEL		PUBLIC DATE	
	COMP.S/N		REVISION NO	
	UNIT CODE		PAGE	3 of 3

PROCESS	START		INSPECTION BY		
	FINISH				

NO	PART NAME	CHECKING POINT	SKEETH DRAWING OR PHOTOES	VISUAL CHECK & MEASUREMENT	DECISION																												
					U/A	U/R	R/N																										
12	Gear 21T-26-31140 Shaft 20Y-26-21320	1. Bearing fitting portion 2. spacer contact surface 3. External gear teeth All round		<table><tr><td>Contens</td><td>1</td><td>2</td></tr><tr><td>Normal</td><td></td><td></td></tr><tr><td>Crack</td><td></td><td></td></tr><tr><td>Scratch</td><td></td><td></td></tr><tr><td>Broken</td><td></td><td></td></tr><tr><td>Abn wear</td><td></td><td></td></tr></table> Remark <table><tr><td>1</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td></tr></table>	Contens	1	2	Normal			Crack			Scratch			Broken			Abn wear			1				2						
Contens	1	2																															
Normal																																	
Crack																																	
Scratch																																	
Broken																																	
Abn wear																																	
1																																	
2																																	
	Carrier 21T-26-31120	1. spacer contact surface 2. Bearing contact surface All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> Remark <table><tr><td></td><td></td><td></td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																		
Contens	Act																																
Normal																																	
Crack																																	
Scratch																																	
Broken																																	
Abn wear																																	
14	Gear 21T-26-31130	1. Internal spline teeth 2. External gear teeth All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> Remark <table><tr><td></td><td></td><td></td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																		
Contens	Act																																
Normal																																	
Crack																																	
Scratch																																	
Broken																																	
Abn wear																																	
	Cover 21T-26-31110	1. Thread fitting portion 2. Mating face 3. Oring groove All round		<table><tr><td>Contens</td><td>Act</td></tr><tr><td>Normal</td><td></td></tr><tr><td>Crack</td><td></td></tr><tr><td>Scratch</td><td></td></tr><tr><td>Broken</td><td></td></tr><tr><td>Abn wear</td><td></td></tr></table> Remark <table><tr><td></td><td></td><td></td><td></td></tr></table>	Contens	Act	Normal		Crack		Scratch		Broken		Abn wear																		
Contens	Act																																
Normal																																	
Crack																																	
Scratch																																	
Broken																																	
Abn wear																																	

Note :

INSPECTION BY

APPROVED BY

MECHANIC

GL /QA



PT SAPTAINDRA SEJATI

**SWING MACHINERY
ASSEMBLY
CHECKSHEET
MACHINE MODEL**

PC2000-8

RO NO :








POWERTRAIN SECTION



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET SWING MACHINERY PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	SWING MACHINERY F	PUBLIC DATE	18-07-2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	1 of 3

PROCESS	START	ASSEMBLY BY
	FINISH	

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
1	BEARING AND SEAL ASSEMBLY	- Clean all part, check for dirt or damage - Install Bearing to the case - install Bearing to Shaft After install Bearing Make sure No clearance Between Surface bearing and case lower side - Install Oil seal to the cover apply gasket sealant to outside primer of seal - Install cover to the case apply gasket sealant to the face of cover mounting bolt Act : Kgm	- Expansion fit or Pres fit - Using Special tool for Press - LG-6 - Std torque 10 - 12.5 kgm				  
2	PINION SHAFT ASSEMBLY	- Install Spacer to the case apply gasket sealant to the face of cover measure the clearance (a) Act : mm Make sure the spacer is correctly positioned - Install Pinion shaft to the case - Install Bearing Inner race to Shaft and Case Make sure the seal lip contact surface center positioned	- Using push tool - Using Tool Filler gauge - Std 1 - 2 mm - Press fit - Using Special tool for Press				
3	WHEEL HUB ASSEMBLY	- Install bearing to the case press bearing by pressing both the inner and outer race simultaneously measure the clearance (b) Act : mm Make sure the case rotated smoothly - Install hub to the case - Install plate to the case mounting bolt Act : Kgm	- Press fit - Using Special tool for Press - Using Tool Filler gauge - Std 1 - 2 mm - Std torque 35 - 43.5 kgm - LT-2				 
4	CARRIER 2 ASSEMBLY	- Install Thrust washer to the carrier					








RANDOM ITEM CHECK

Name : _____ Name : _____

QA INSPECTOR PROD. SUPERVISOR










ASSEMBLY CHECK SHEET SWING MACHINERY PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	SWING MACHINERY F	PUBLIC DATE	18-07-2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	2 of 3

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
5	CARRIER 1 ASSEMBLY	- Install Bearing to the Gear - Install thrust washer on both side of the Gear - Install Gear to the carrier - Install Shaft to the carrier Make sure the gear rotated smoothly Make sure the thrust washer no damage - Install pin to the shaft at 4 location Make sure the pin and groove no damage after assembly carrier check that the gear rotates smoothly	- Press fit - Press fit - Using plastic hammer				
							
							
5	CARRIER 2 AND RING GEAR ASSEMBLY	- Install carrier assy to the case - Install Ring gear to the case apply gasket sealant to the face of case - Install cover to the case Make sure aligning the oil groove of the oil filler apply gasket sealant to the face of ring gear mounting bolt Act. : Kgm	- LG-6 - LG-6 - Std torque 35 - 43.5 kgm				
							
							
6	SUN GEAR 2 ASSEMBLY	- Install thrust washer to the Gear - Install ball to the Gear - Install holder to the Gear Make sure is correctly positioned - Install sun gear to the carrier					
							



ASSEMBLY CHECK SHEET SWING MACHINERY PC2000-8	UNIT MODEL	PC2000-8	DOCUMENT NO.	
	COMP. MODEL	SWING MACHINERY F	PUBLIC DATE	18-07-2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	3 of 3

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
7	CARRIER 1 ASSEMBLY	- Install Bearing to the Gear - Install thrust washer on both side of the Gear - Install Gear to the carrier - Install Shaft to the carrier Make sure the gear rotated smoothly Make sure the thrust washer no damage - Install pin to the shaft at 3 location Make sure the pin and groove no damage after assembly carrier check that the gear rotates smoothly	- Press fit - Press fit - Using plastic hammer				  
7	RING GEAR AND SUN GEAR ASSEMBLY	- Install carrier assy to the case - Install Ring gear to the case apply gasket sealant to the face of case Make sure aligning the drill hole of the oil filler port - Install thrust washer to the carrier - Install sun gear to the carrier - Install cover to the ring gear and case apply gasket sealant to the face of cover mounting bolt Act : Kgm - Install oil filler port and breather tube to the case apply gasket sealant to the thread of oil filler port mounting oil filler port Act : Kgm - Install bracket mounting oil filler port Act : Kgm	- LG-6 - LG-6 - Std torque 25 - 31.5 kgm - LG-6 - Std torque 4 - 7 kgm - Std torque 10 - 12.5 kgm				   

NOTE :

ASSEMBLY BY

INSPECTED BY

APPROVED BY

(MECHANIC)

(QA)

(GL / SPV)



PT SAPTAINDRA SEJATI

SWING MACHINERY

DELIVERY

CHECKSHEET

MACHINE MODEL

PC2000-8

RO NO :

POWERTRAIN SECTION

DELIVERY CHECK SHEET SWING MACHINERY PC 2000 - 8R	WO. NO		DOCUMENT NO	
	COMP.S/N		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
	PART NO. COMPONENT	21T - 26 - 00300	PAGE	

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO	ITEM	CHECK	REMARK
Side View 	1	Pinion Gear (Masked)		
	2	Main Case		
	3	Top Cover		
	4	Bracket Mounting Tube		
	5	Tube		
	6	Hose		
	7	Breather		
	8	Drain Valve with Hose		
	9	Warning (Sticker)		
	10	Name plate		
Front View 		Painting condition		
		Packing / wrapping		
		Stand		
		Bolt stand		
		Delivery check sheet		
		Quality passed (Sticker)		
NOTE : PLEASE MARK "✓" FOLLOWING TO THE ACTUAL CONDITION				
OIL LEVEL	EMPTY OR DRAINED			
	PROPER LEVEL			

Note :

INSPECTION BY

APPROVED BY

QA/GL

QA COORDINATOR