


Differential (REN8301-10)

i08265395

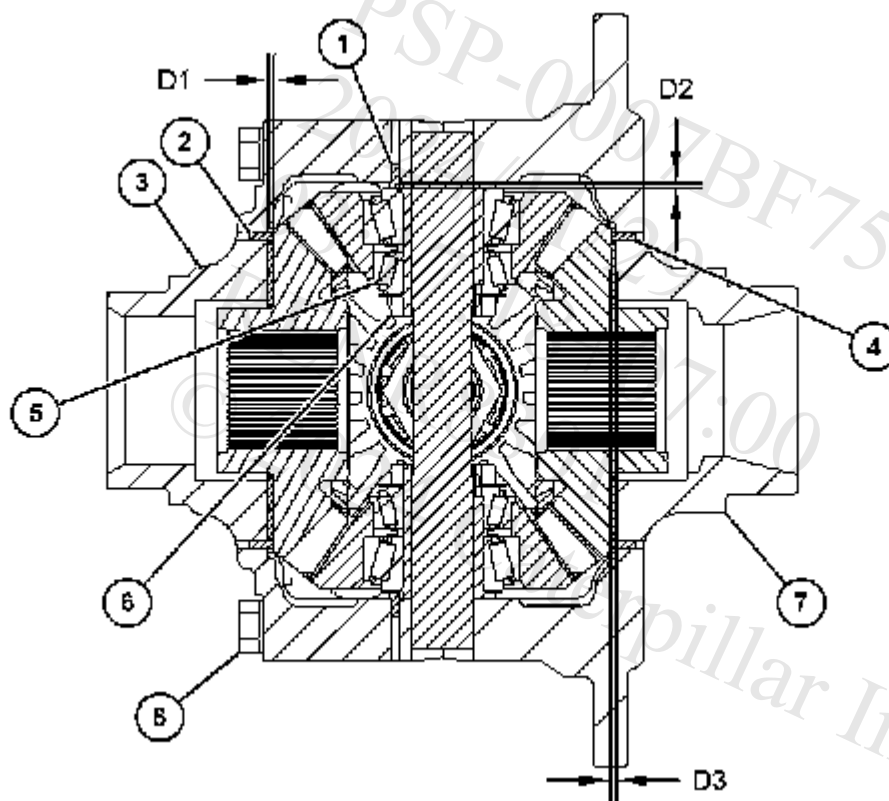

g06607167

Table 1

Item	Qty	Part	Specification Description
D1	2	3D-6509 Dowel	Protrusion of dowel (2) from the surface of the differential housing (3) is 3.60 ± 0.10 mm (0.142 ± 0.004 inch)
D2	4	3D-6509 Dowel	Protrusion of dowel (1) from the surface of the differential housing (3) is 3.96 ± 0.05 mm (0.156 ± 0.002 inch)
D3	2	3D-6509	Protrusion of dowel (4) from the surface of the differential housing (7) is 3.60 ± 0.10 mm (0.142 ± 0.004 inch)
6	4	107-2958 Nut	Torque to 70 ± 15 N·m (52 ± 11 lb ft). Rotate roller bearing assembly (5) while tightening to ensure proper seating of rollers.
8	8	8T-0656 Bolt	Use the following procedure to tighten: 1. Before assembly, apply Loctite® 243 to the threads. 2. In a star pattern, tighten bolts to 140 ± 20 N·m (103 ± 15 lb ft). 3. In a star pattern, tighten bolts to 350 ± 50 N·m (258 ± 37 lb ft) and then rotate all bolts to an additional angle of 60 ± 5 degrees.

PSP-0007BF75

2024/11/29

03:17:08+07:00

i06681952

© 2024 Caterpillar Inc.