

SMCS - 3256, 3258, 3270, 3281, 3283, 3284

i08265412

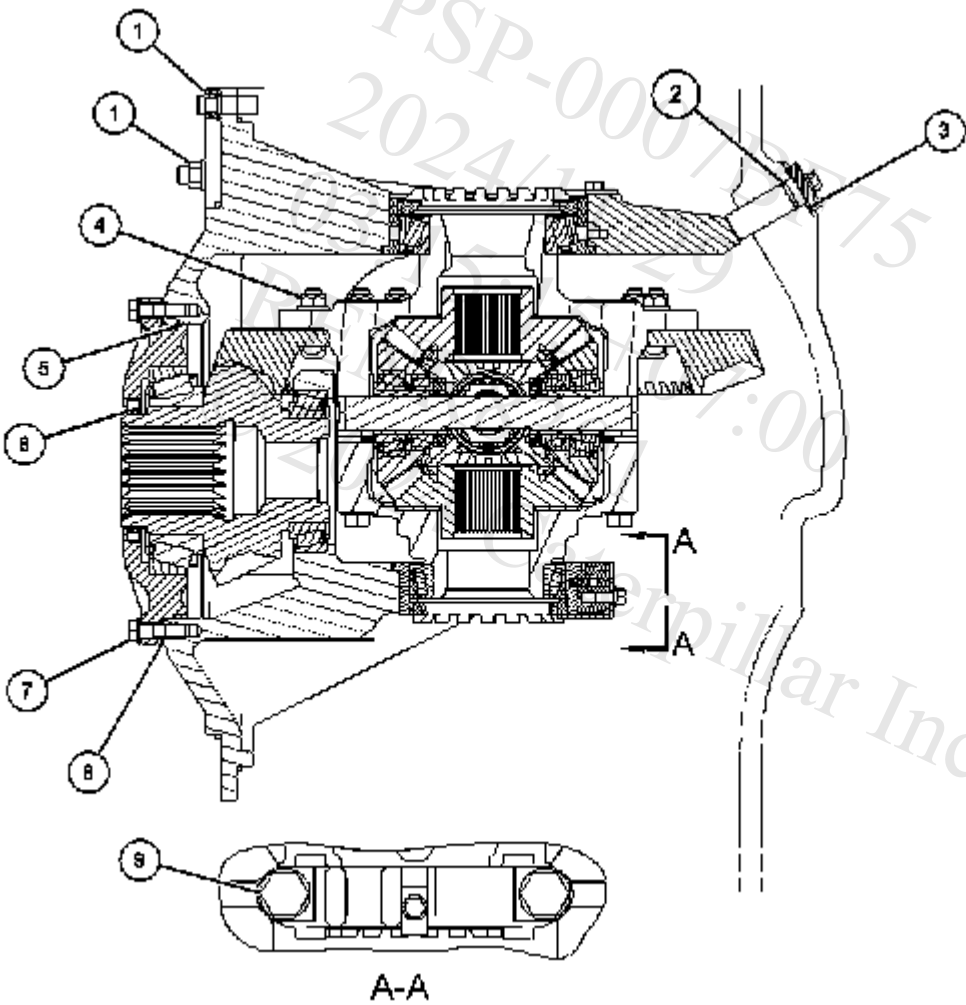


Illustration 1

g06607192

Table 1

Item	Qty	Part	Specification Description
1	26	2J-3506 Full Nut	Torque to 430 ± 60 N·m (317 ± 44 lb ft).
2	1	2H-3932 O-Ring Seal	Lubricate bore lightly with the lubricant being sealed.
3	1	9M-5874 Shim Pack	As required, use the following shim pack. Total thickness is 3.30 mm (0.130 inch). Thickness of each shim in the pack for ten shims is 0.07 mm (0.003 inch). Thickness of each shim in the pack for twenty shims is 0.13 mm (0.005 inch).
4	14	2K-0337 Locknut	Torque to 440 ± 40 N·m (325 ± 30 lb ft).
5	1	7S-8554 O-Ring Seal	Lubricate bore lightly with the lubricant being sealed.

6	1	9X-7395 Seal As	Lubricate sealing lip lightly with the lubricant being sealed.
7	16	8S-9092 Bolt	Before assembly, apply Loctite [®] 263 ⁽¹⁾ or Loctite [®] 270 ⁽²⁾ to the threads. Torque to 270 ± 40 N·m (199 ± 30 lb ft).
8	As required use the following shims.		
	10	112-8223 Shim	Thickness is 0.1778 mm (0.00700 inch).
	10	112-8224 Shim	Thickness is 0.12 mm (0.004 inch).
9	4	-	Torque to 1100 ± 150 N·m (811 ± 111 lb ft).

(1) In U.S.A. and rest of the World.

(2) In Europe only.

PSP-0007BF75

2024/11/29

03:14:43+07:00

i01098080

© 2024 Caterpillar Inc.

PSP-0007BF75
2024/11/29
03:15:15+07:00
REN8301
© 2024