

2024/08/12

Rear Wheel (REN8301-10)

SMCS - 3260, 4001, 4201, 4205, 4208, 4215, 4234

i10261511

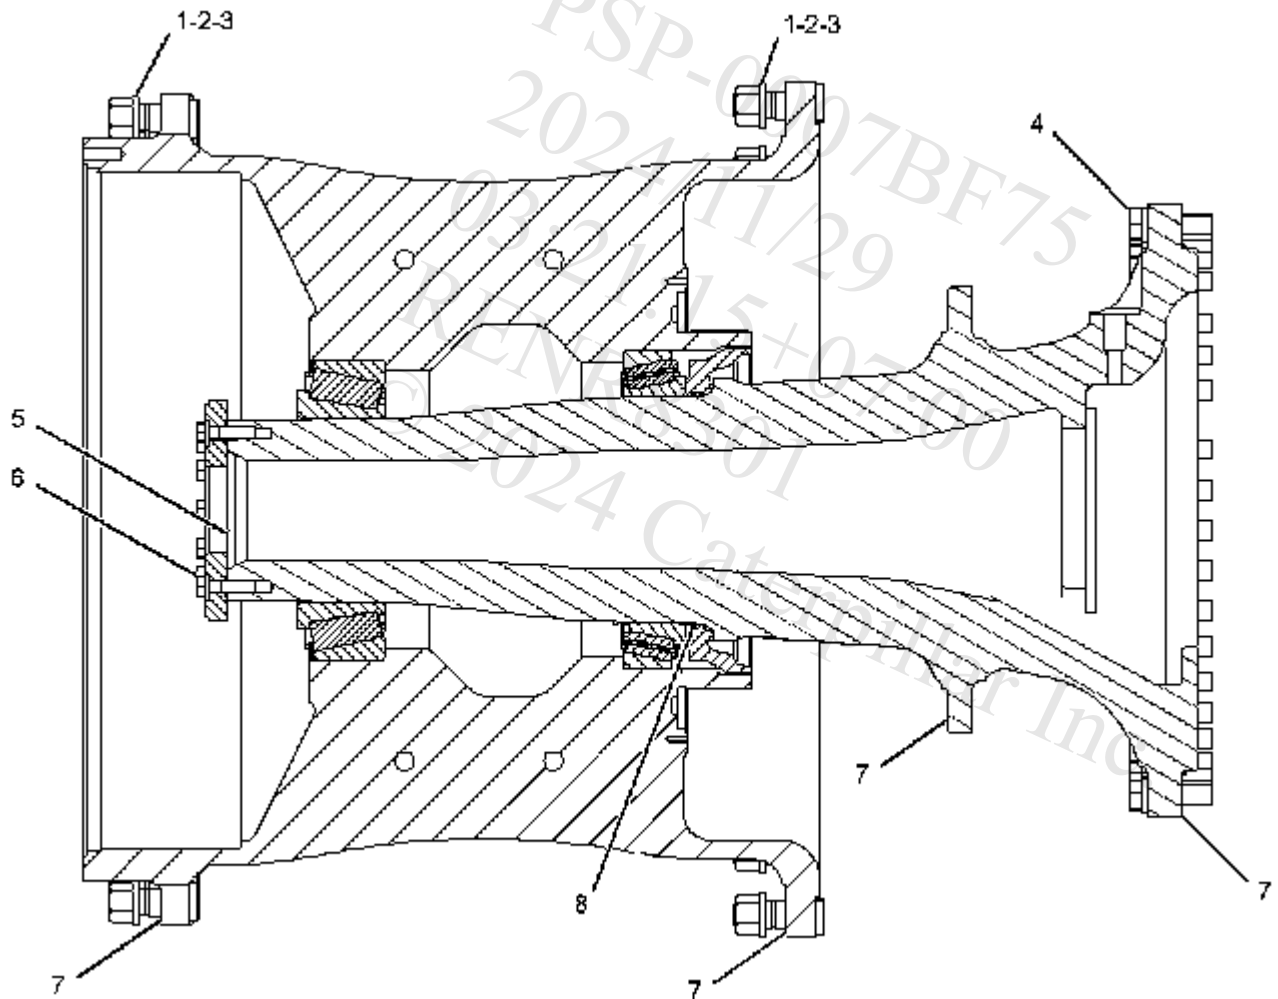


Illustration 1

g03864268

Table 1

Specification for 470-3818 Rear Wheel Gp			
Item	Qty	Part	Specification Description
1	80	4D-8695 Bolt	Before assembly, apply black Loctite Graphite-50 to threads.
2	80	5D-0764 Hard Washer	Before assembly, apply black Loctite Graphite-50.
3	80	5D-0765 Full Nut	Torque to 1200 ± 50 N·m (885 ± 37 lb ft).
4	80	1D-4638 Bolt	Torque to 1050 ± 150 N·m (774 ± 111 lb ft).
5	2	9D-2426 Shim Pack	In order to obtain bearing preload with a vertical or horizontal assembly of parts, use the following procedure to tighten the bolts: 1. Assemble retainer with six bolts equally spaced and tighten

			the bolts to 140 N·m (103 lb ft). 2. Rotate the wheel for two revolutions. 3. Again tighten the bolts to 140 N·m (103 lb ft) and again rotate the wheels for two revolutions. 4. Loosen all bolts to 120 degrees and rotate the wheel for two revolutions. 5. Tighten bolts to 110 N·m (81 lb ft) and rotate the wheel two revolutions. 6. Again tighten the bolts to 110 N·m (81 lb ft) and again rotate the wheels for two revolutions. 7. Again tighten the bolts to 110 N·m (81 lb ft). 8. Measure the distance from end of spindle to end of hub. 9. Install the shim pack equal to the above measurement and add 0.381 mm (0.0150 inch).
			Total thickness is 2.90 ± 0.08 mm (0.114 ± 0.003 inch).
6	24	0S-1625 Bolt	Use the following procedure to tighten the bolts: Apply red Loctite 263 to threads after bearing adjustment. Initial torque for bolts is 22 ± 6 N·m (16 ± 4 lb ft). If the bolt does not reach full depth at this torque value, then replace the bolt. Intermediate torque for bolts is 125 ± 20 N·m (92 ± 15 lb ft). Final torque for bolts is 250 ± 15 N·m (184 ± 11 lb ft).
7	-	-	Before assembly, rim mounting surfaces must be clean and free of oil and grease.
8	2	129-3719 O-Ring Seal	Lubricate the shaft and seal lightly with the lubricant that is being sealed.

PSP-0007BF75

2024/11/29

03:20:58+07:00

i06230642

© 2024 Caterpillar Inc.