


BATTERY INPUT & PROTECTION




CURRENT & VOLTAGE SENSE

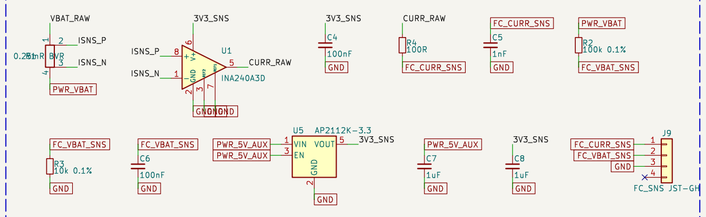


BATTERY OUTPUTS




19 V JETSON RAIL — LM5176 CONTROL

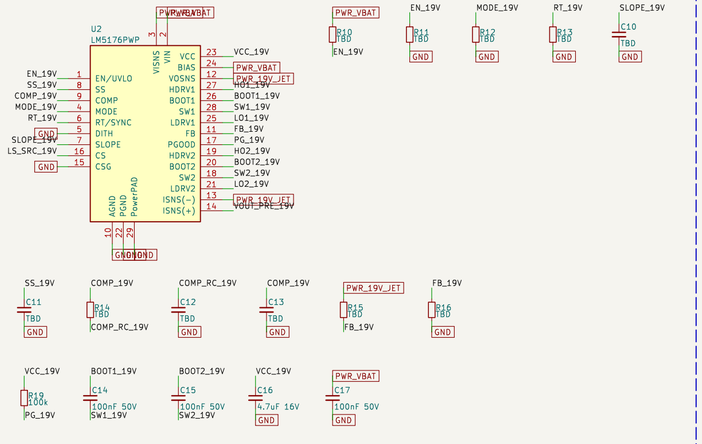


19 V JETSON RAIL — POWER STAGE

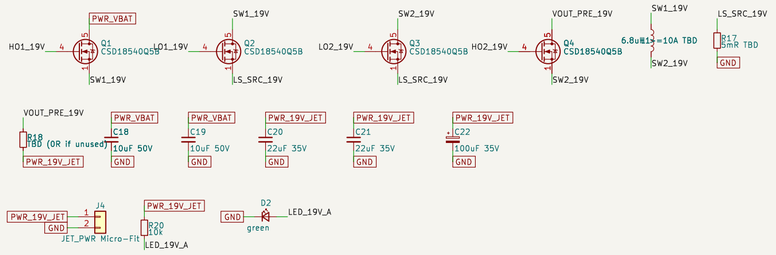

5 V AUX RAIL — TPS54560B

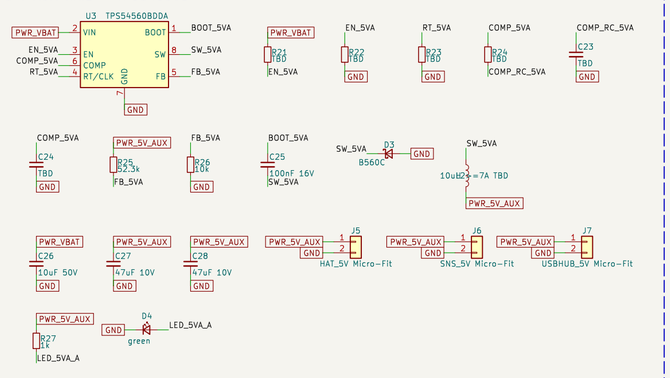

5 V SERVO RAIL — TPS54560B

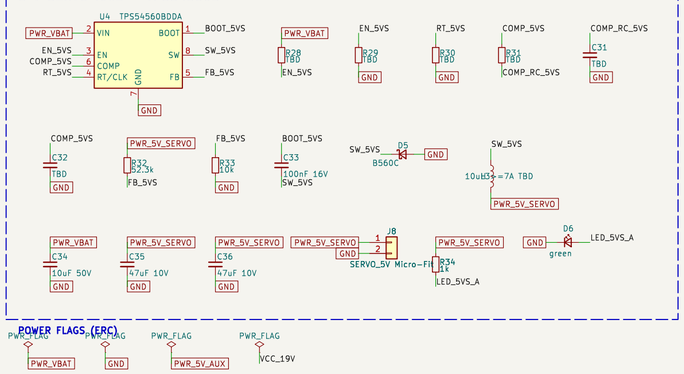

MECHANICAL



POWER FLAGS (ERC)



NOTES

1. TBD values: calculate from the LM5176 and TPS54560B datasheets (Detailed Design sections) or TI WEBENCH before layout.
2. FB dividers R25/R26 and R31/R32 assume a 0.8 V reference. Verify against the TPS54560B datasheet.
3. AGND and PGND share the GND net. Join them under U2's thermal pad and keep each power loop compact.
4. R1 is a 4-terminal shunt. Route ISNS_P / ISNS_N as a tight Kelvin pair from R1's sense pads to U1.
5. Check J1/J2/J3 pad 1 = + against the AMASS drawing before ordering.
6. Scale factors for the FC: FC_CURR_SNS = 25 mV/A (40 A/V), FC_VBAT_SNS = VBAT / 11.

Rev A bootstrap
Bootstrapped by hardware/tools/gen_kicad.py; edit in KiCad from here on
Values marked TBD must be calculated from the part datasheet before layout
Battery in: 19 V Jetson, 5 V aux, 5 V servo rails; current + voltage sense to FC
Jetson drone electronics

Sheet: /
File: pdb.kicad_sch

Title: PDB — Power Distribution Board

Size: A2	Date: 2026-11-06	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1