



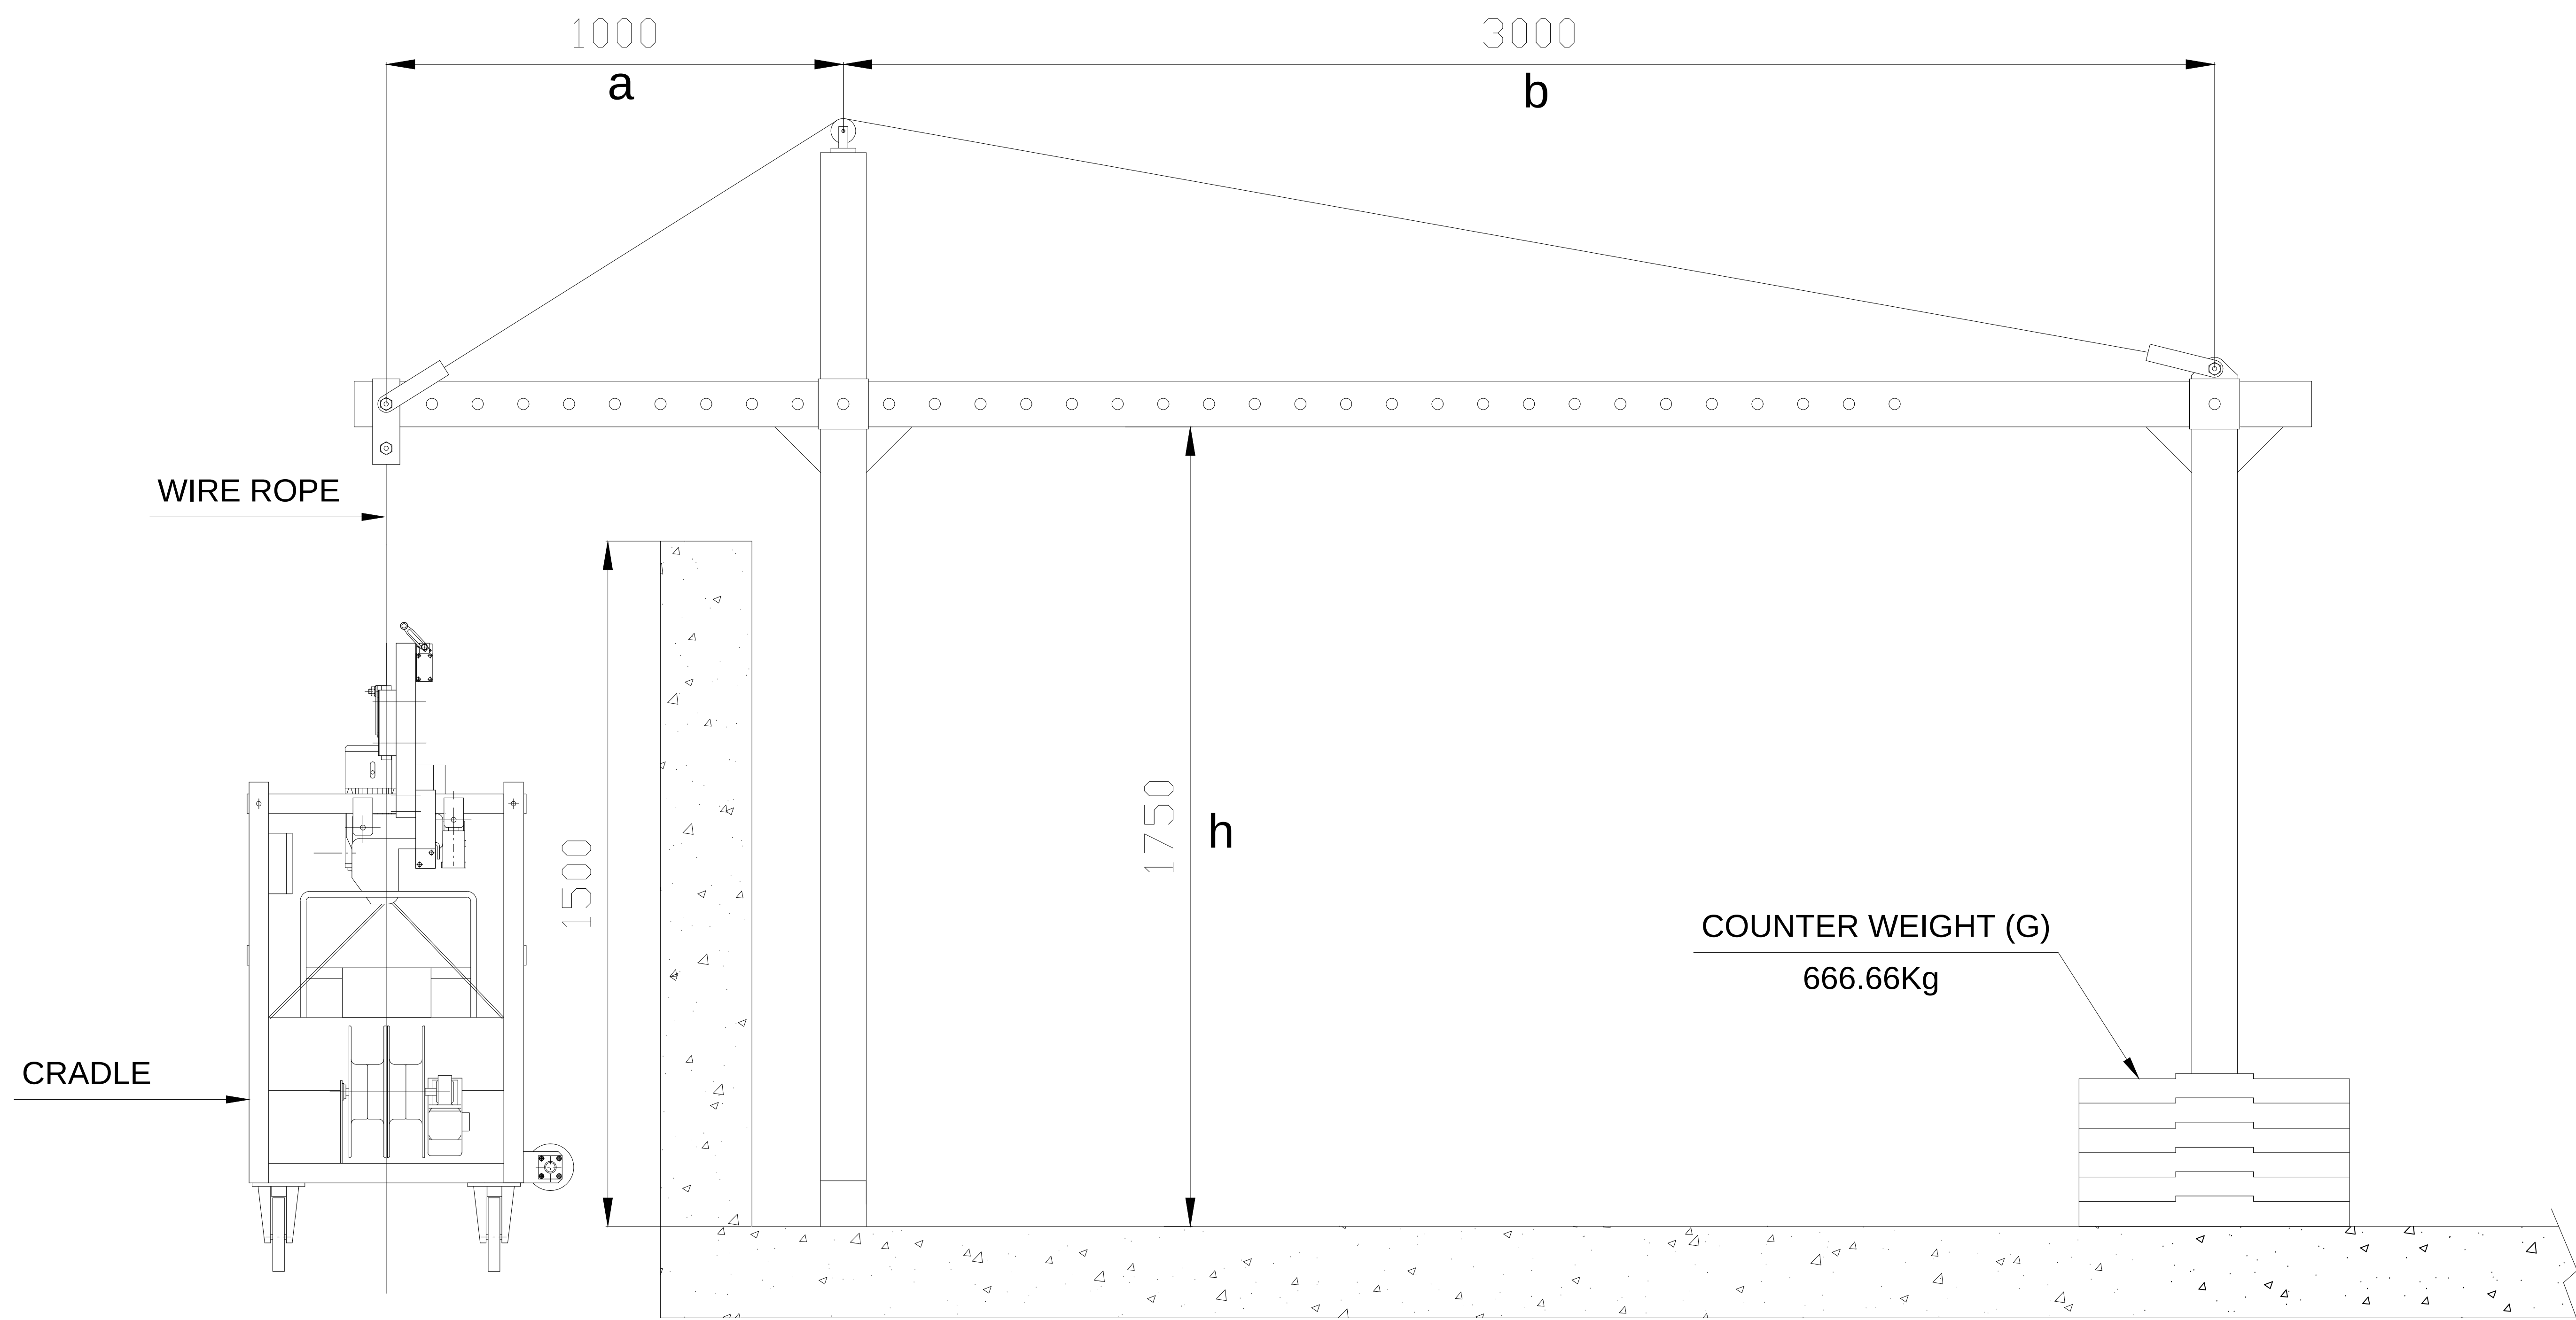

HANGING BASE DETAIL

| Front beam Overhang<br>a (mm) | Maximum Capacity<br>W2 (kg) | b (mm) distance between front and rear support |                          | Loaded Counter Weight |                  | Reaction Loads 'R' (kg) |                |
|-------------------------------|-----------------------------|------------------------------------------------|--------------------------|-----------------------|------------------|-------------------------|----------------|
|                               |                             | Steel Rope Length < 100m                       | Steel Rope Length < 200m | Weight G (kg)         | Quantity (piece) | Rope Lg < 100m          | Rope Lg < 200m |
| 700                           | 800                         | > 3000                                         | > 3400                   | 1000                  | 40               | 1758                    | 1990           |
| 900                           | 800                         | > 3600                                         | > 4000                   | 1000                  | 40               | 1782                    | 2022           |
| 1100                          | 800                         | > 3600                                         | > 4000                   | 1000                  | 40               | 1860                    | 2104           |
| 1300                          | 800                         | > 4000                                         | > 4000                   | 1000                  | 40               | 1888                    | 2186           |
| 1500                          | 800                         | > 4000                                         | > 4000                   | 1200                  | 48               | 1960                    | 2270           |
| 1700                          | 800                         | > 4000                                         | > 4000                   | 1400                  | 56               | 2030                    | 2352           |

REACTION LOADS TABLE

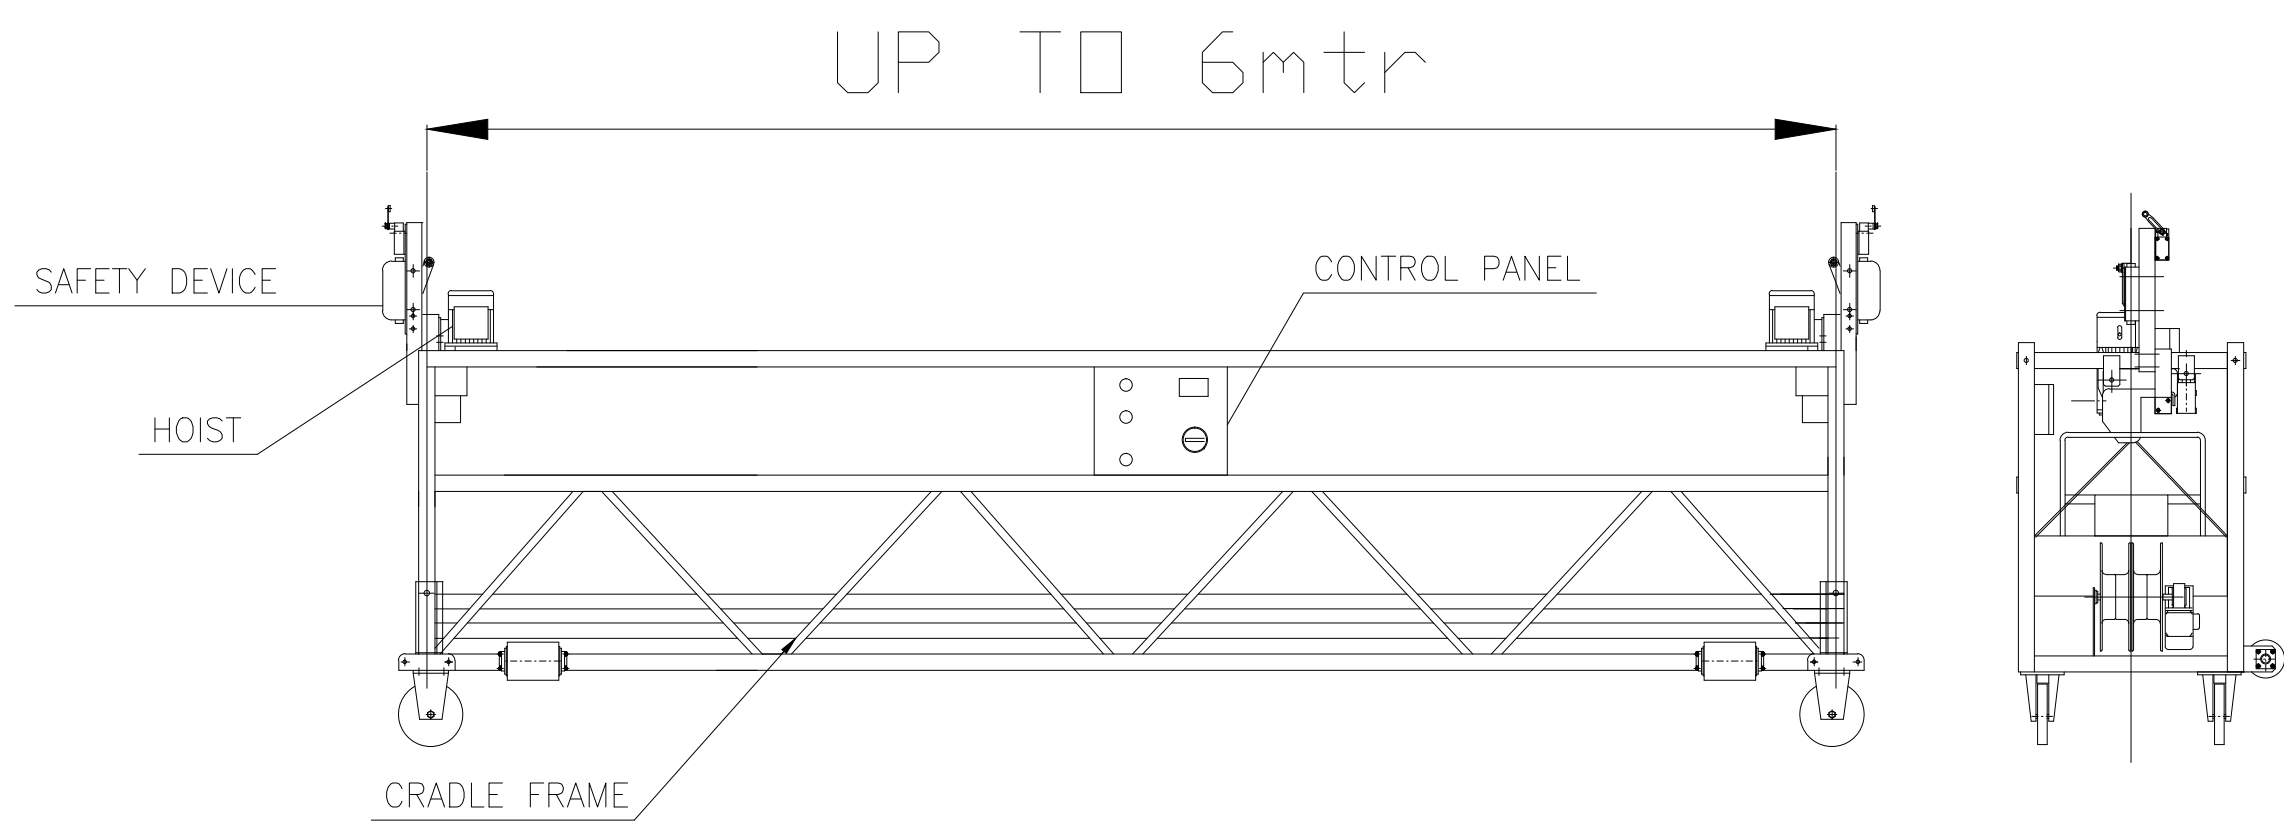

ELECTRICAL PANEL

1. PUSH EMERGENCY : 1NO.
2. HOIST UP PUSH : 1NO.
3. HOIST DOWN PUSH : 1NO
4. SELECTOR SWITCH MOVEABLE : 1NO.  
(HOIST LEFT & RIGHT FOR LEVEL MOTORS)

HOIST SPECIFICATION

1. RATED LIFTING FORCE 630KG
2. HOIST MASS 40KG
3. RATED LIFTING SPEED 9.3M/MIN
4. MOTOR 1.0KW,380V AC, 3C+E
4. MOTOR BRAKE TORQUE 15.2 NM
4. MOTOR BRAKE VOLTAGE 99VDC

ROPE SPECIFICATION

1. RATED BREAKING STRAIN 53KN
  2. DIAMETER 8.3MM
  3. RATED STRENGTH 1960 MPa
- USE ONLY ROPE AS DESIGNED BY HOIST MANUFACTURE

FEATURES

1. LIGHT WEIGHT ALLOWS SMALLER SUSPENSION RIG/DAVIT/NEEDLE
2. SIMPLE MODULAR CONSTRUCTION.  
END/PICKUP FRAMES ARE GALVANISED STEEL  
TRUSS MEMBERS ARE EXTRUDED ALUMINUM  
FLOORS IS ALUMINUM CHEQUER PLATE
3. FULL UP LIMIT
4. BLOCK STOP LEVER LOCKS ONTO SECOND ROPE SHOULD TENSION BE LOST IN THE PRIMARY HOIST ROPE
5. MOTORISED ROPE STORAGE REELERS ON BOARD
6. CASTORS FOR EASY MOVEMENT

CRADLE SPECIFICATIONS

- |                         |                           |
|-------------------------|---------------------------|
| SAFE WORKING LOAD (SWL) | 240 kg                    |
| NUMBER OF PERSONS       | 2                         |
| CLIMBING SPEED          | 8 – 9 m/min               |
| POWER SUPPLY            | 415V + EARTH/3PHASE/50Hz. |
| POWER CONSUMPTION       | 2.0 KW                    |
| ELECTRICAL SUPPLY CABLE | 4x1.5MM²,3PHASE +EARTH    |

counter weight calculation

n = Safety coefficient against overturning (recommended to be 2.5 or more if needed)  
G = Weight of counter weight in Kg.  
a = Front beam overhang in Meter.  
F = Total weight in kg of the platform, hoist, control box, safety brake, steel rope and permissible load  
b = Distance in meter between the front base and rear base

the permissible load should be adjusted according to the height, front beam overhang, distance between the front base and rear base and the variables.