



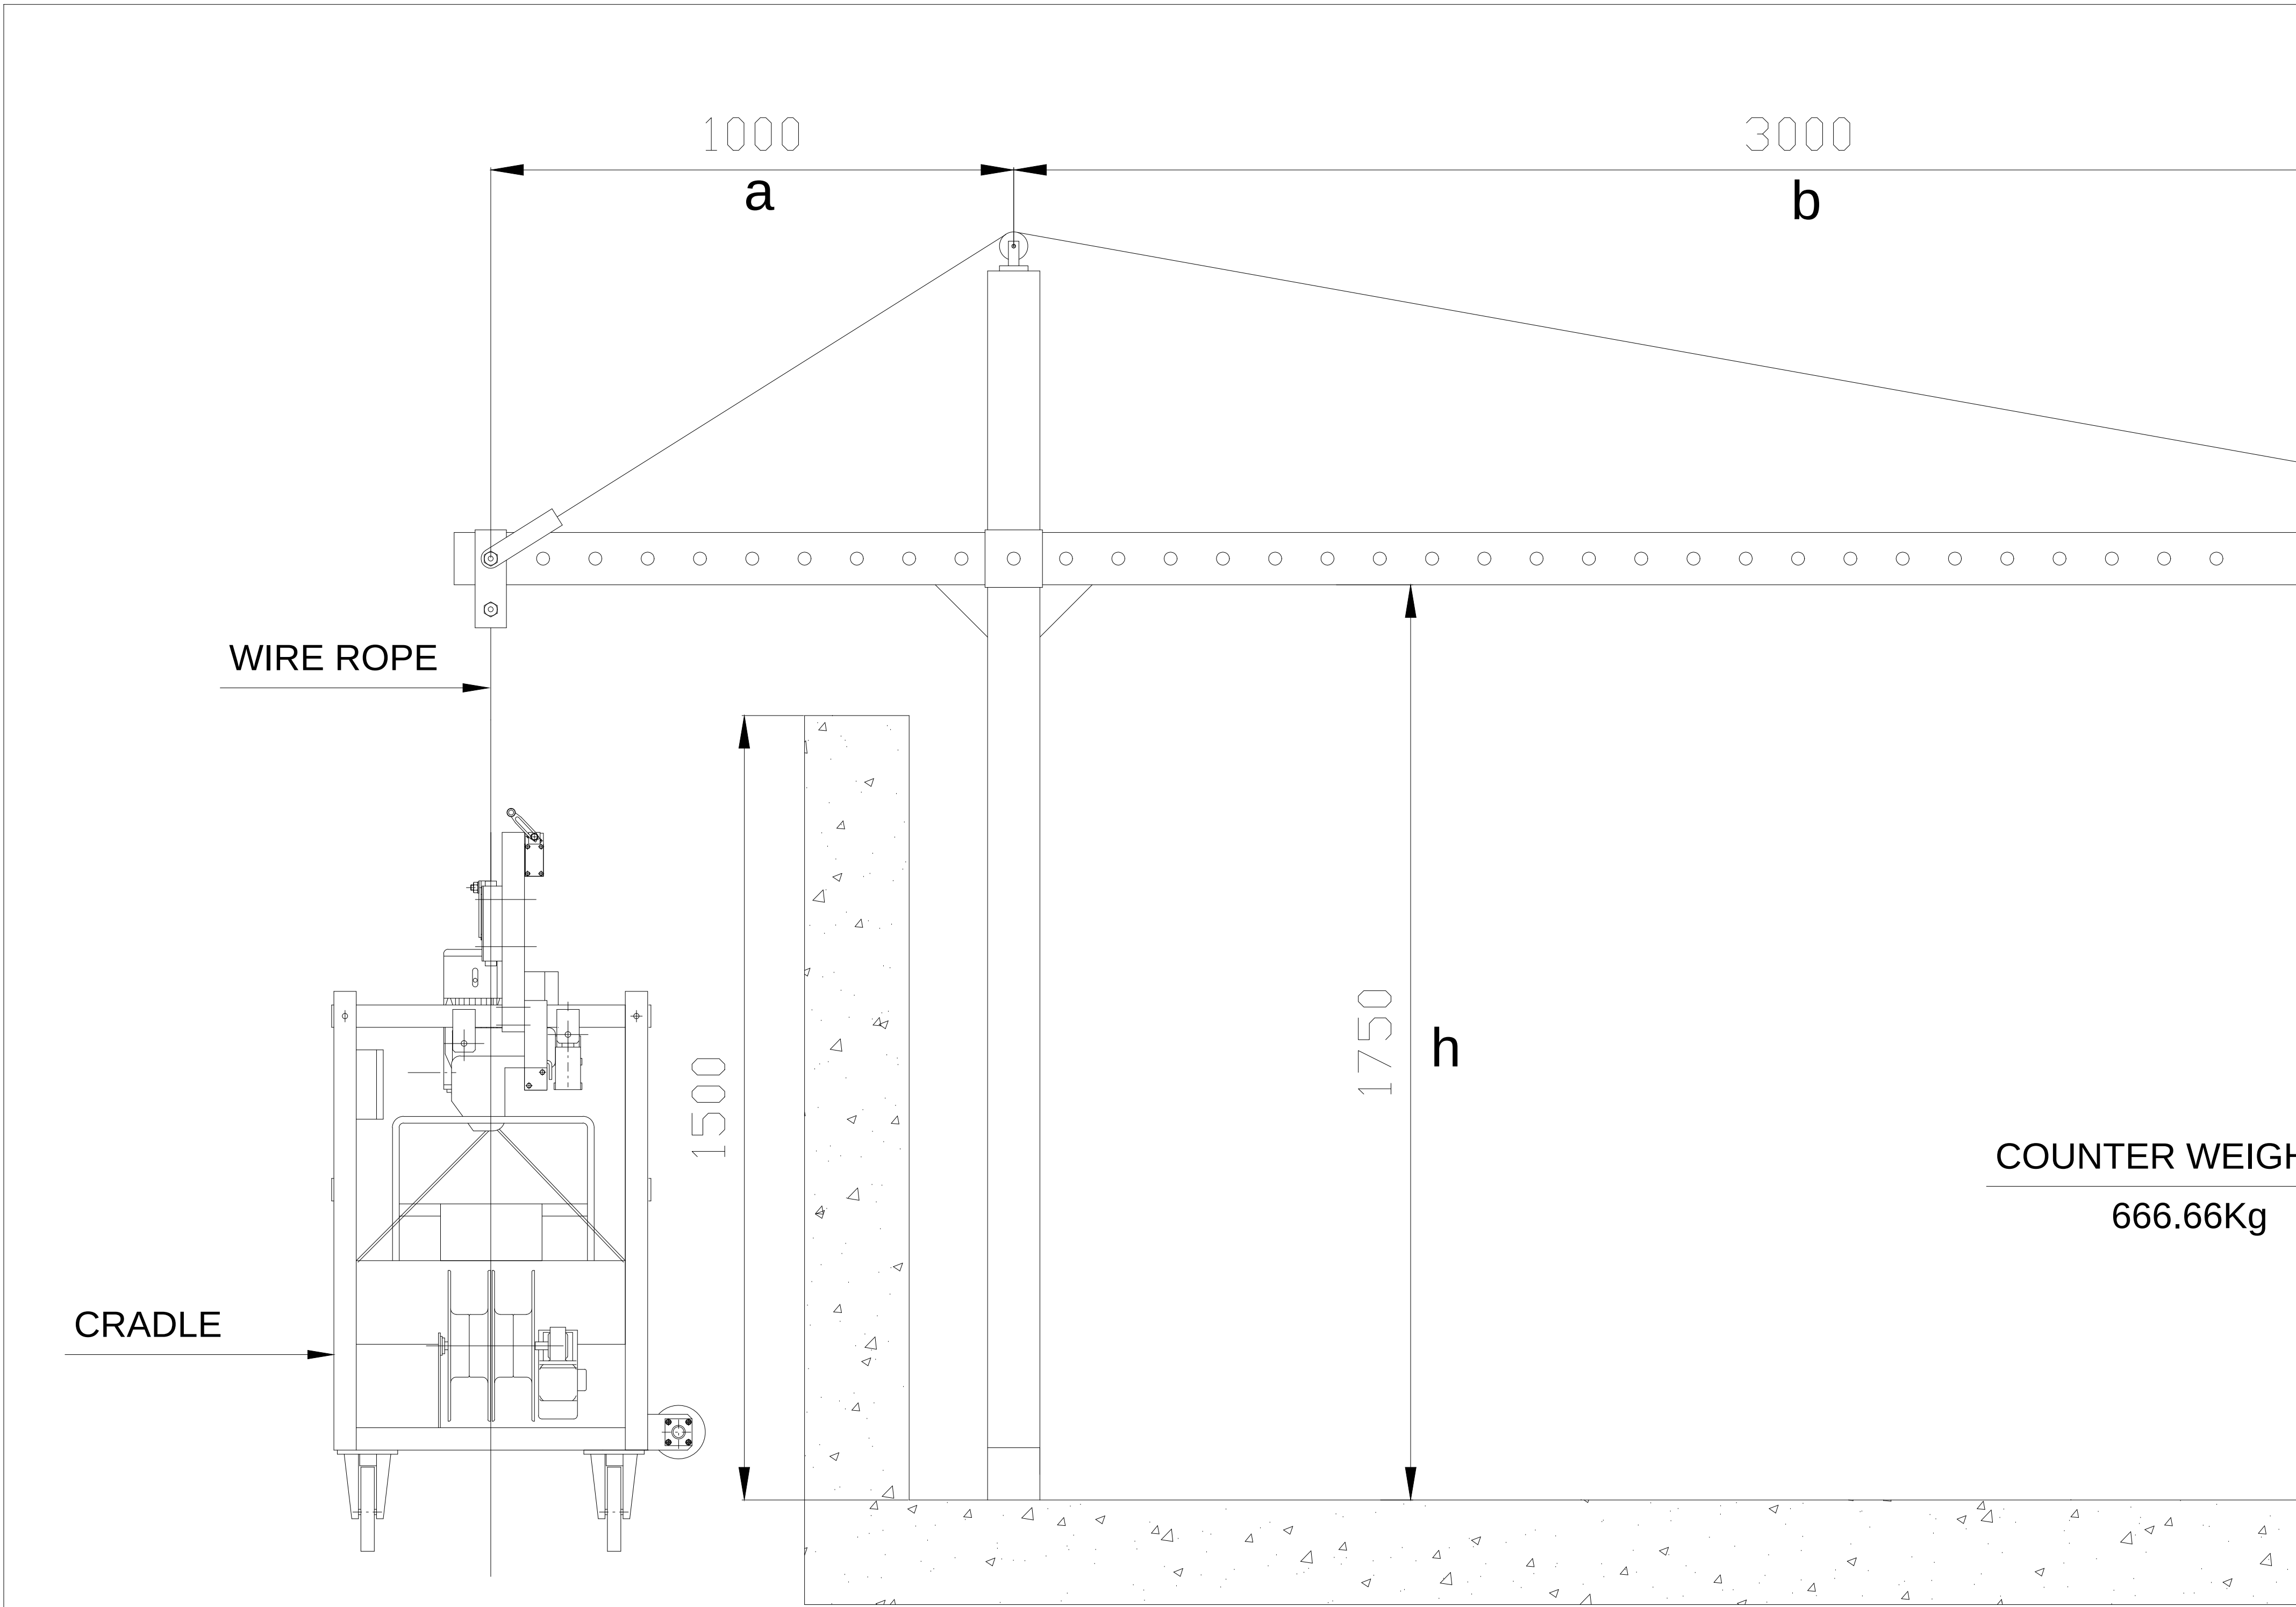

HANGING BASE DETAIL

Front beam Overhang a (mm)	Maximum Capacity W2 (kg)	b (mm) distance between front and rear support		Loaded Counter Weight		Ro < 1
		Steel Rope Length < 100m	Steel Rope Length < 200m	Weight G (kg)	Quantity (piece)	
700	800	> 3000	> 3400	1000	40	1
900	800	> 3600	> 4000	1000	40	1
1100	800	> 3600	> 4000	1000	40	1
1300	800	> 4000	> 4000	1000	40	1
1500	800	> 4000	> 4000	1200	48	1
1700	800	> 4000	> 4000	1400	56	1

REACTION LOADS TABLE

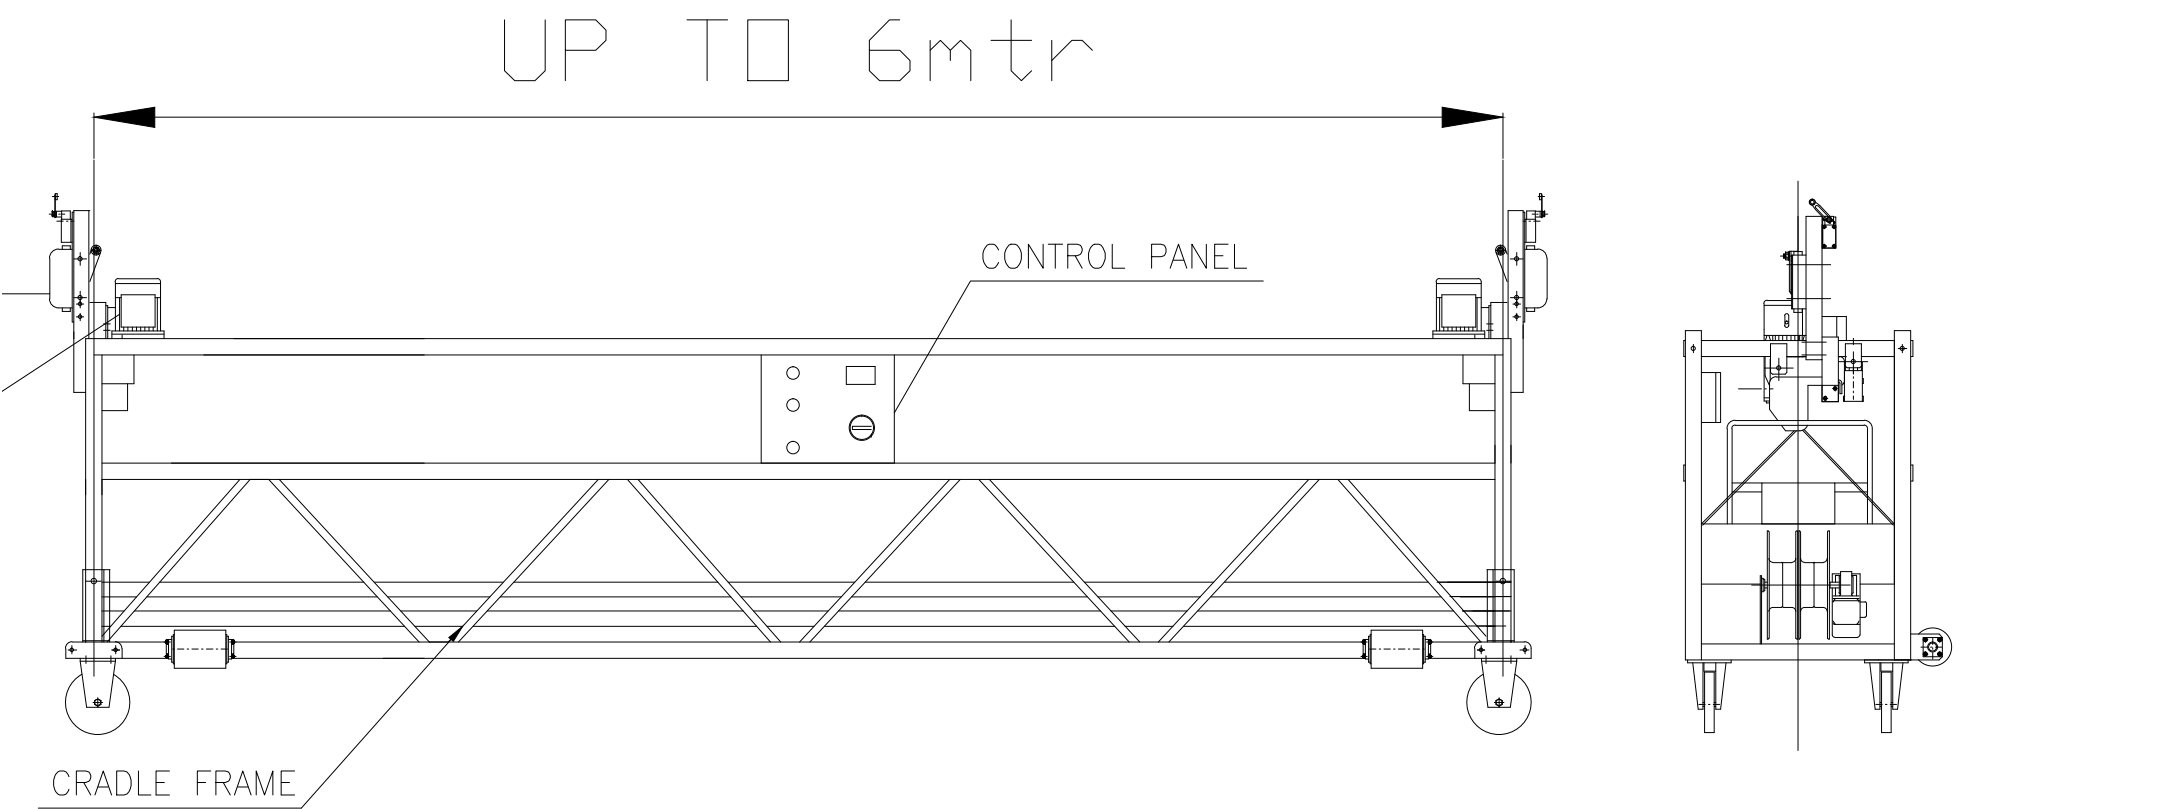

HOIST SPECIFICATION			ROPE SPECIFICATION				
1.	RATED LIFTING FORCE	630KG	1.	RATED BREAKING STRAIN	53KN		
2.	HOIST MASS	40KG	2.	DIAMETER	8.3MM		
3.	RATED LIFTING SPEED	9.3M/MIN	3.	RATED STRENGTH	1960 MPa		
4.	MOTOR	1.0KW,380V AC, 3C+E	USE ONLY ROPE AS DESIGNED BY HOIST MANUFACTURE				
5.	MOTOR BRAKE TORQUE	15.2 NM					
6.	MOTOR BRAKE VOLTAGE	99VDC					
CRADLE SPECIFICATIONS							
ER SUSPENSION RIG/DAVIT/NEEDLE		SAFE WORKING LOAD (SWL)	240 kg				
ION.		NUMBER OF PERSONS	2				
LVANISED STEEL		CLIMBING SPEED	8 – 9 m/min				
ED ALUMINUM		POWER SUPPLY	415V + EARTH/3PHASE/50Hz.				
ER PLATE		POWER CONSUMPTION	2.0 KW				
INTO SECOND ROPE SHOULD		ELECTRICAL SUPPLY CABLE	4x1.5MM²,3PHASE +EARTH				
IMARY HOIST ROPE							
EELERS ON BOARD							
IT							

counter weight calculation

cient against overturning (recommended to be 2.5 or more if needed)
unter weight in Kg.
overhang in Meter.
in kg of the platform, hoist, control box, safety brake, steel rope
ible load
meter between the front base and rear base

oad should be adjusted according to the height, front beam overhang,
n the front base and rear base and the variables.



3161, AJMAN, U.A.E.
6 7433480 Fax: +971 6 7480316