



ON: 1.2V , OFF: 0V

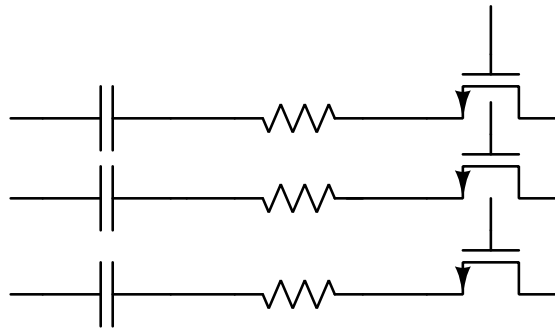


Miller compensation capacitive
DAC

ON: 1.6V , OFF: 0V

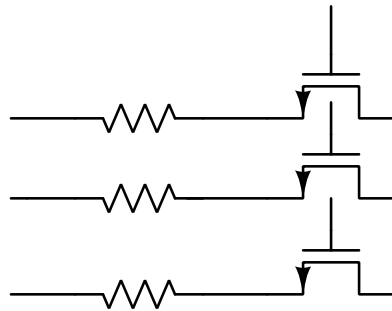

Second stage resistive feedback
DAC

ON: 0.4V , OFF: 1.6V

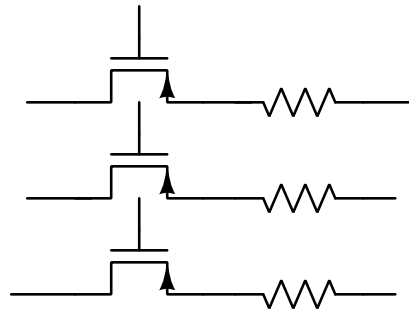

LNA Resistive DAC