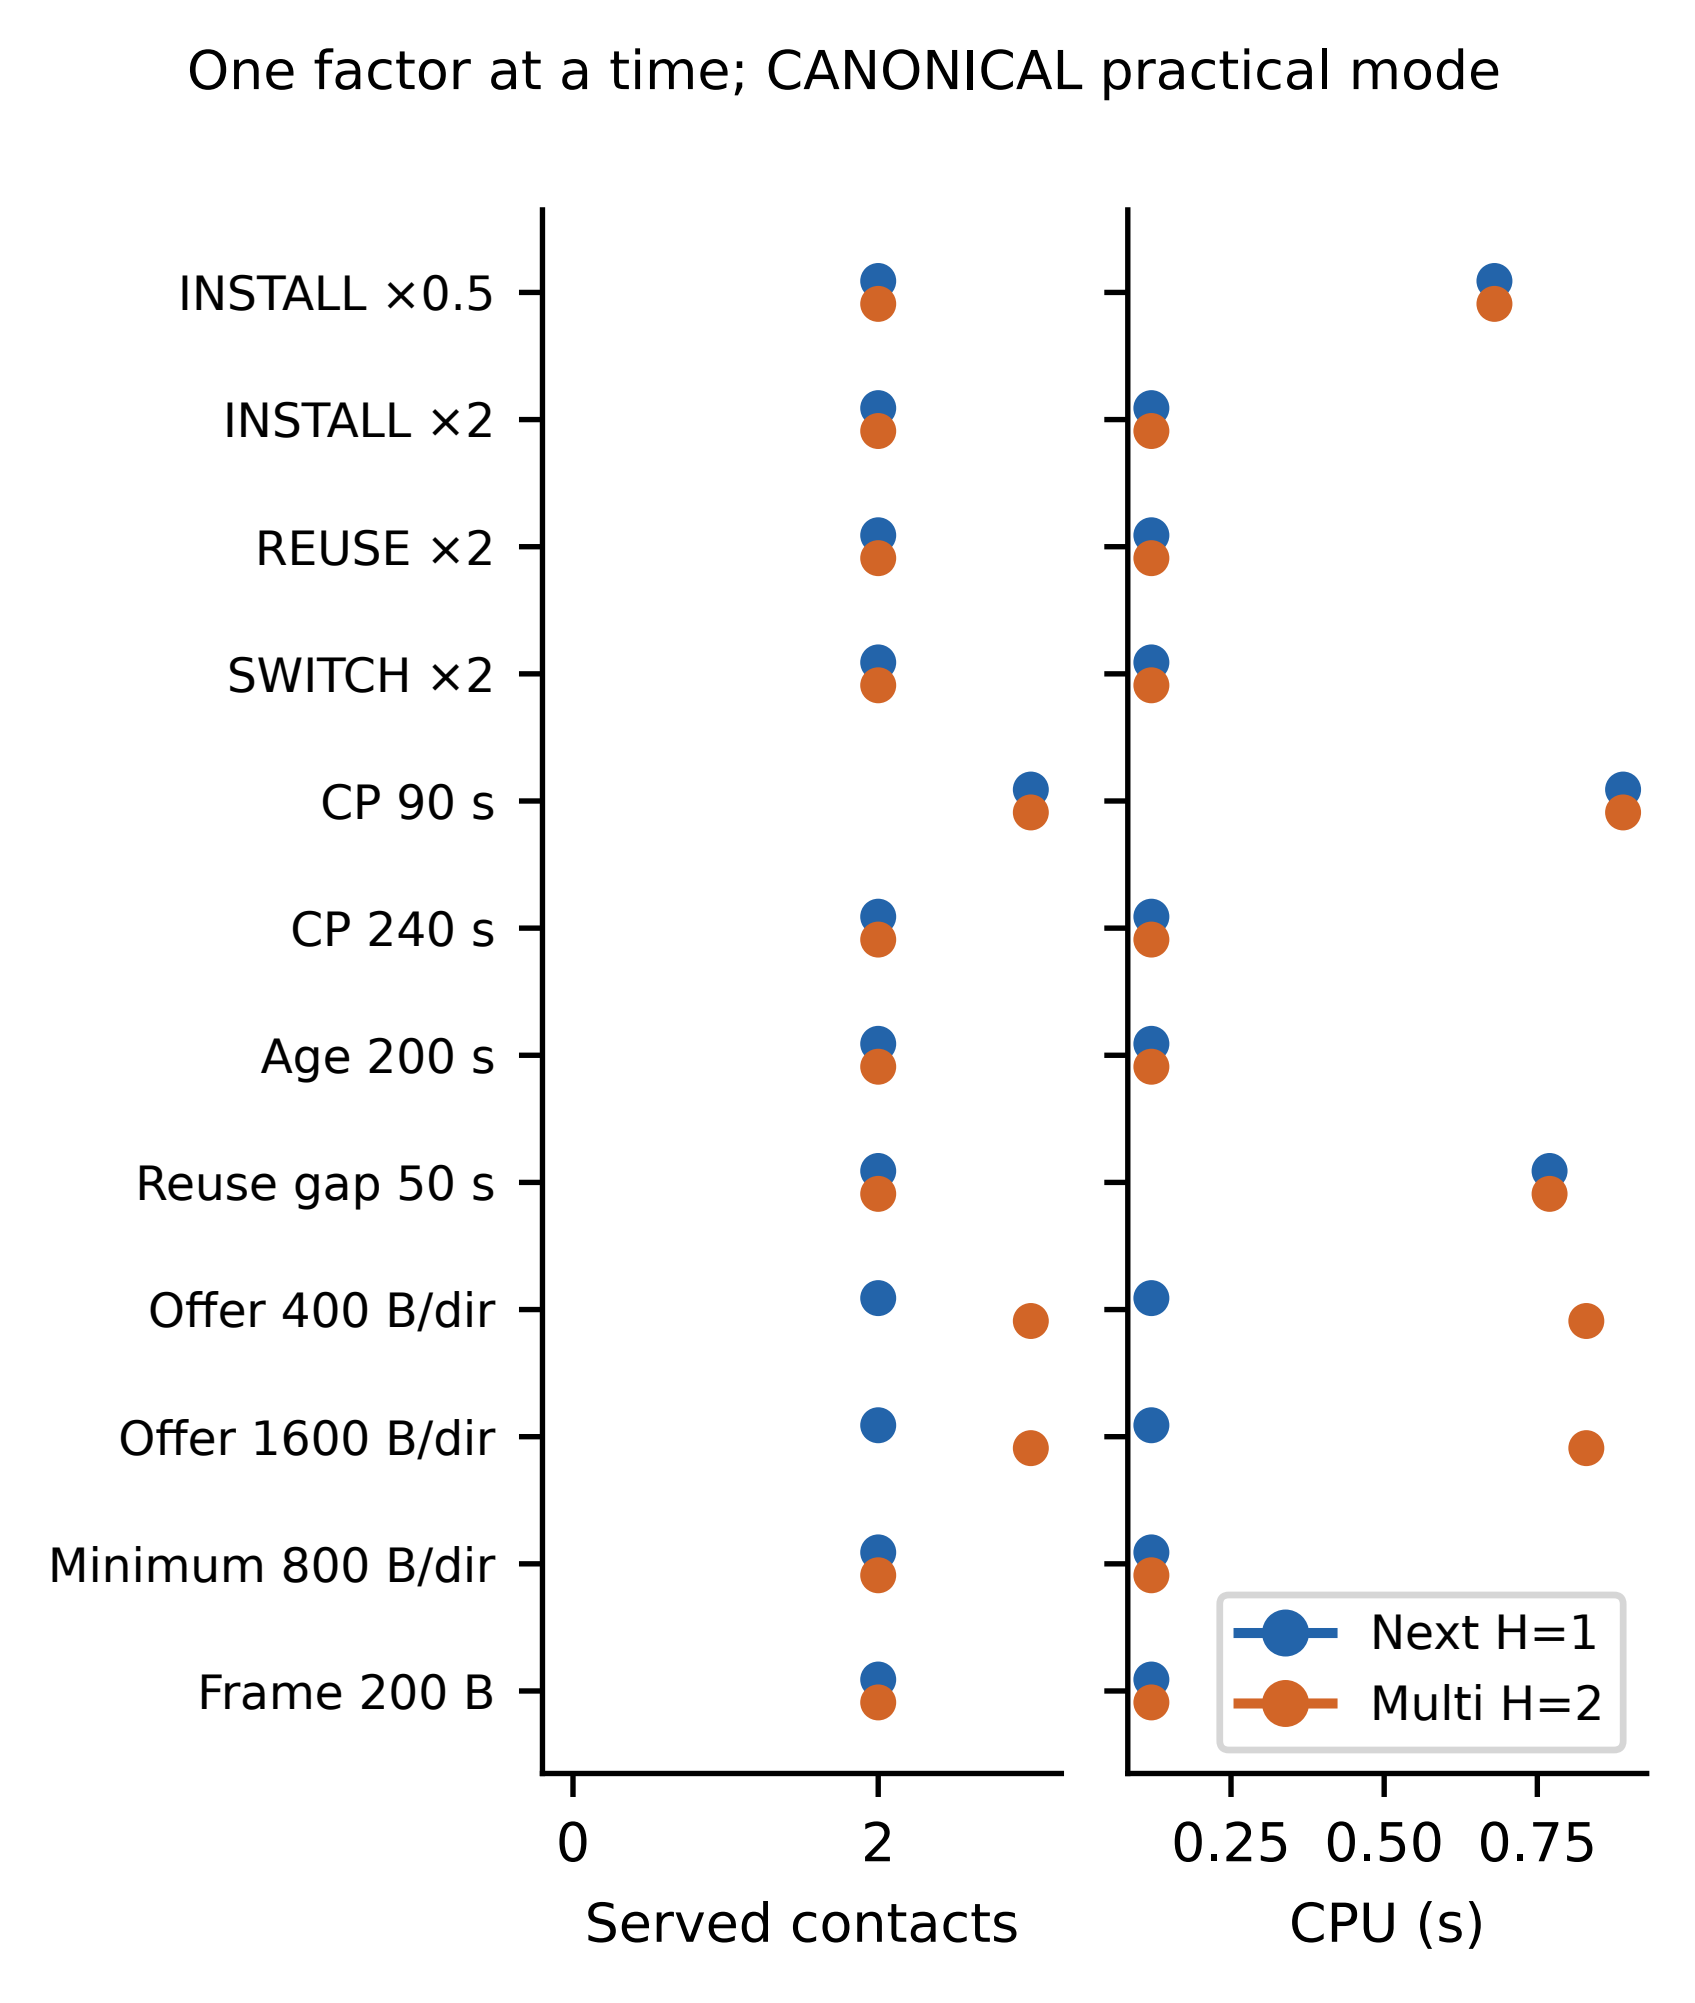
One factor at a time; CANONICAL practical mode
INSTALL ×0.5
INSTALL ×2
REUSE ×2
SWITCH ×2
CP 90 s
CP 240 s
Age 200 s
Reuse gap 50 s
Offer 400 B/dir
Offer 1600 B/dir
Minimum 800 B/dir
Frame 200 B
Next H=1
Multi H=2
0
2
Served contacts
0.25
0.50
0.75
CPU (s)