

# Improved Global Routing By Using A Star Algorithm

Abdulrahman Khalid\*, Hossam Ahmed<sup>†</sup>, Mahmoud Mohamed<sup>‡</sup> and Muhanad Atef<sup>§</sup>

Computer Engineering Dept., Faculty of Engineering, Cairo University

Cairo, Egypt

\*abdulrahman.elshafei98@gmail.com, <sup>†</sup>hossamahmed201515@gmail.com, <sup>‡</sup>mmmacmp@gmail.com, <sup>§</sup>muhanad.atef23@gmail.com

**Abstract**—In this paper VLSI routing is improved by improving global routing, this can be done by using A-Star with heuristic cost function that has parameters which affect the time taken by the router on changing instead of Dijkstra's algorithm in finding path, which will reduce time taken in this process and achieve the minimum wirelength, many comparisons are taken in this paper with different algorithms to find the optimum algorithm to be used to achieve both minimum wirelength and minimum time taken. From the comparisons of the paper we can find that using any algorithm is a trade off as when time taken is decreased, the wirelength is increased and vice versa, so there is no algorithm which is better from the other algorithms in general but using A-Star algorithm with the heuristic function in finding path is a good approach to be used in global routing as it decreases the routing time and achieve the minimum wirelength.

**Index Terms**—VLSI Routing, Global Routing, Routing Algorithms, Fast Global Routing, Fast Routing Algorithms, Routing Algorithms Comparisons.

## I. INTRODUCTION

Routing is critical step in physical design process. Until now the optimum solution for VLSI routing has not been achieved yet, so it is considered as a very interesting challenging field. It is exactly done in two steps, global routing and detailed routing. At first global routing is run which is the responsible for making an approximate routing for the whole circuit in order to be used as a guide for detailed routing, then the detailed routing is run to make the exact routing for the system. That means if global or detailed routing is improved the whole routing process is improved, but there are many problems that have to be overcome to make a correct routing process. First of all the scale has to be taken into consideration, as millions of wires exist in a small chip area which means that many kilometers of wires are placed in a very small area, so the total wirelength has to be minimized as much as possible, also it is known that as the wirelength increases the resistance increases as well which means more delay in the chip. There is another problem as circuits are made in nano-scale which means that its geometric will be complex. Another problem is that routing algorithm have to be applicable for more than one layer with different costs. The direction of wires also have to be taken into consideration as the direction of wires in every layer can be either vertical or horizontal and no diagonal paths, then to go from source 'S' to target 'T' the path taken should be in (vertical — horizontal) directions that specified by the layer

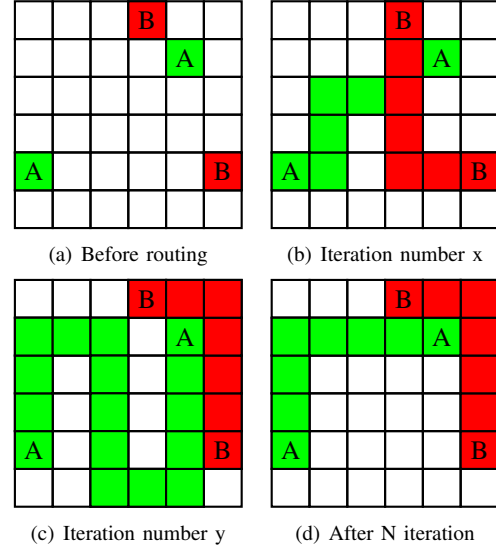


Fig. 1. Finding path in global routing

(at each layer wires are placed in one direction only), then there is another problem as when a wire goes from layer to another to continue on the perpendicular direction it have to go through via which have a high resistance. DFM (design for manufacturer) rules also has to be achieved. All of these constraints must be taken into consideration with the global routing to achieve hundred percent of the circuit connections, that means global routing will take a lot of time to achieve all these constraints, and here is the challenge to achieve all the routing specifications with minimum time taken.

Figure 1 shows a very simple approach of how the global router works. At (a) the source and target of both (A,B) need to be connected ignoring obstacles, nevertheless we can observe that the global router have to iterate to get the best routing paths, at (b) (B,B) connected but there is no way to connect (A,A) as when (B,B) connected together they blocked the way for (A,A) to be connected, after some iterations we can find the figure at (c) in which (A,A) and (B,B) connected correctly, but there is a problem, the (A,A) connection is not the optimal path as there are paths which achieve less wirelength, so the global router have to iterate until reaching the optimal path. These iterations are done for only two connections in one layer

without obstacles, then how about millions of wires in VLSI? this shows how much the global routing algorithm has to be very fast in order to connect this huge number of wires as fast as possible.

Those procedures are repeated for all the generated queues until all processes reach the lowest priority queue where they are rescheduled until their completion.

## II. RELATED WORK


Several papers proposed various types of approaches to improve the routing process, each of them tried to improve the overall routing by improving one or more parameters, some papers tried to decrease number of vias, other papers tried to decrease the time taken and so on. In [2] they used two bounded length maze algorithms as finding path algorithms in order to make the router faster, the first one is optimal-BLMR which is used to get the minimum cost paths to be used as a routing paths, this can be done in three steps, first BLC (bounded length constraint) is defined as greater than Manhattan distance then to go from source to target the neighbour points are tested if it can be a part of path or not, each point that violates the BLC constraint is discarded, second

## III. PROPOSED APPROACH

For a multilevel feedback queue scheduling algorithm, three parameters are considered. The first is the chosen scheduling algorithm for each queue, especially the last queue as its scheduling algorithm is expected to treat starvation. The second is the criteria according to which a process is promoted, this technique is also known as Aging. The third is the criteria according to which a process is demoted. In our proposed algorithm, there are 5 queues sorted in ascending order in line with their priority number, 1 being the highest priority and 5 being the lowest. Each queue uses a modified version of the round-robin scheduling algorithm stated in b3. In b3, processes are sorted in ascending order according to their burst time and are assigned a time quantum that equals the median burst time of those processes. This algorithm provides better turnaround time and waiting time than the standard static quantum RR algorithm whose quantum, if set too short, leads to many context switches and, if set too long, morphs the algorithm into an FCFS algorithm. The proposed alteration on the stated algorithm in b3 is that each queue quantum time equals the median burst time multiplied by a factor matching the queue number. Hence, the gradual increase of quantum time as priority decreases. For clarification, a queue with priority equal 2 has the following processes denoted by their burst time: 100, 300, 550, 600, 620, 700, 720, 900 and 1200, the median value is 620, since we are in a queue whose priority equals 2, therefore the quantum slice value according to the proposed approach equals 1240 as in  $620 * 2$ . If processes of a certain queue didn't terminate after assigning the quantum time value, they are shifted to the next lower priority queue. After introducing new processes into a queue, the quantum time slice is recalculated. Processes age whenever they are in a queue whose priority is one less than that currently getting scheduled and satisfies the following inequality:

$$\frac{\text{waiting time of } P}{\text{burst time of } P} \geq 1 \quad (1)$$

### A. Pseudocode Flowchart of the Proposed Approach

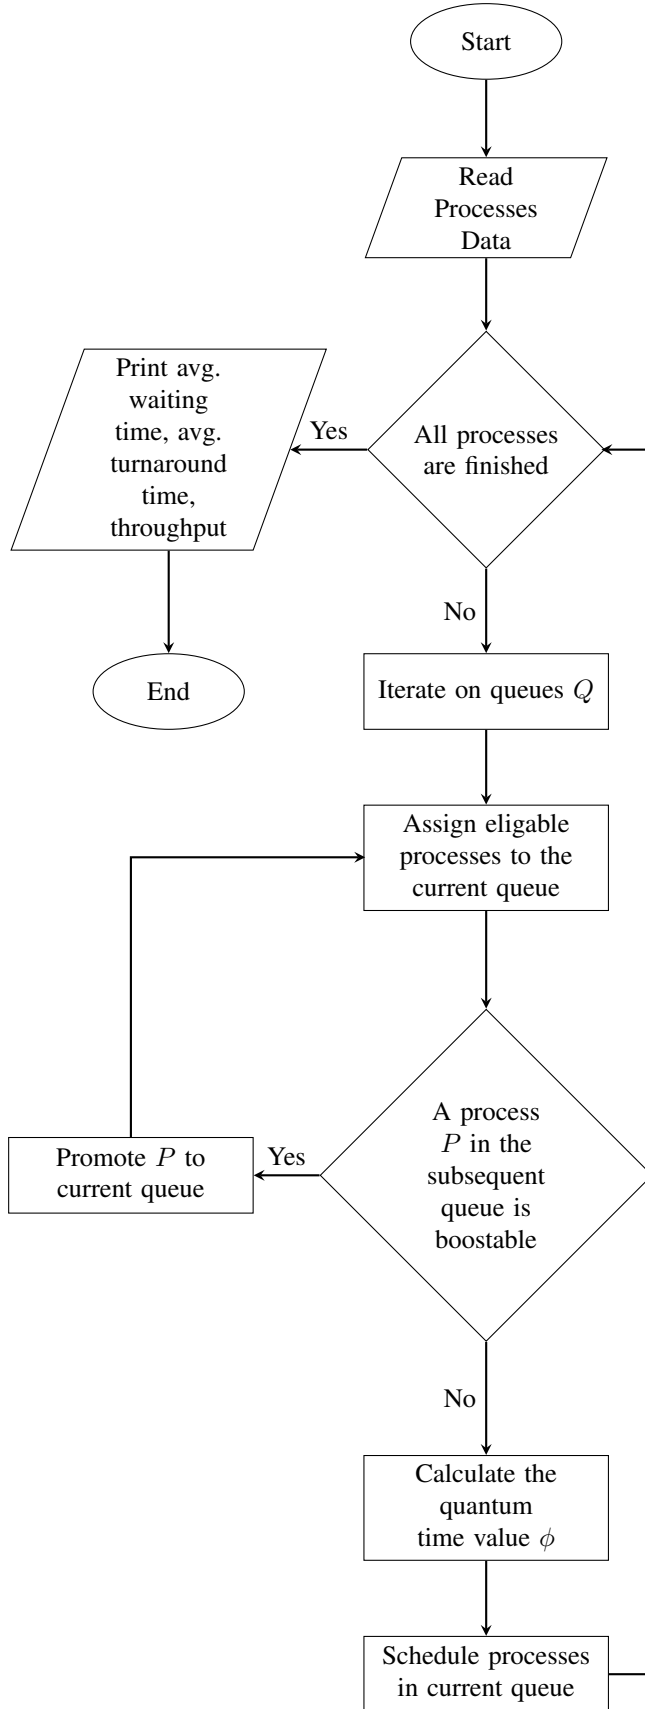

### B. Proposed Algorithm

**Algorithm 1** Developed Multilevel Feedback Queue Scheduling Algorithm

**Input:** Number of processes  $n$ , processes priority  $\alpha$   
burst time values  $\beta$ , arrival time values  $\sigma$ ,  
context switching cost  $\epsilon$

**Output:** Average turnaround time, average waiting time, throughput

1: **procedure** DMLFQ

Declaration and Initialisation:

2: Queue  $Q_i$  where  $i \in \{1, 2, 3, 4, 5\}$

3: Turnaround time values  $\tau$

4: Finish time values  $\lambda$

5: Waiting time values  $\theta$

6: Remaining time values  $\mu = \beta$

7: Quantum time value  $\phi$

8: Number of context switches  $\delta$

9:  $time = 0$

10: **while**  $\exists P \in Q$  **do**

11:   **for**  $i = 1$  to  $5$  **do**

12:     **for**  $j = 1$  to  $n$  **do**

13:       **if**  $\sigma_j \leq time$  and  $\alpha_j$  equals  $i$  **then**

14:          Assign  $P_j$  to  $Q_i$

15:       **end if**

16:        $waitingTime = time - \sigma_j$

17:       **if**  $i < 5$  and  $waitingTime/\mu_j \geq 1$  and  $\alpha_j$  equals  $i + 1$  and  $\sigma_j \leq time$  **then**

18:          Assign  $P_j$  to  $Q_i$

19:       **end if**

20:     **end for**

21:     Sort  $Q_i$  in ascending order according to remaining time values

22:      $\phi = \text{median value of } Q_i * i$

23:     **foreach**  $P_j \in Q_i$  **do**

24:       **if**  $\mu_j \leq \phi$  **then**

25:           $time = time + \mu_j$

26:           $\lambda_j = time$

27:          Remove  $P_j$  from  $Q_i$

28:       **else**

29:           $time = time + \phi$

30:           $\mu_j = \mu_j - \phi$

31:          **if**  $i < 5$  **then**

32:            $\alpha_j = \alpha_j + 1$

33:          **end if**

34:       **end if**

35:       **if** Previous process  $\neq P_j$  **then**

36:           $time = time + \epsilon$

37:           $\delta = \delta + 1$

38:       **end if**

39:     **end foreach**

40:   **end for**

41: **end while**

42: **for**  $i = 1$  to  $n$  **do**  $\tau_j = \lambda_j - \sigma_j$ ,  $\theta_j = \tau_j - \beta_j$

43: **end for**

44: **return** average of  $\theta$ , average of  $\tau$ ,  $n/time$

45: **end procedure**

#### IV. EXPERIMENTAL ANALYSIS

##### A. Assumptions

The proposed scheduling algorithm is software simulated using a Python script which simulates scheduling independent CPU-bound processes on a single processor environment which guarantees that no more than a single process is getting scheduled at any arbitrary moment. Each process is assumed to have its own predetermined burst time, arrival time and the queue to which each one belongs. The proposed approach is non-preemptive. For the sake of giving an example, if a process was lately introduced to a queue denoted by  $Q_i$  prior to the current queue getting scheduled, it won't get scheduled until the current queue, its subsequent queues and the queues prior to  $Q_i$  get scheduled.

##### B. Experimental Scheme

On one hand, the input arguments to the proposed algorithm implementation are the number of processes to be scheduled, their burst time, their arrival time and the queue where each one belongs. On the other hand, output parameters are the average waiting time, average turnaround time and throughput. The following equations are used to calculate the previously mentioned output parameters:

$$\text{Average Waiting Time} = \frac{\text{Total Waiting Time}}{\text{Number of Processes}} \quad (2)$$

$$\text{Average Turnaround Time} = \frac{\text{Total Turnaround Time}}{\text{Number of Processes}} \quad (3)$$

$$\text{Throughput} = \frac{\text{Number of Executed Processes}}{\text{Total Execution Time}} \quad (4)$$

##### C. Performance Metrics

As a means to have a concrete, viable evaluation of either the proposed algorithm or any other scheduling algorithm, the output parameters are taken into consideration for analysis. Since the average waiting time indicates the average time that a process had to starve for, therefore the lower the average waiting time is the better. The same principle applies to the average turnaround time and the number of context switches, as the former implies the average time spent by the process since its arrival time to its completion and the latter costs time as the CPU is assigned back and forth between different processes. Contrarily to the prior metrics, the larger the throughput is the better as it indicates the number of processes that are completely executed per unit time.

##### D. Simulation

For the sake of showcasing the proposed algorithm, a number of processes, their predetermined burst time values and their arrival time values are taken as input to the Python simulation script. Suppose that the input to the script is according to the following table:

TABLE I

Process	Arrival Time	Burst Time	Queue
1	0	60	1
2	0	50	1
3	0	40	2
4	0	30	2
5	0	10	3
6	0	210	3
7	0	200	3

According to the proposed algorithm, the time quanta calculated are as follows:

TABLE II

Queue	Quantum Value
1	55
2	40
3	615
4	0
5	0

All processes are sorted in ascending order according to their remaining time and are scheduled by assigning the time quantum calculated for their respective queue. The time spent scheduling a particular queue is the waiting time for its subsequent queues.

The scheduling process goes as follows:




Fig. 2.  $Q_1$  Gantt Chart

Considering that each process in  $Q_1$  is assigned a quantum value of 50, as we reach the last process in  $Q_1$ , the total time elapsed equals 105, which happens to be the time that all the other processes in the subsequent queues had to wait for, hence the addition of their waiting time by a value of 105 units of time.




Fig. 3.  $Q_2$  Gantt Chart

Even though  $P_5$  is initially assigned to  $Q_3$  as in Table I, it was promoted to  $Q_2$  due to satisfying inequality (1).




Fig. 4.  $Q_3$  Gantt Chart

Whenever processes reach the lowest queue precompletion, they are scheduled using the RR scheduling algorithm with a relatively large quantum time value which is in most cases similar to using the FCFS algorithm because, as the time quantum value of an RR algorithm tends to infinity which could practically be a very large number relative to the available processes remaining time values, the algorithm tends to morph into the FCFS algorithm. This procedure is iterated until all the processes are finished. Simulation results are shown in the table below:

TABLE III

Avg. Turnaround Time	Avg. Waiting Time	Throughput
230	144.3	0.011667

#### E. Performance Comparisons

To assess the performance of the proposed algorithm implementation, multiple test cases are addressed and analyzed in seven different experiments. In each experiment, the output of the proposed algorithm implementation is compared to the output of another scheduling algorithm implementation addressed in a different paper, such as standard MLFQ algorithm with static quantum RR and other variants of MLFQ algorithms and RR algorithms.

1) *Experiment 1:* In this experiment, the proposed algorithm is compared against two MLFQ algorithm variants stated in b4. The first uses a static version of the RR algorithm for scheduling each queue, while the second variant uses a dynamic version of the RR algorithm for doing so.

TABLE IV  
EXPERIMENT 1 INPUT

Process	Arrival Time	Burst Time	Queue
1	1	25	1
2	5	70	1
3	6	84	1
4	7	17	1
5	8	35	1

TABLE V  
EXPERIMENT 1 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	115	68.8
Dynamic RR MLFQ	150.8	107.6
Static RR MLFQ	161.4	116.2

2) *Experiment 2:* In this experiment, the proposed algorithm is compared against two MLFQ algorithm variants stated in b4. The first uses a static version of the SJFRR algorithm for scheduling each queue, while the second variant uses a dynamic version of the SJFRR algorithm for doing so.

TABLE VI  
EXPERIMENT 2 INPUT

Process	Arrival Time	Burst Time	Queue
1	1	25	1
2	5	70	1
3	6	84	1
4	7	17	1
5	8	35	1

TABLE VII  
EXPERIMENT 2 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	115	68.8
Dyn. SJFRR MLFQ	134	91.8
Stat. SJFRRMLFQ	143.4	98.2

3) *Experiment 3:* In this experiment, the proposed algorithm is compared against two MLFQ algorithm variants stated in b5. The first uses a static version of the SJFRR algorithm for scheduling each queue, while the second variant uses a dynamic version of the SJFRR algorithm for doing so.

TABLE VIII  
EXPERIMENT 3 INPUT

Process	Arrival Time	Burst Time	Queue
1	0	8	1
2	3	133	3
3	2	21	2
4	8	39	2
5	19	67	2
6	33	114	3
7	33	54	2

TABLE IX  
EXPERIMENT 3 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	151	88.7
Dyn. SJFRR MLFQ	252	119
Stat. SJFRR MLFQ	351	228

4) *Experiment 4:* In this experiment, the proposed algorithm is compared against multiple variants of the MLFQ

algorithm that are stated in b6: standard MLFQ algorithm, a priority-based MLFQ algorithm and a vague logic-based MLFQ algorithm.

TABLE X  
EXPERIMENT 4 INPUT

Process	Arrival Time	Burst Time	Queue
1	0	40	1
2	0	30	1
3	0	50	1
4	2	70	1
5	4	25	1
6	6	60	1
7	7	45	1

TABLE XI  
EXPERIMENT 4 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	185.85	140.14
VMLFQ	190	170
MLFQ	232.14	175
PMLFQ	240	180

5) *Experiment 5*: This experiment is the same as the previous one, but with a different input test case.

TABLE XII  
EXPERIMENT 5 INPUT

Process	Arrival Time	Burst Time	Queue
1	0	90	1
2	0	30	1
3	0	28	1
4	0	57	1
5	0	73	1
6	0	19	1
7	0	42	1
8	0	67	1

TABLE XIII  
EXPERIMENT 5 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	212.5	161.75
VMLFQ	260	225
MLFQ	290	240
PMLFQ	300	245

6) *Experiment 6*: In this experiment, the proposed algorithm is compared against two variants of the RR algorithm stated in b3. The first is a static version of the RR algorithm with a constant quantum value of 25 for scheduling each queue while the second uses a dynamic version of the RR algorithm called SRBRR for doing so.

TABLE XIV  
EXPERIMENT 6 INPUT

Process	Arrival Time	Burst Time	Queue
1	0	13	1
2	0	35	1
3	0	46	1
4	0	63	1
5	0	97	1

TABLE XV  
EXPERIMENT 6 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Proposed Algorithm	113.2	62.4
Dynamic SRBRR	122.4	71.6
Static RR	148.2	97.4

7) *Experiment 7*: This experiment is the same as the previous one, but with a different input test case. Note that for this test case, a process queue number is irrelevant to both the RR algorithm and the SRBRR algorithm mentioned in b3.

TABLE XVI  
EXPERIMENT 7 INPUT

Process	Arrival Time	Burst Time	Queue
1	0	54	1
2	0	99	3
3	0	5	2
4	0	27	2
5	0	32	2

TABLE XVII  
EXPERIMENT 7 RESULTS

Algorithm	Avg. Turnaround Time	Avg. Waiting Time
Dynamic SRBRR	93.6	50.2
Proposed Algorithm	106.8	63.4
Static RR	152.2	108.8

## F. Observation

From the above simulations of different test cases and multiple performance comparisons that involved as many as 11 different scheduling algorithms not including this paper

algorithm, it is clear that the average turnaround time and the average waiting time of the proposed algorithm is less than or – in few occasions – nearly equal to those of the stated algorithms. With that said, the proposed algorithm is arguably advantageous over those algorithms, considering even the case in which it underperformed compared to the SRBRR algorithm, it is still favourable due to the capability to separate processes into categories based on their need for the processor and other advantages of the MLFQ algorithm. The performance of the proposed algorithm compared to other algorithms is further illustrated in the following graphs:

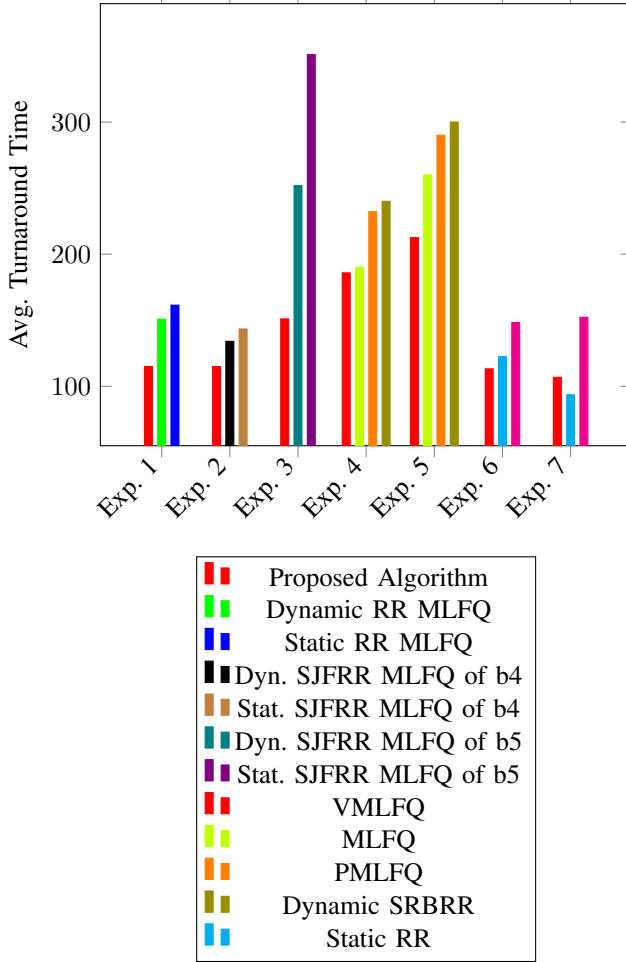


Fig. 5. Comparison graph for average turnaround time

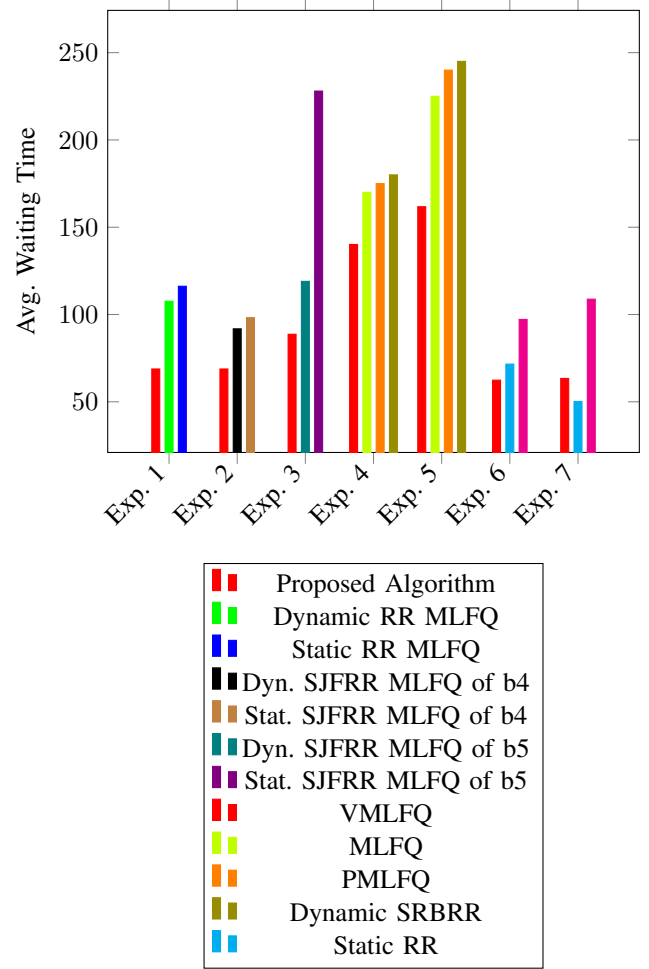


Fig. 6. Comparison graph for average waiting time

## V. CONCLUSION AND FUTURE WORK

The goal of this paper is to tackle different shortcomings associated with the standard MLFQ scheduling algorithm as well as its variants discussed in several papers. To resolve these deficiencies, we introduced different adjustable policies and techniques. It is evidently clear that those methods yield better CPU performance and optimize utilization by reducing the average waiting time as well as the average turnaround time. Despite experimenting numerous combinations of the parameters and scheduling policies by which the proposed MLFQ algorithm operates, we can say that there is yet a large room for experiment and improvement through finding better methods and policies which would make the algorithm more adaptable to the nature of the submitted processes and overall more enhanced. For instance, adjusting the criteria by which the scheduler decides whether to promote a process might further lessen starvation. Making the proposed algorithm preemptive might also aid mitigating starvation and render overall better performance. The possibilities are limitless.

## REFERENCES

- [1] Muhammet Mustafa Ozdal and M. D. F. Wong, "Archer: a history-driven global routing algorithm," *2007 IEEE/ACM International Conference*

on *Computer-Aided Design*, San Jose, CA, 2007, pp. 488-495, doi: 10.1109/ICCAD.2007.4397312.

- [2] Liu, Wen-Hao, et al. "NCTU-GR 2.0: Multithreaded collision-aware global routing with bounded-length maze routing." *IEEE Transactions on computer-aided design of integrated circuits and systems* 32.5 (2013): 709-722.