





FRONT

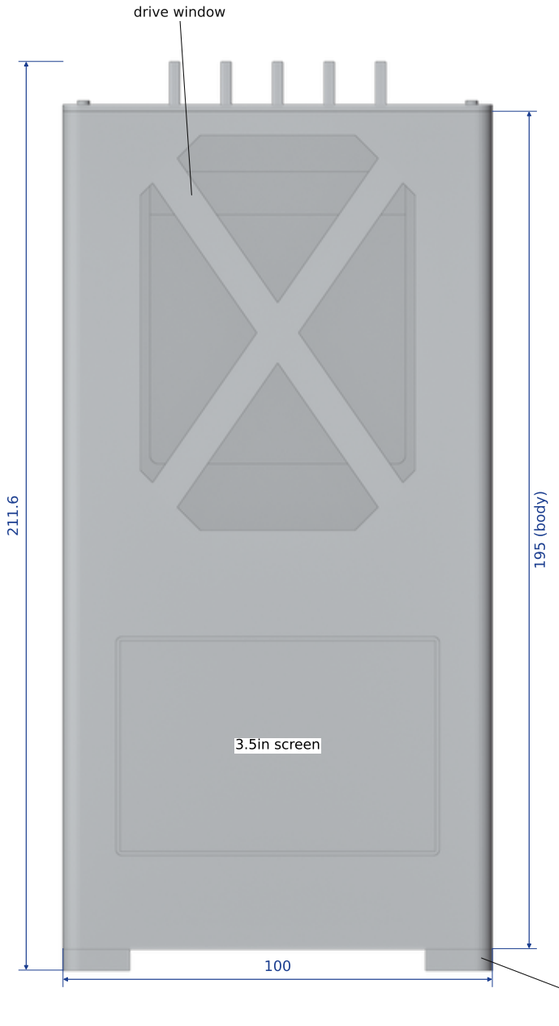

RIGHT

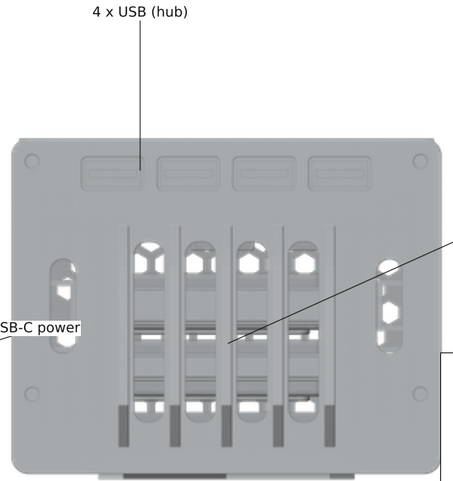

TOP

NOTES


1. Overall 100 W x 78 D x 211.6 H (legs 5 + body 195 + crown 11.6).
2. Parts: A body, B back door (Pi mount), C crown, D 4 corner legs.
3. Front: 3.5in screen (base) and X-braced drive window.
4. Right side: USB-C power, 12 V lead, debossed logo.
5. Top: 4 USB ports of the internal hub, exhaust slots.
6. Back: hex vents, Ethernet exit, 4 x M3 door screws.

IP NAS ENCLOSURE v6d


2026-10-17

GENERAL ARRANGEMENT (assembled)


4 printed parts + bought parts (Pi 5, 2 HDD, 3.5in screen, USB hub)	Sheet 1 / 5
Material: PLA black, total 156.4 g (slicer)	Scale 1:1.43, A3, mm

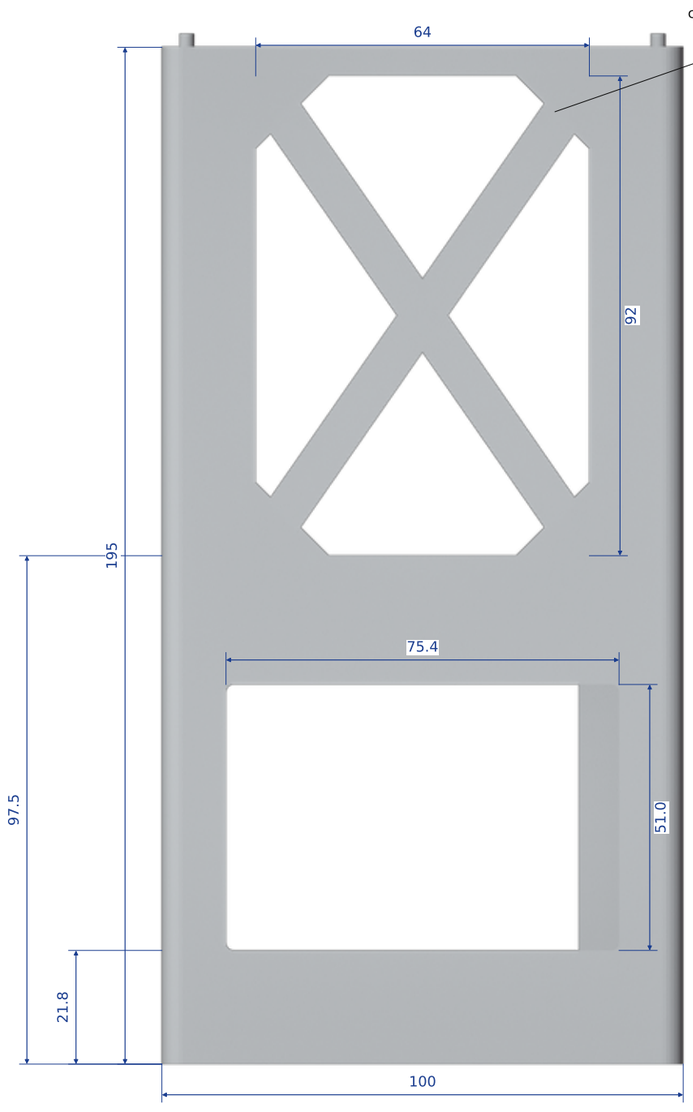

FRONT

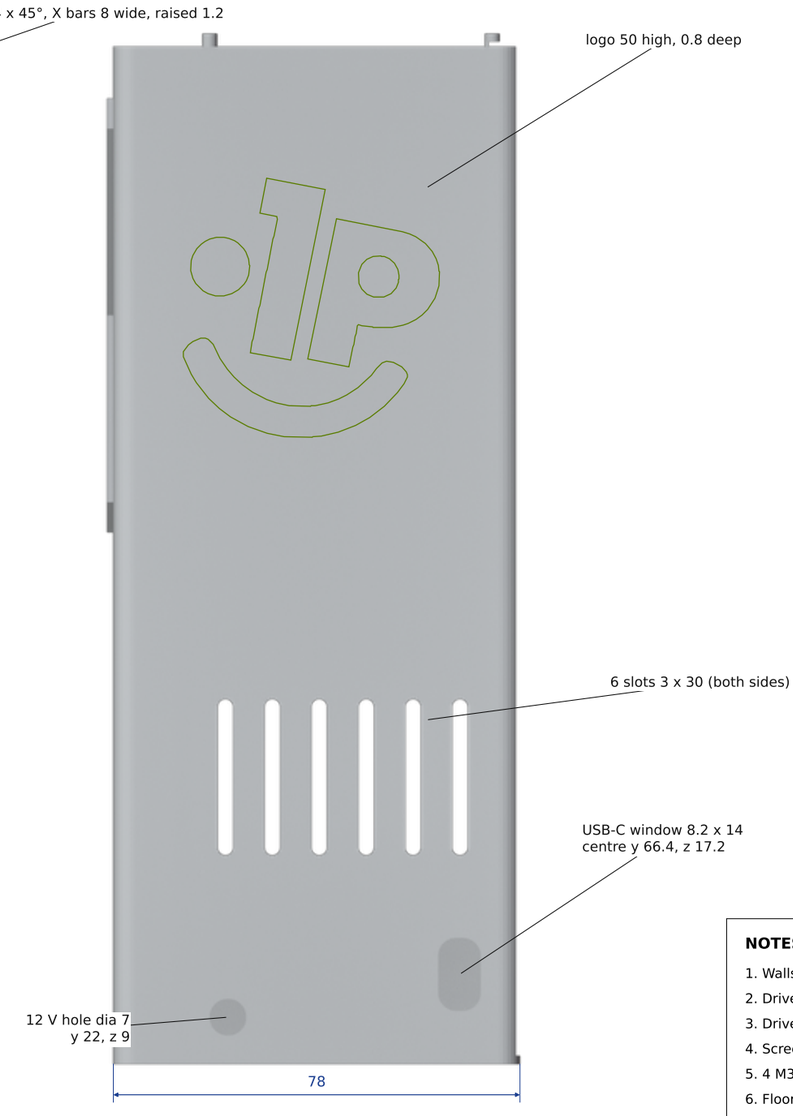

RIGHT

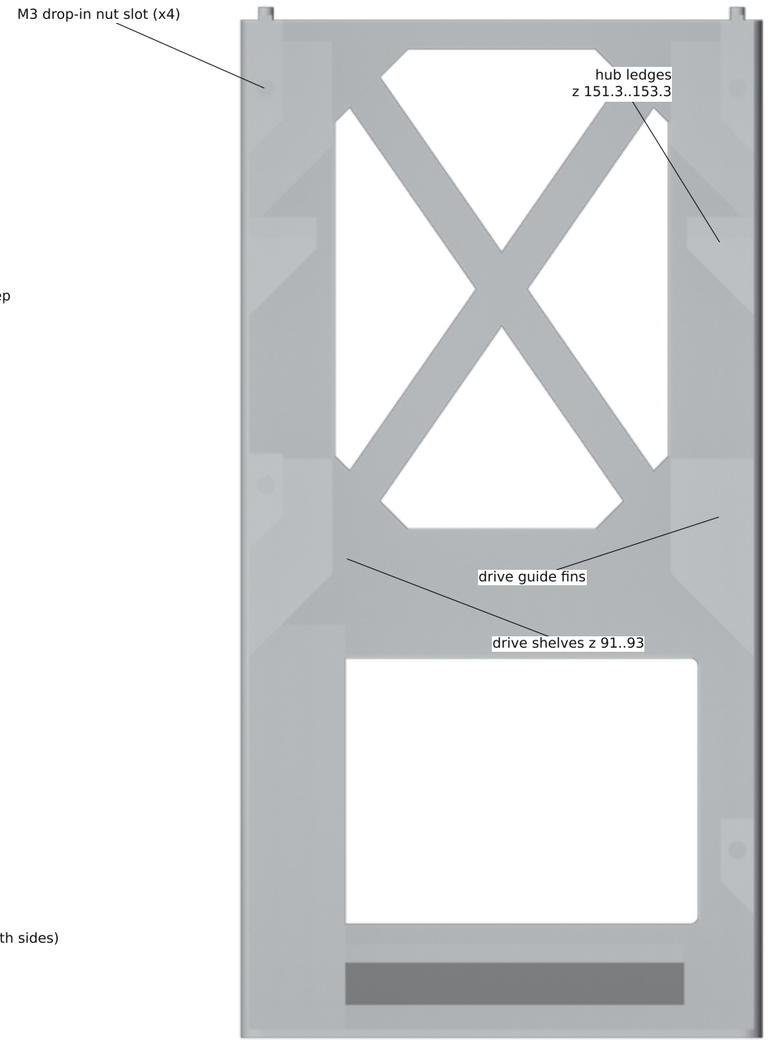


BACK (door removed)


NOTES

1. Walls and floor 1.6 (4 perimeters). Open top and open back.
2. Drive guides: wall fins 1.2 at z 89..111 and 171..191, lanes 6.8 / 9.3.
3. Drive shelves z 91..93 under each drive end; hub ledges z 151.3..153.3.
4. Screen: ledge z 16.4 + lip behind the bottom edge (x 15..85), fin behind it on the right.
5. 4 M3 nut slots open at the top (drop-in). 4 crown pegs dia 2.8 x 2.7.
6. Floor: 4 x dia 3.4 (leg screws) + 4 x dia 3.5 (leg pins). X brace raised 1.2 on the front.
7. Slicer check: 0 warnings (PrusaSlicer 2.9.6, Orca 2.4.2 Bambu X1C).

IP NAS ENCLOSURE v6d	2026-10-17
PART A - BODY	
File NAS_v6d_A_body.stl, print UPRIGHT (as drawn), no supports	Sheet 2 / 5
Material: PLA black, 110.0 g (slicer)	Scale 1:1.18, A3, mm

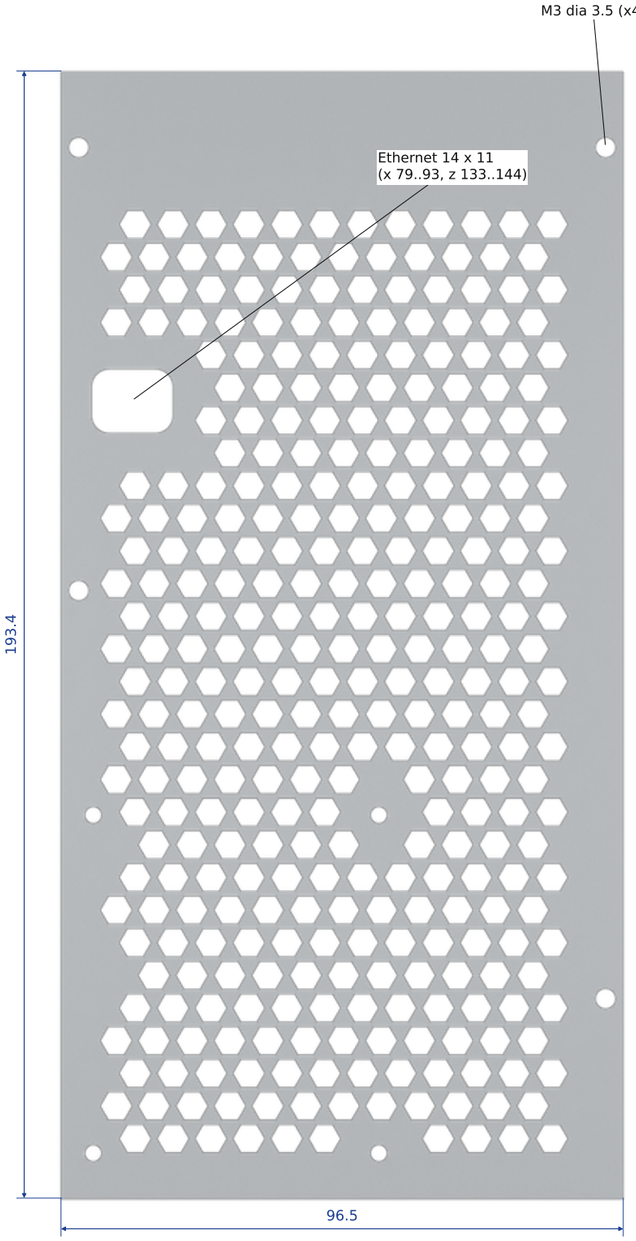

OUTSIDE (seen from behind)

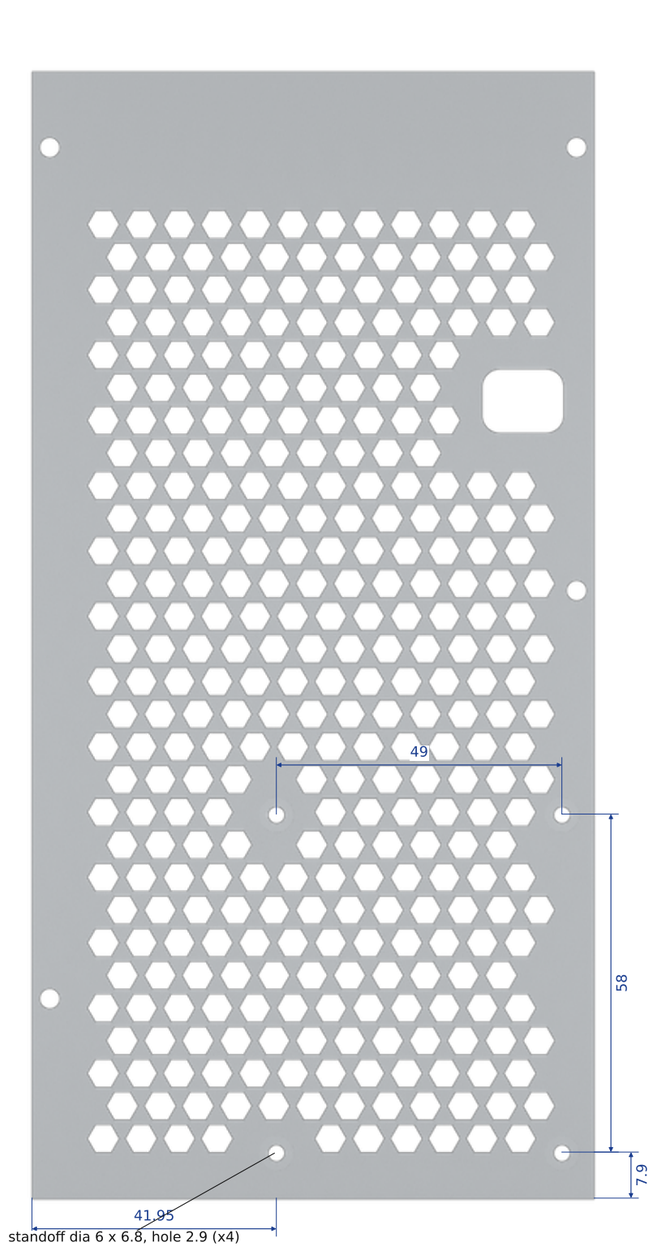

INSIDE (Pi side)



SIDE

NOTES


1. Plate 96.5 x 193.4 x 1.6 with hex vents (4.8 across flats).
2. 4 standoffs dia 6.0 x 6.8 high, hole dia 2.9 (M2.5 x 12 from outside).
3. Standoff pattern 49 x 58 = Raspberry Pi 5 mounting holes.
4. 4 holes dia 3.5 for M3 x 10 into the body bosses.
5. Ethernet exit 14 x 11, rounded r3.
6. Standoffs point UP on the print bed, so no supports.

IP NAS ENCLOSURE v6d


2026-10-17

PART B - BACK DOOR (Pi 5 mount)

File NAS_v6d_B_back_door.stl, print FLAT, outside face down	Sheet 3 / 5
Material: PLA black, 24.4 g (slicer)	Scale 1:1.05, A3, mm

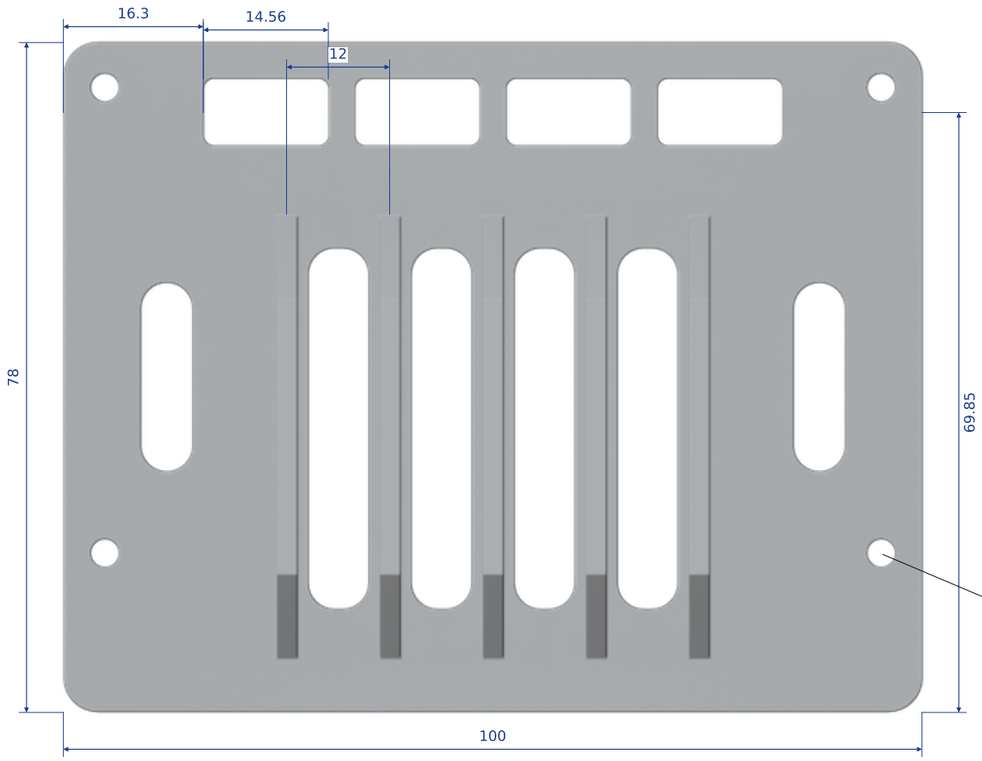

TOP

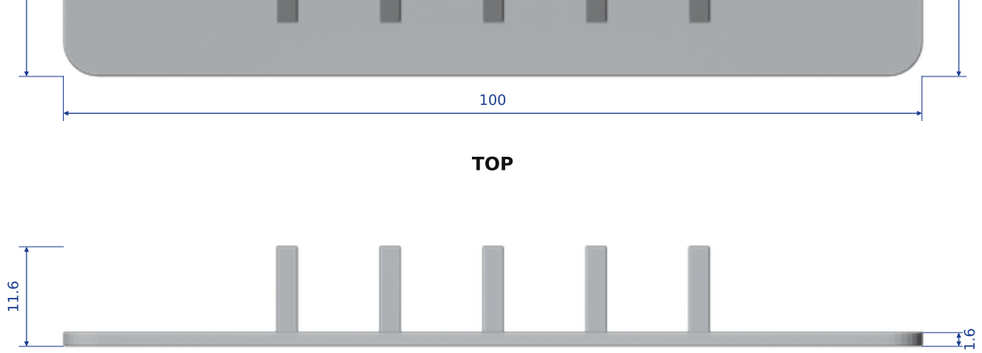

FRONT



RIGHT



D LEGS x4 (top)



D side


NOTES

1. Crown plate 100 x 78 x 1.6, corners r4.
2. 5 fins 2.4 wide x 10 high, pitch 12, 45° ends.
3. 4 exhaust slots 7 x 42 between the fins, 2 side slots 6 x 22.
4. 4 hub port windows 14.56 x 7.8 at the back edge.
5. 4 peg holes dia 3.3 (body pegs dia 2.8): x 4.8 from the sides, y 18.5 / 72.7.
6. Crown sits on the body pegs; no screws.
7. Legs: 4 x L 16 x 16 x 5 high; M3 nut pocket 6.0 AF x 2.6 on top.
8. Leg fixing: M3 x 6 from inside + nut in the pocket; pin dia 3.0 locates.


IP NAS ENCLOSURE v6d	2026-10-17
PART C - CROWN + PART D - LEGS	
NAS_v6d_C_crown.stl (fins up), NAS_v6d_D_legs_x4.stl (pegs up)	Sheet 4 / 5
Material: PLA black, C 18.0 g, D 4.0 g (slicer)	Scale 1.4:1, A3, mm

build plate 256 x 256

B BACK DOOR 96.5 x 193.4 x 8.4 (flat)

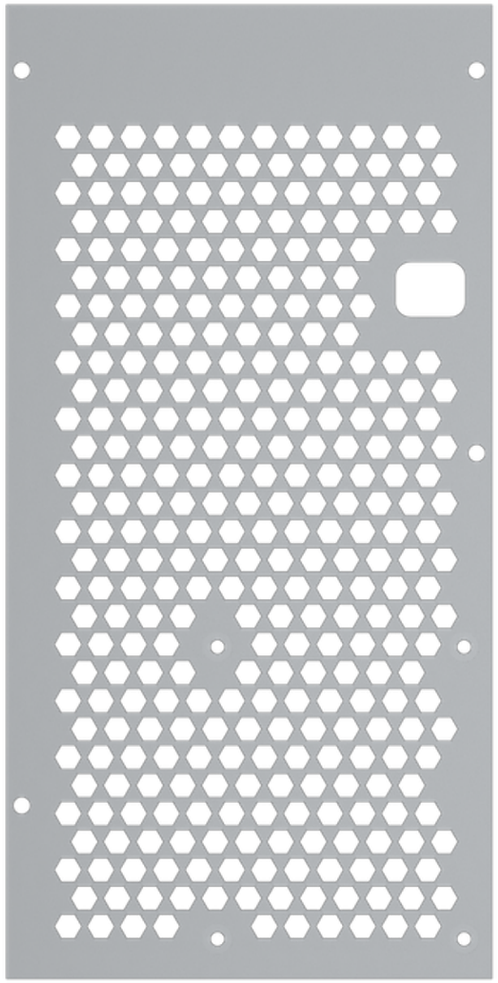


A BODY 100 x 78 x 197.5 (upright)

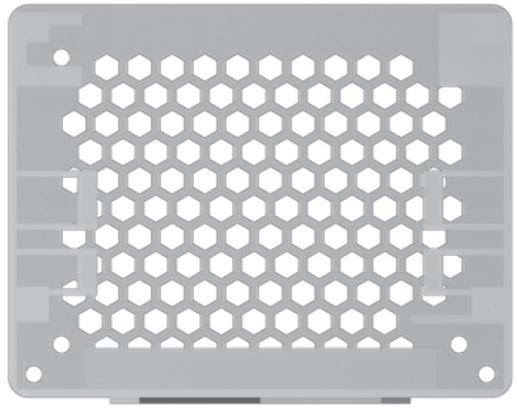

D LEGS x4
15.6 x 75.6 x 6.3



C CROWN 100 x 78 x 11.6 (fins up)

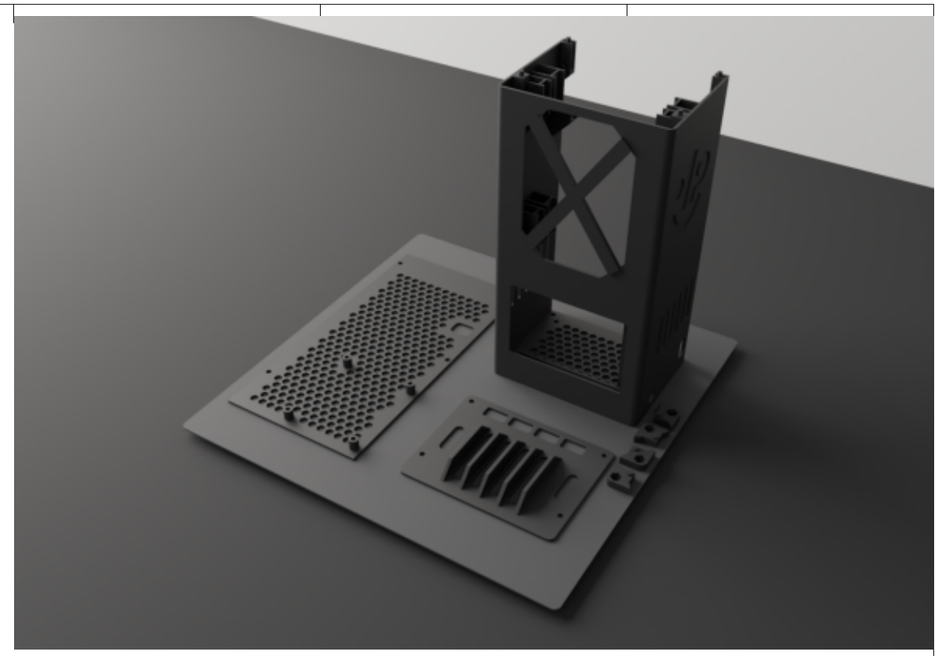

NOTES

1. STL files are already in print orientation and in mm.
2. Body upright (197.5 high incl. pegs). Door flat, standoffs up.
3. Crown fins up, legs pegs up. No supports anywhere.
4. Ready project: NAS_v6d_plate_Bambu_X1C_PLA.3mf (Bambu/Orca).
5. Any arrangement is fine if the bed is >= 200 x 200.
6. Smaller bed: print the door on its own plate.

IP NAS ENCLOSURE v6d

2026-10-17

PRINT PLATE LAYOUT (single plate, one colour)

All 4 STL files on one 256 x 256 bed, as exported (no rotation needed)	Sheet 5 / 5
Material: PLA black, plate total 156.4 g	Scale 1:1.22, A3, mm