

Experiment no :2

Aim: Create a html file to link difrent html pages which contains images,tables,links within page and also image hotsopt.

```
<html>
<head><title>WEBSITE</title>
</head>
<body><center><h1>HTML LINKS</h1></center>
<ul>
<li><a href="table.html">Table</a></li><br>
<li><a href="Link.html">Link</a></li><br>
<li><a href="map.html">Image</a></li>
</ul>
</body>
</html>
```



Table.html

```
<html>

<title>table</title>

<body>

<center>

<table border="2">

<tr>

<th>NAME</th>

<th>AGE</th>

<th>Email</th>

</tr>

<tr>

<td>Jhon</td>

<td>34</td>

<td>jhon@gmail.com</td>

</tr>

<tr>

<td>Doe</td>

<td>32</td>


<td>doe@gmail.com</td>

</tr>

</table></center>


</body>

</html>
```

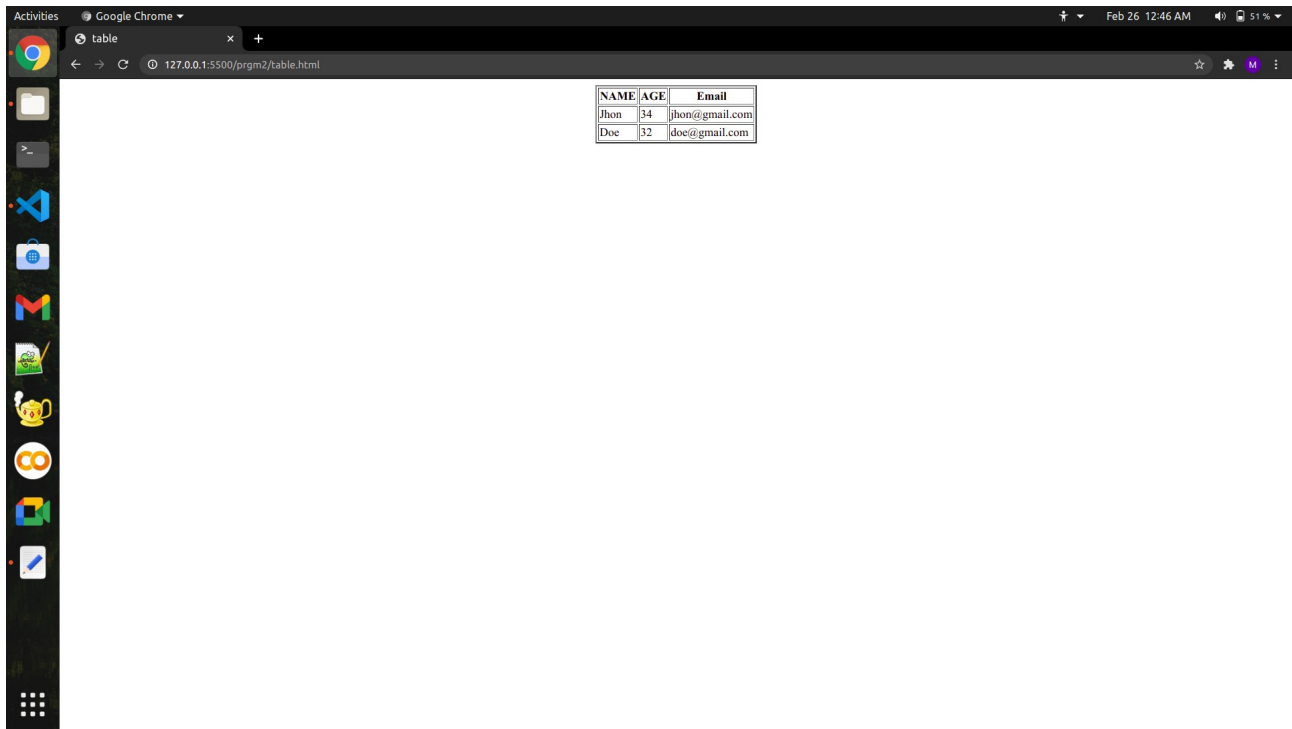

Link.html


```
<!DOCTYPE html>
<html>
<head>
<title>Basic tags</title>
</head>
<body>
<h1>
<center>Master of Computer Applications</center><br>
</h1>
<p><b>Master of Computer Applications</b> or <b>MCA</b> is a professional degree in
computer science.
MCA is a two year long professional post-graduate degree course for students who deeply want to
learn computer application development.
The MCA course is a combination of both theoretical and practical knowledge.</p>
<p><b>Job opportunities</b></p>
<ul>
<li>System analyst</li>
<li>Software Engineer</li>
<li>Programme Manager</li>
<li>Web Designer</li>
<li>Internet expert</li>
<li>Database Manager</li>
</ul>
</body>
</html>
```

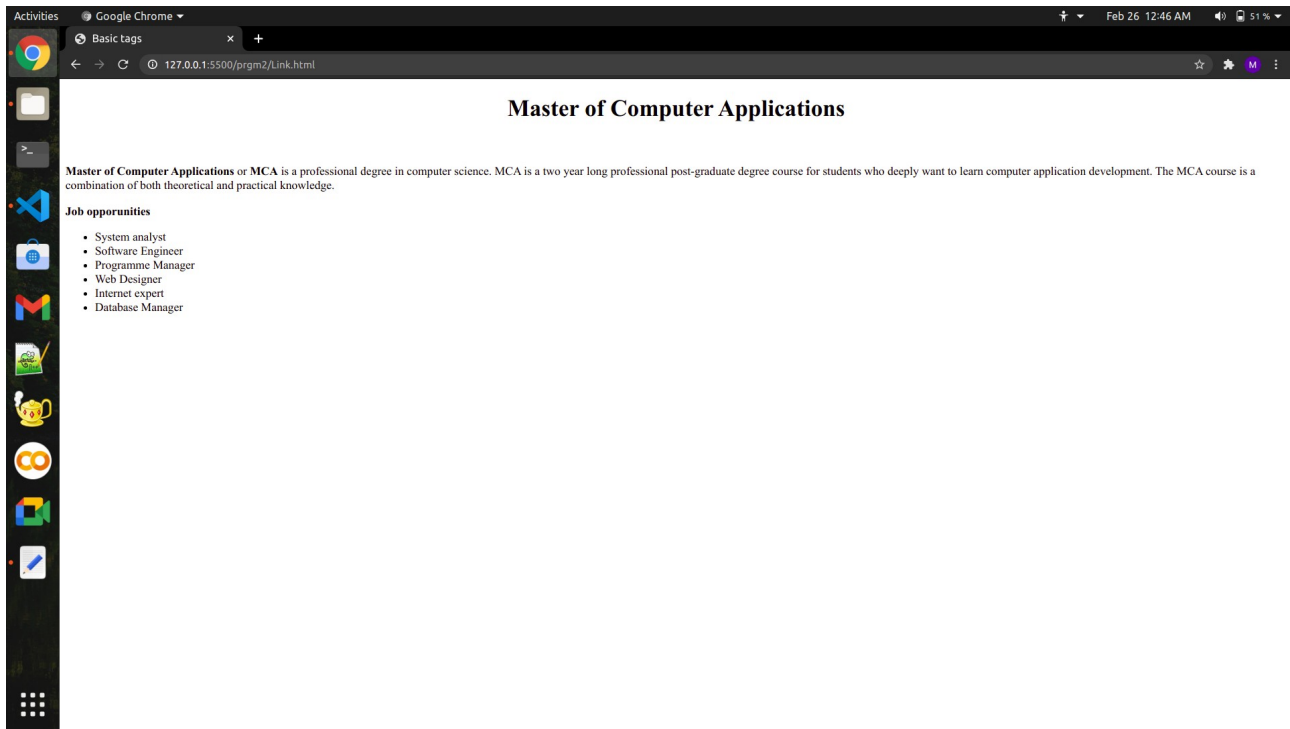

Map.html

```
<!DOCTYPE html>
<html>
<body>
<center>
<h1>COMPUTER</h1>

<map name="htmlmap">
<area shape="rect" coords="134,20,170,150" alt="Computer" href="htmlmap.html">
</map>
</body>
</center>
</html>
```

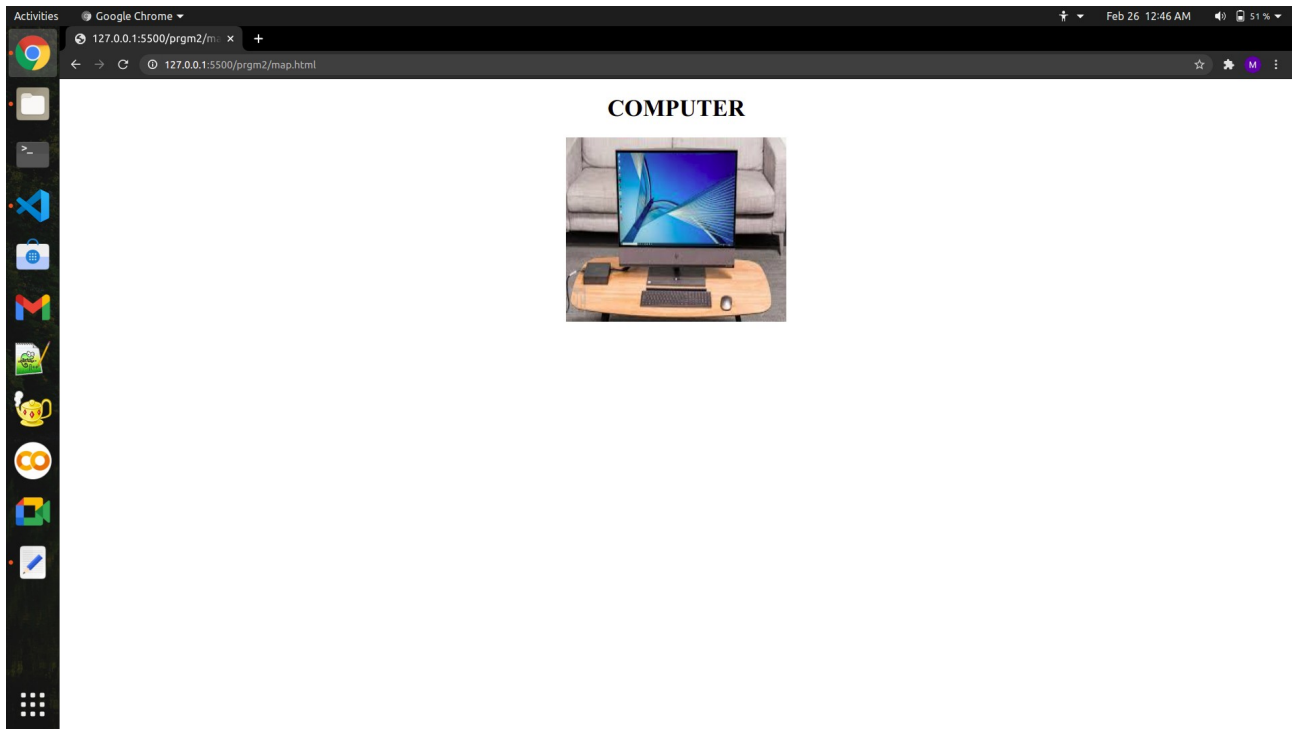

htmlmap.html

```
<html>
<title>table</title>
<body>
<center>
<h2>Computer monitor</h2>
<p>A computer monitor is an output device that displays information in pictorial form.
A monitor usually comprises the visual display, circuitry, casing, and power supply.
The display device in modern monitors is typically a thin film transistor liquid crystal
display (TFT-LCD) with LED backlighting having replaced cold-cathode fluorescent lamp (CCFL)
backlighting. Previous monitors used a cathode ray tube (CRT). Monitors are connected to
the computer via VGA, Digital Visual Interface (DVI), HDMI, DisplayPort,
USB-C, low-voltage differential signaling (LVDS) or other proprietary connectors and signals.</p>
</center>
</body>
</html>
```

