


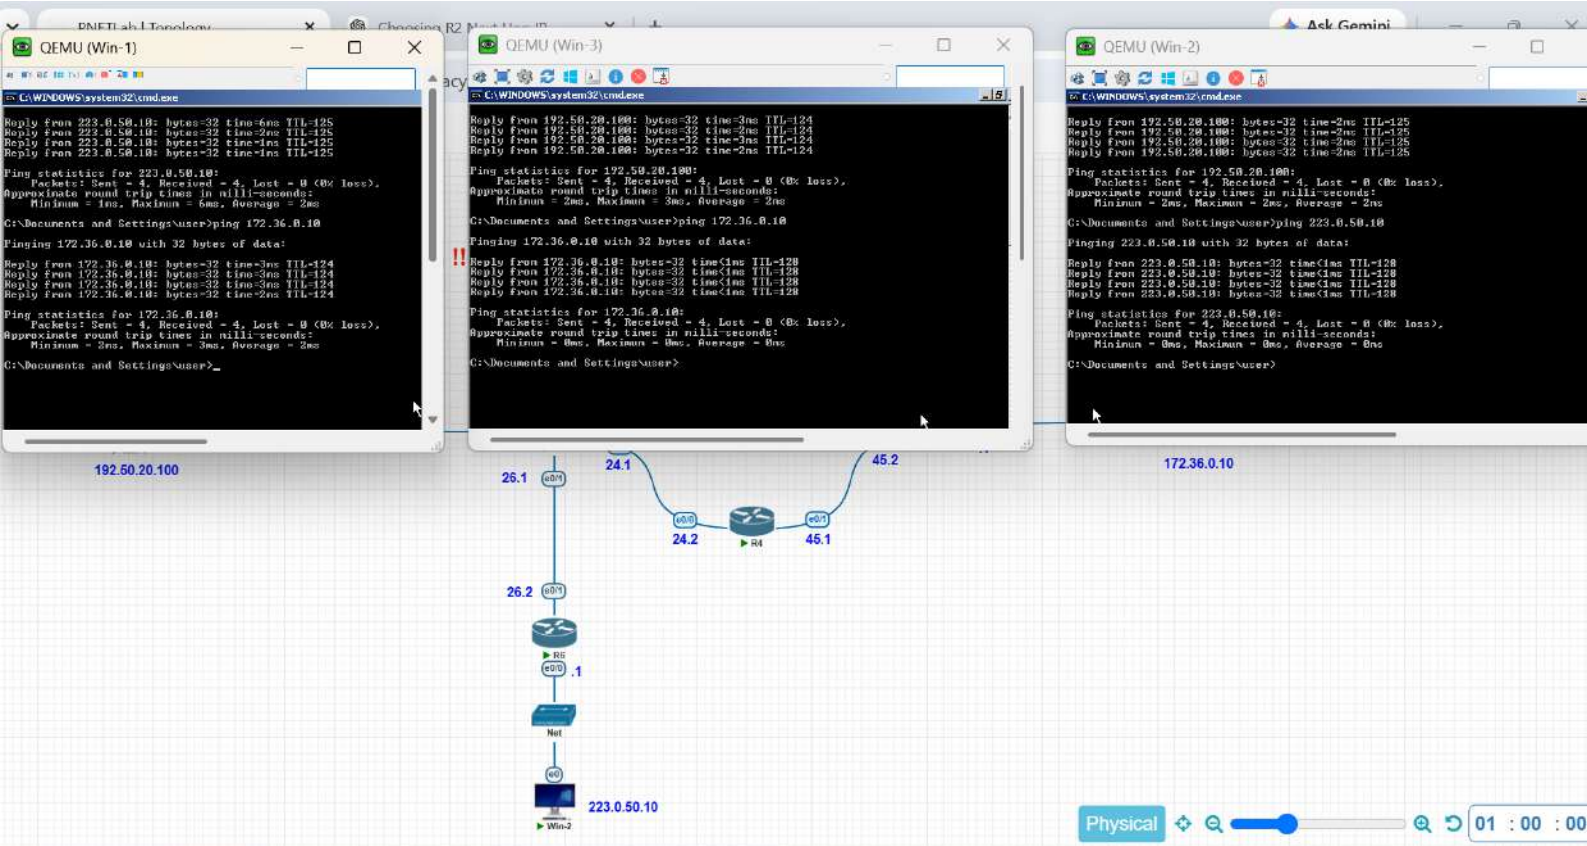

PNETLab | Topology x Choosing R2 Next Hop IP x + Ask Gemini

labs.surennetwork.com/legacy/topology

R1

```
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS
ia - IS-IS inter area, * - candidate default, U - per-user sta
o - ODR, P - periodic downloaded static route, H - NHRP, l - l
a - application route
+ - replicated route, % - next hop override, p - overrides fro

Gateway of last resort is not set

  12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/1
L    12.0.0.1/32 is directly connected, Ethernet0/1
S    23.0.0.0/8 [1/0] via 12.0.0.2
S    32.0.0.0/8 [1/0] via 12.0.0.2
S    45.0.0.0/8 [1/0] via 12.0.0.2
S    172.36.0.0/16 [1/0] via 12.0.0.2
C    192.50.20.0/24 is directly connected, Ethernet0/0
L    192.50.20.1/32 is directly connected, Ethernet0/0
S    223.0.50.0/24 [1/0] via 12.0.0.2
R1(config)#
R1(config)#
R1(config)#
```

R2

```
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

  12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
C    23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
C    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
C    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    45.0.0.0/8 [1/0] via 24.0.0.2
S    172.36.0.0/16 [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
R2(config)#
```

```

S  12.0.0.0/8 [1/0] via 24.0.0.1
C  24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L  24.0.0.0/8 is directly connected, Ethernet0/0
L  24.0.0.2/32 is directly connected, Ethernet0/0
C  45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L  45.0.0.0/8 is directly connected, Ethernet0/1
L  45.0.0.1/32 is directly connected, Ethernet0/1
S  172.36.0.0/16 [1/0] via 45.0.0.2
S  192.50.20.0/24 [1/0] via 24.0.0.1
S  223.0.50.0/24 [1/0] via 24.0.0.1
R4(config)#
R4(config)#

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B -
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S  12.0.0.0/8 [1/0] via 23.0.0.1
C  23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L  23.0.0.0/8 is directly connected, Ethernet0/0
L  23.0.0.2/32 is directly connected, Ethernet0/0
C  32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L  32.0.0.0/8 is directly connected, Ethernet0/1
L  32.0.0.1/32 is directly connected, Ethernet0/1
S  172.36.0.0/16 [1/0] via 32.0.0.2
S  192.50.20.0/24 [1/0] via 23.0.0.1
S  223.0.50.0/24 [1/0] via 23.0.0.1
R3(config)#
R3(config)#
R3(config)#

```

```
PuTTY (inactive)
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS
ia - IS-IS inter area, * - candidate default, U - per-user st
o - ODR, P - periodic downloaded static route, H - NHRP, l -
a - application route
+ - replicated route, % - next hop override, p - overrides fr

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 26.0.0.1
S 26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 26.0.0.0/8 is directly connected, Ethernet0/1
L 26.0.0.2/32 is directly connected, Ethernet0/1
S 32.0.0.0/8 [1/0] via 26.0.0.1
S 45.0.0.0/8 [1/0] via 26.0.0.1
S 172.36.0.0/16 [1/0] via 26.0.0.1
S 192.50.20.0/24 [1/0] via 26.0.0.1
C 223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
L 223.0.50.0/24 is directly connected, Ethernet0/0
L 223.0.50.1/32 is directly connected, Ethernet0/0
Router(config)#
Router(config)#
```



```
R5
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 32.0.0.1
S 23.0.0.0/8 [1/0] via 32.0.0.1
S 24.0.0.0/8 [1/0] via 45.0.0.1
C 32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 32.0.0.2/32 is directly connected, Ethernet0/1
C 45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 45.0.0.2/32 is directly connected, Ethernet0/2
L 45.0.0.2/32 is directly connected, Ethernet0/2
C 172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 172.36.0.0/16 is directly connected, Ethernet0/0
L 172.36.0.1/32 is directly connected, Ethernet0/0
S 192.50.20.0/24 [1/0] via 32.0.0.1
S 223.0.50.0/24 [1/0] via 45.0.0.1
R5(config)#
R5(config)#
R5(config)#
```