


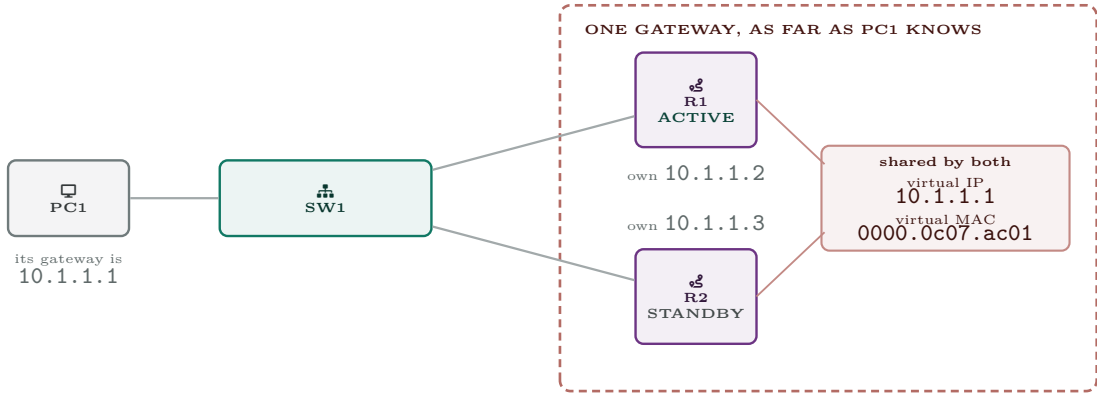

PC1 knows one address and one MAC. If R1 fails, R2 answers to *both* of them — so PC1's ARP cache is still correct and it never notices.