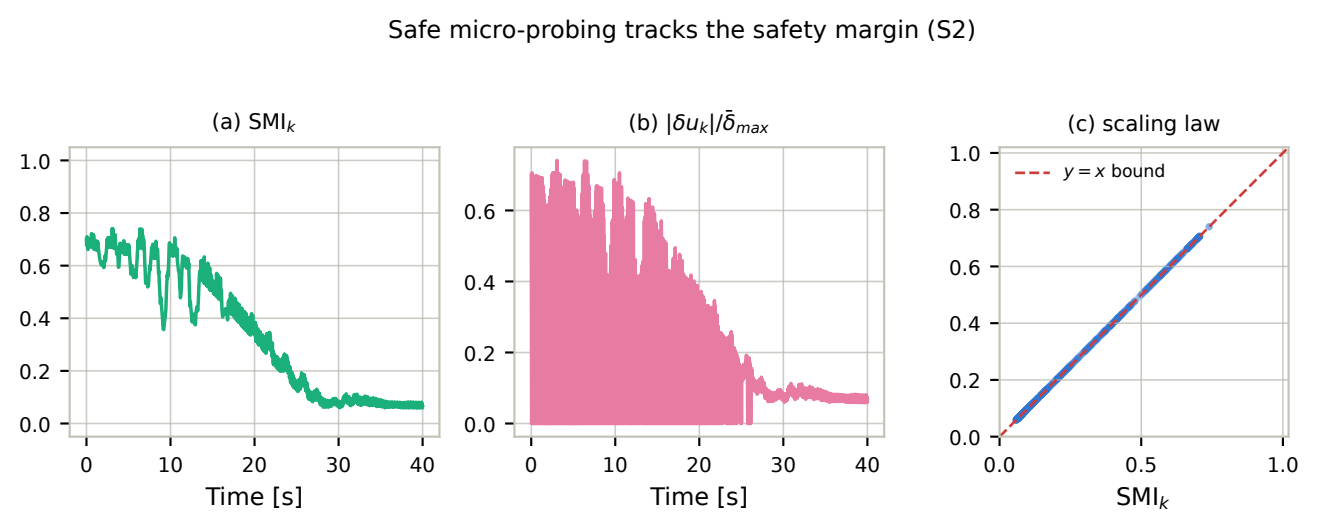

Safe micro-probing tracks the safety margin (S2)
(a) SMI$_k$
(b) $|\delta u_k|/\bar{\delta}_{max}$
(c) scaling law
$y = x$ bound
Time [s]
Time [s]
SMI$_k$