




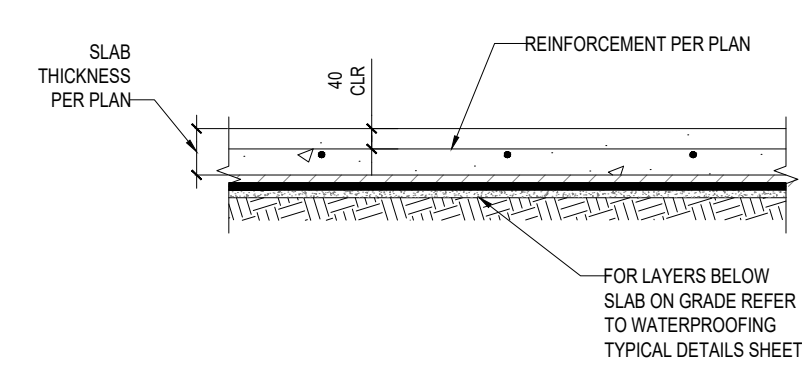


A NO DEPRESSION

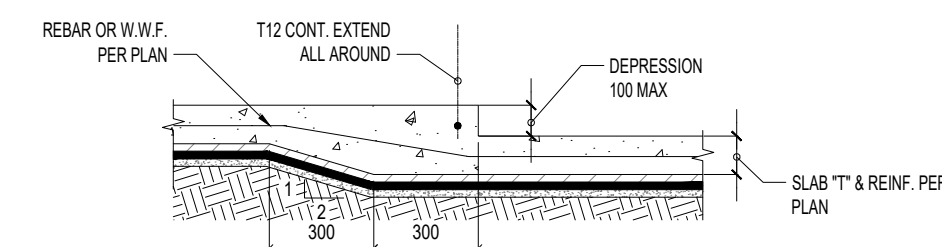

B DEPRESSION <=100

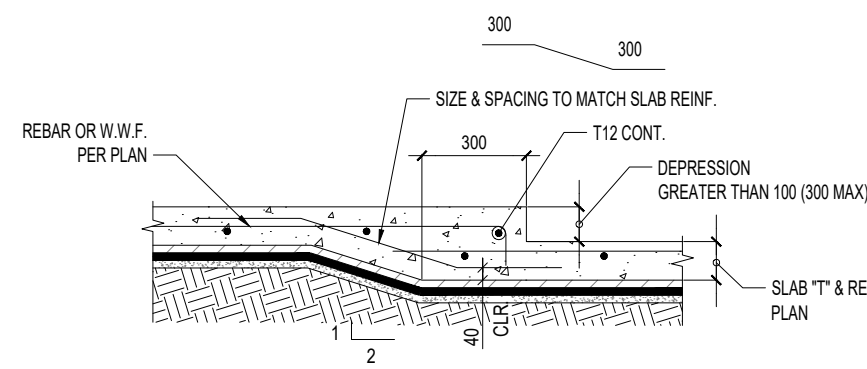


C DEPRESSION >100 & <=300

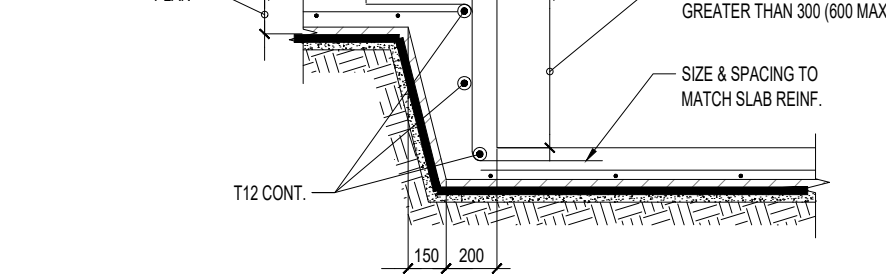

D DEPRESSION >300 & <=600

TYP. SLAB ON GRADE DEPRESSION

SCALE: N.T.S.

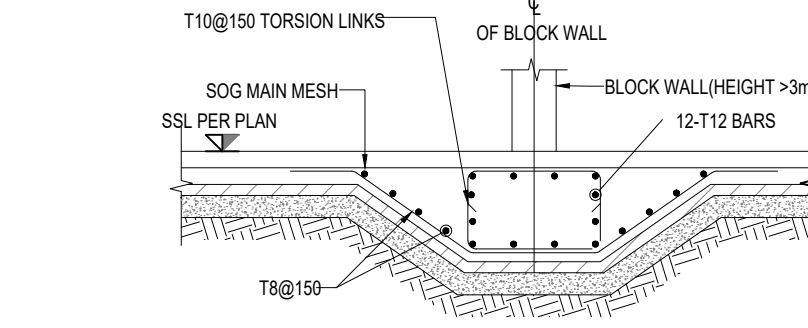


NOTES:

1. THIS DETAIL IS TYPICAL FOR ALL INTERNAL BLOCK WALL LOCATIONS. SLAB THICKENINGS ARE NOT SHOWN ON PLAN FOR CLARITY.

7 THICKENING BELOW NON LOAD BEARING BLOCK WALL AT SLAB ON GRADE

SCALE: N.T.S.

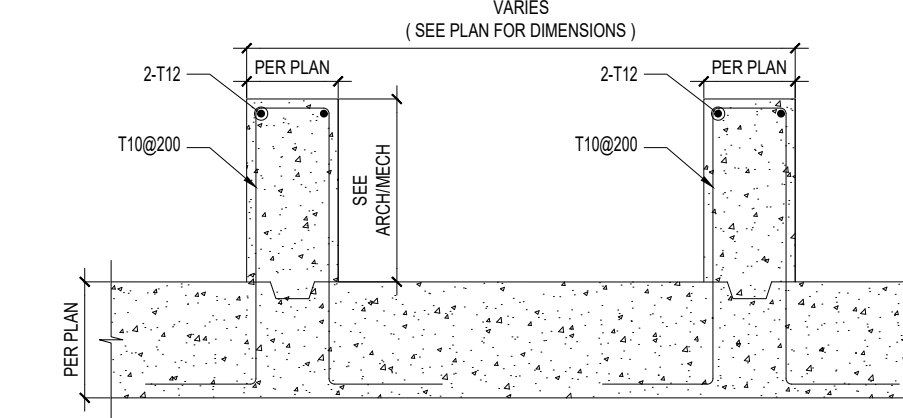


NOTES:

1. MECHANICAL EQUIPMENT SHALL BE PROVIDED WITH VIBRATION DAMPER.
2. FOR PAD DIMENSIONS AND ANCHOR BOLTS SIZE AND LOCATION, REFER TO MANUFACTURER DWGS. OF EQUIPMENT.
3. SUPPORTING SLAB: THIS DETAIL CAN BE UTILIZED ONLY WHERE EXPRESSLY INDICATED ON THE STRUCTURAL FLOOR PLANS. IF NOT SHOWN, OBTAIN S.E.O.R. APPROVAL PRIOR TO ERECTION.
4. THICKEN PAD AS REQUIRED FOR HOLD-DOWN ANCHOR EMBEDMENT.


10 TYP. CHILLER MOUNTING AT ROOF

SCALE: N.T.S.

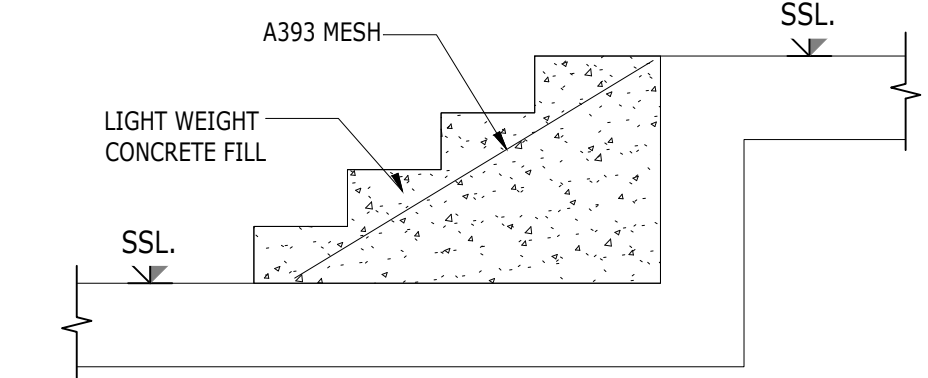

14 STAIRS INFILL


SCALE: N.T.S.

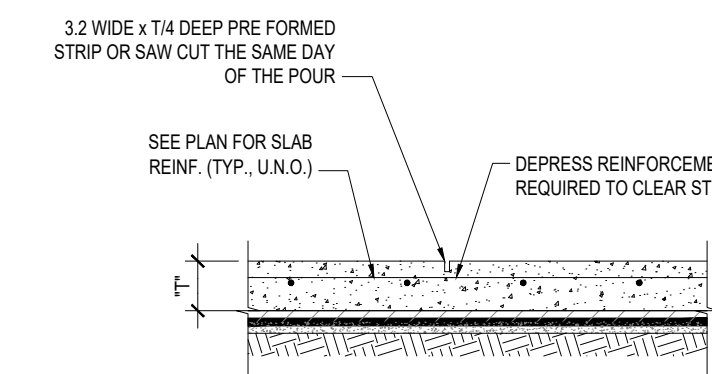

A CONTROL JOINT (WHERE CONTINUOUS POUR IS USED)

NOTES:


1. CONTROL JOINTS TO BE LOCATED AT COLUMN CENTER LINES AND AT 6000mm O.C. MAX. AND EVERY 400 SQUARE FEET.
1. IF SAW-CUT CONTROL JOINT TO BE USED, SAW-CUT WITHIN 24 HOURS OF POUR.
2. SEE PLAN FOR 'T'.

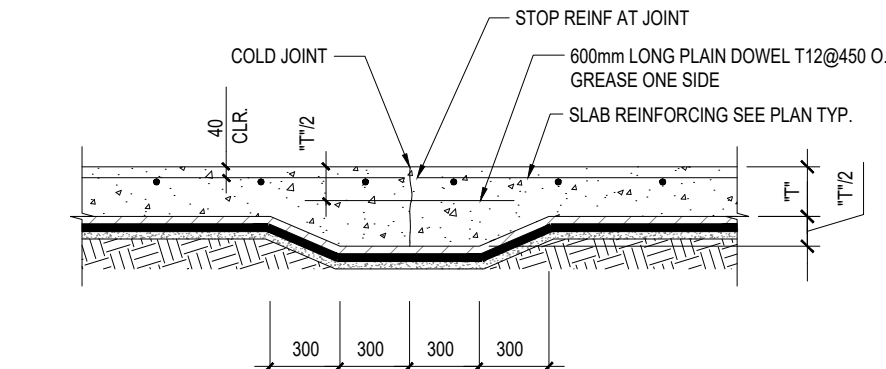

B TYPICAL CONSTRUCTION JOINT


JOINT AT SLAB ON GRADE

SCALE: N.T.S.

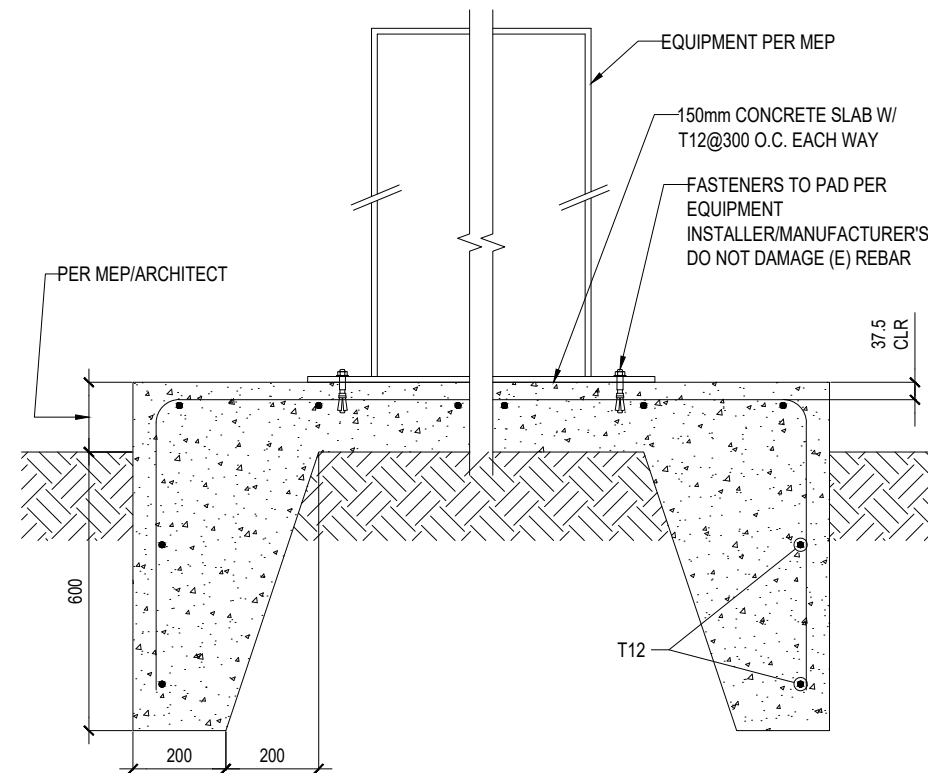


8 EQUIPMENT CONC. PAD ON GRADE

SCALE: N.T.S.

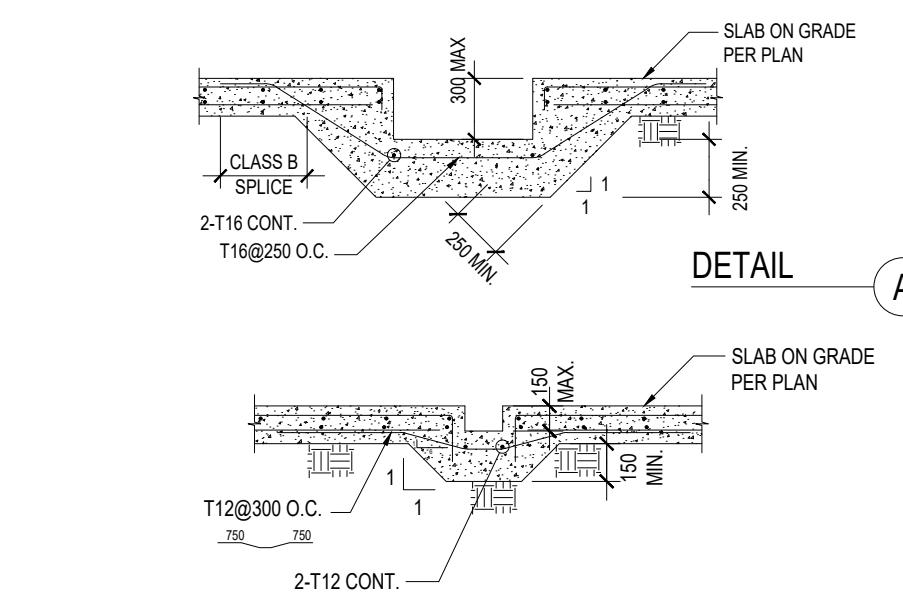


11 TRENCH DRAIN DETAIL

SCALE: N.T.S.

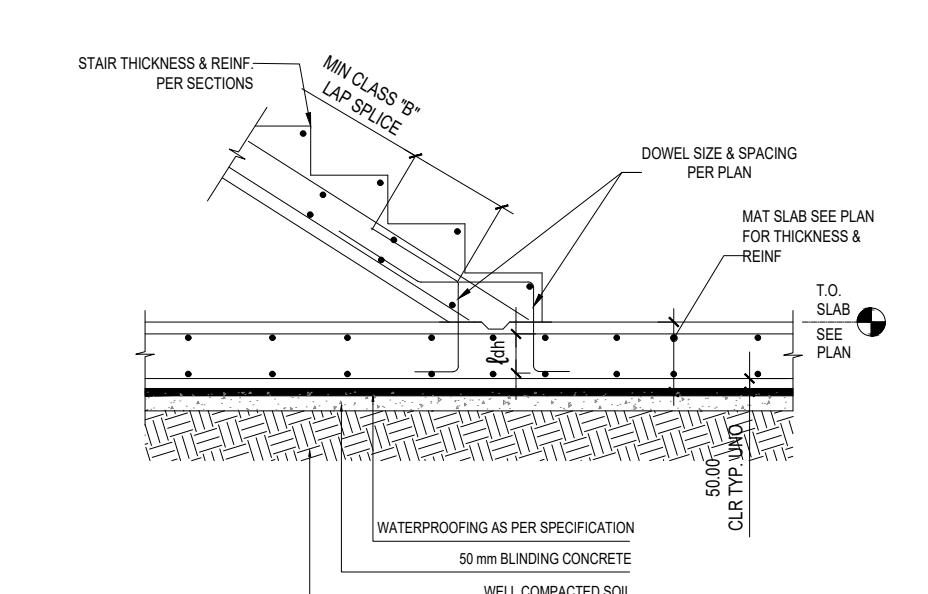


15 TYP. DETAIL OF STAIR STARTER


SCALE: N.T.S.

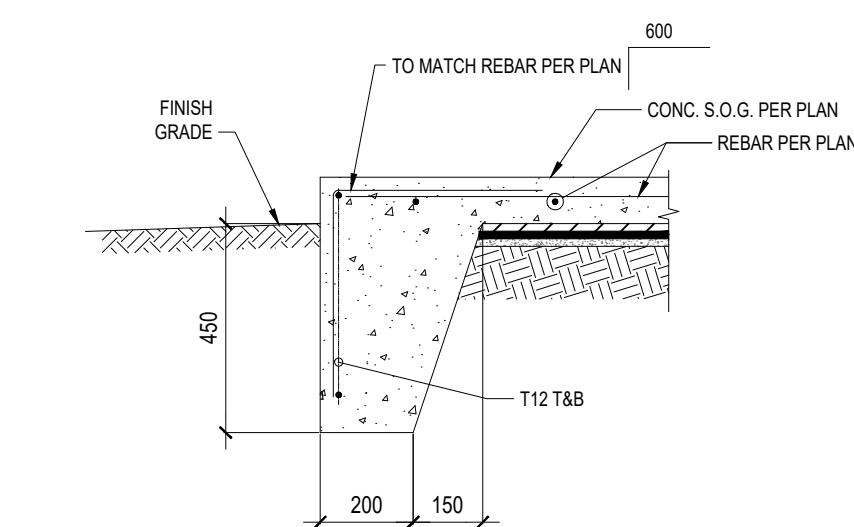

3 SLAB ON GRADE EDGE DETAIL

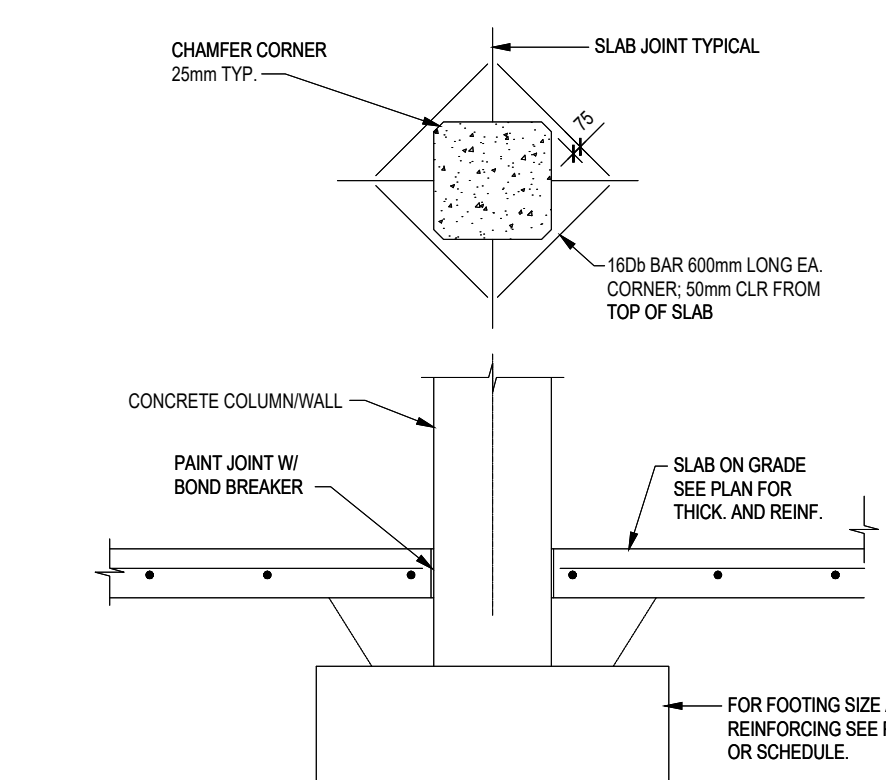


5 SLAB ON GRADE AT COLUMNS

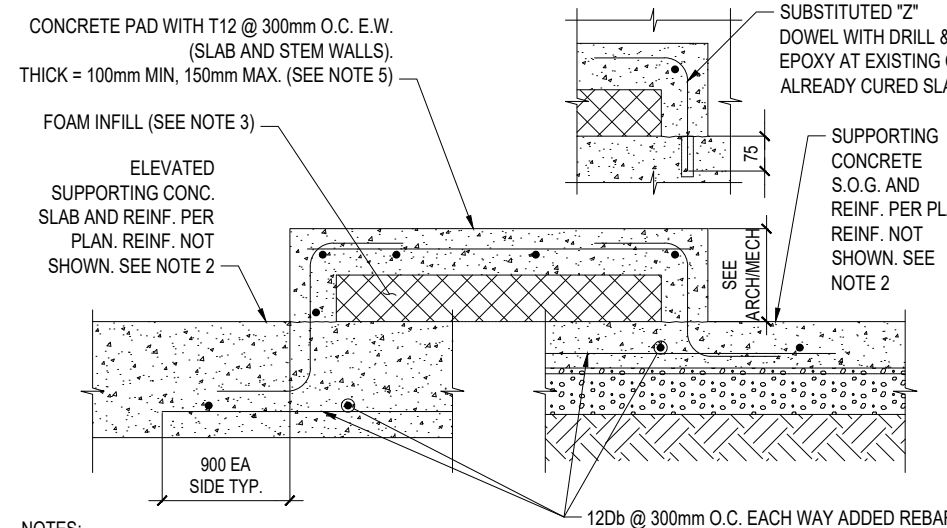

NOTES:

1. THIS DETAIL ADDRESSES THE CONSTRUCTION OF CONCRETE MECHANICAL AND HOUSEKEEPING PAD.
2. SUPPORTING SLAB:
 - SLAB ON GRADE: THIS DETAIL CAN BE UTILIZED AT ALL LOCATIONS
 - ELEVATED SLAB: THIS DETAIL CAN BE UTILIZED ONLY WHERE EXPRESSLY INDICATED ON THE STRUCTURAL FLOOR PLANS. IF NOT SHOWN, OBTAIN S.E.O.R. APPROVAL PRIOR TO ERECTION
3. AT CONTRACTOR'S DISCRETION, FOAM CAN BE SUBSTITUTED WITH CONCRETE IF THE SUPPORTING SLAB IS ON GRADE. THIS SUBSTITUTION IS NOT ALLOWED FOR ELEVATED SUPPORTING SLAB.
4. CONCRETE PAD CONFIGURATION, ANCHOR BOLT SIZE, PROJECTION AND LOCATION SHALL CONFORM TO EQUIPMENT MANUFACTURER'S REQUIREMENTS.
5. THICKEN PAD AS REQUIRED FOR HOLD-DOWN ANCHOR EMBEDMENT.


9 MECH. PAD FOR LIGHT EQUIPMENT

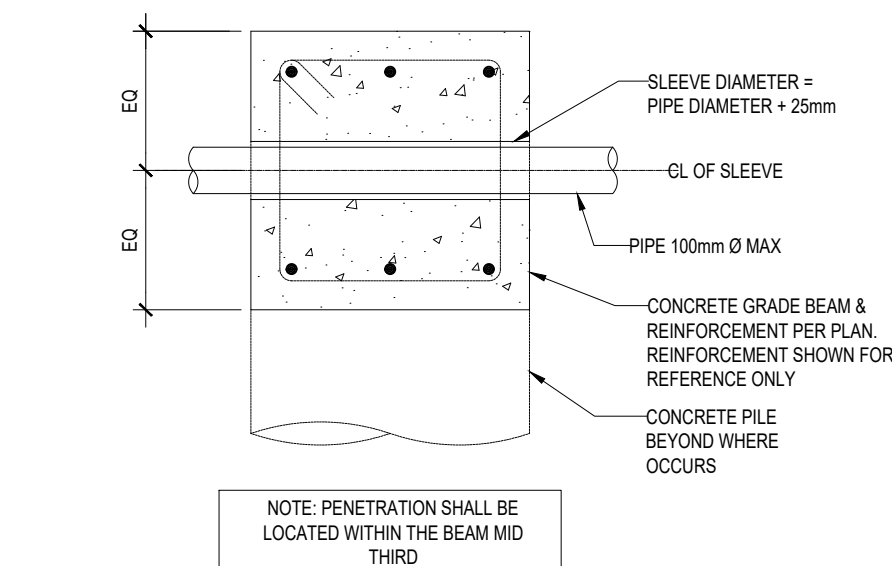

NOTE: PENETRATION SHALL BE LOCATED WITHIN THE BEAM MID THIRD

4 TYP. PIPE THROUGH GRADE BEAM

SCALE: N.T.S.

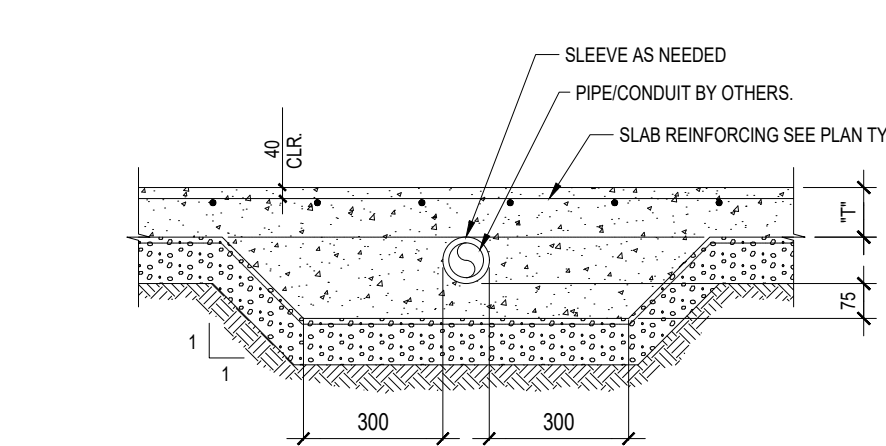


NOTES:

1. SEE PLAN FOR CONCRETE SLAB ON GRADE THICKNESS, 'T'.

6 TYP. PIPE THROUGH SLAB ON GRADE

SCALE: N.T.S.

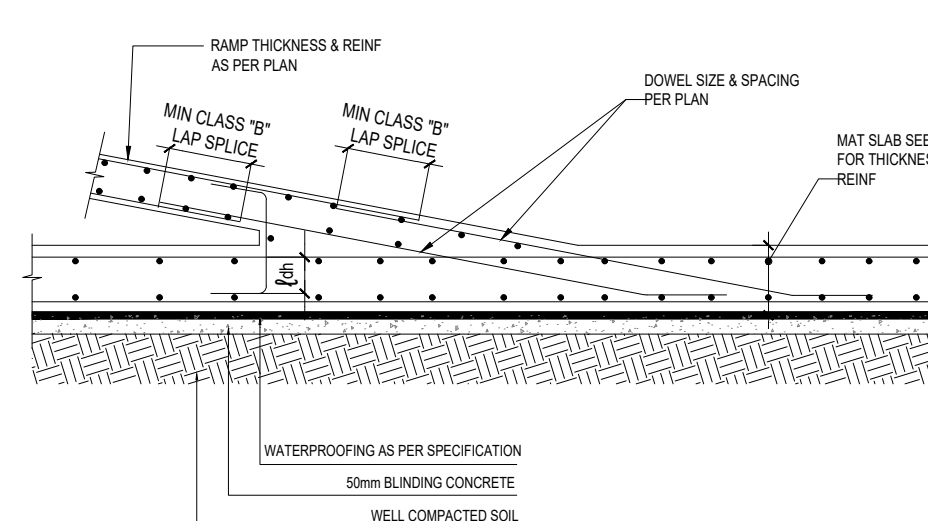


17 TYP. DETAIL OF RAMP STARTER

SCALE: N.T.S.

GENERAL NOTES

1. This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
2. All works shall be carried out in accordance with particular & general specifications, in conjunction with relevant conditions of contract.
3. This drawing shall not be used directly for Construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
4. All dimensions and levels are in millimeter, unless noted otherwise, only written dimensions to be followed and not scaled from the drawing.
5. All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
6. For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution. Shop drawings to particularly incorporate details at structural expansion joints as well as expansion / construction joints needed for the respective materials/ finishes / related works.
7. Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
8. Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

KEY PLAN

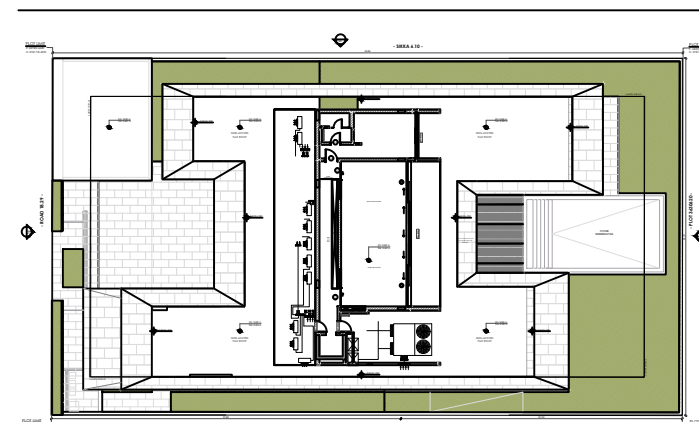

DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

CLIENT

TARUN HARISH CHANDRA KHANNA

DRAWING DETAILS

TYPICAL DETAILS - (SHEET 2 OF 10)

SHEET #

269-S-011

REVISION

R0

ISSUE DATE:

14-03-2025

SCALE @ A1

AS SHOWN

PROJECT DETAILS

KHANNA VILLA



PROJECT LOCATION
PLOT NO. 3630160
Al Manara,
Dubai

PROJECT NUMBER

269

PROJECT PHASE

DETAIL DESIGN

CONSULTANT

LOCI
لوکار

Office M31, KIA Flagship
Building
Sheikh Zayed Rd, Al Quoz 1
P. O. Box 72928, Dubai
T +971 4 357 6573
W www.loci.ae