
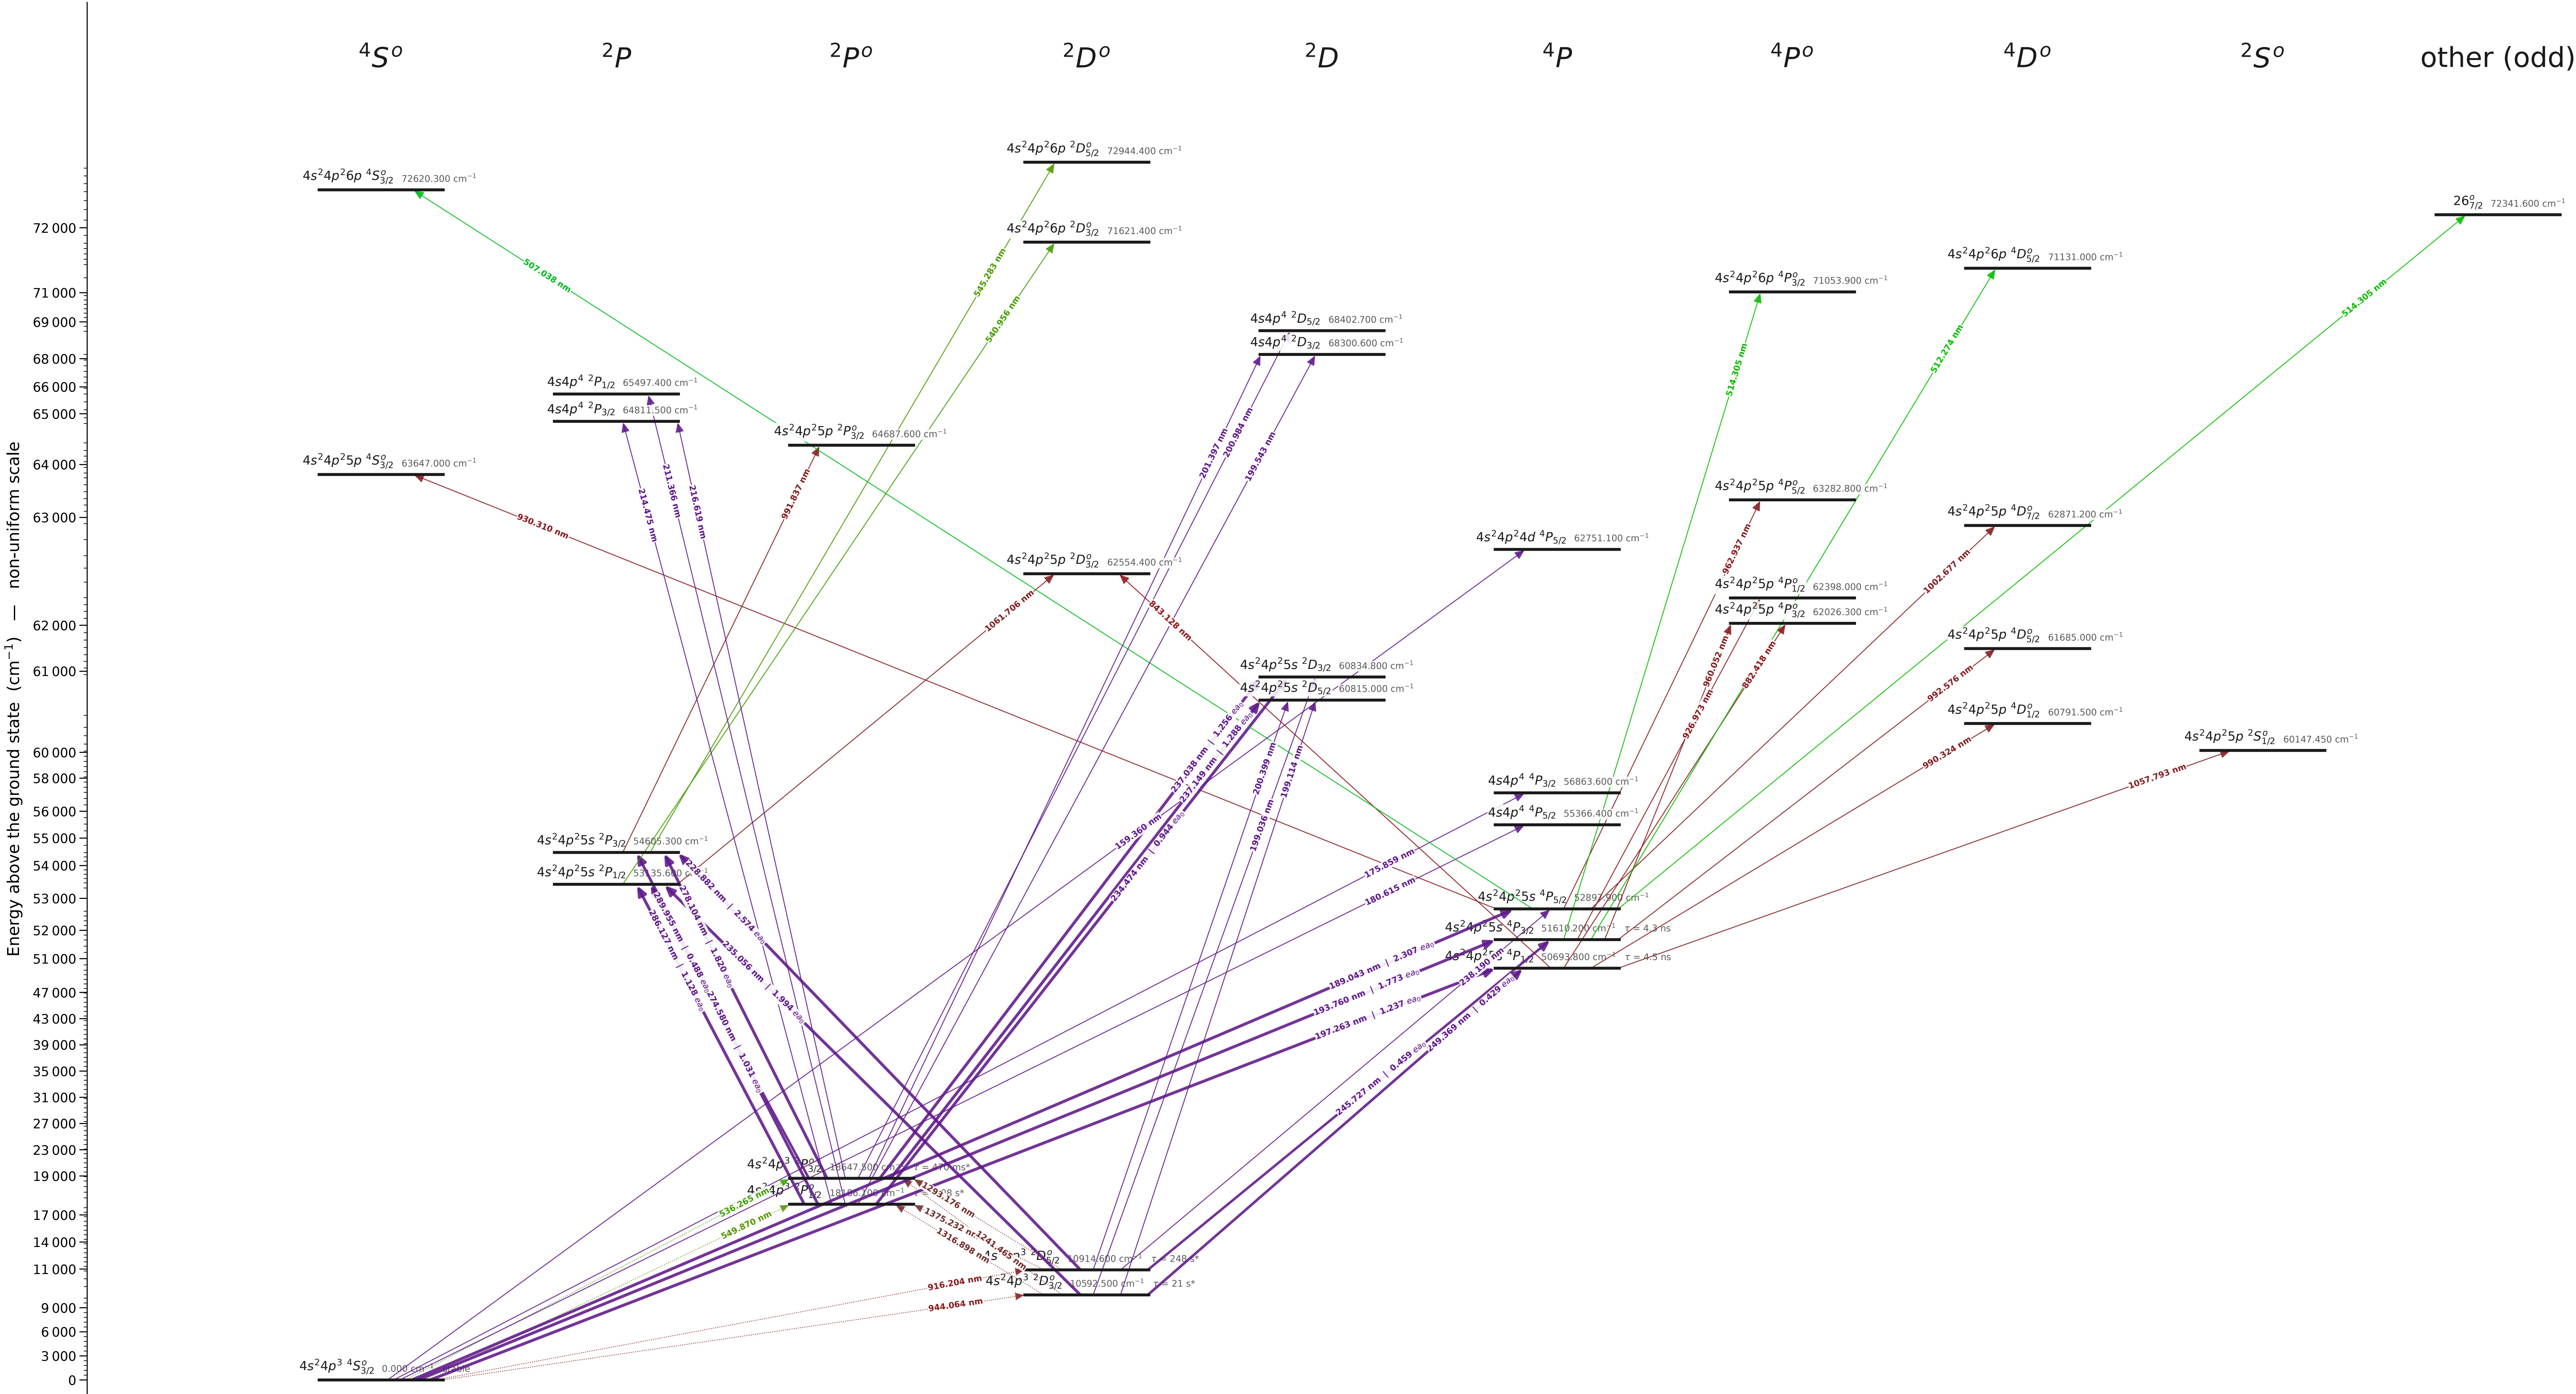


Arsenic

As (As I). Strongest classified transitions below 2 μm (NIST): 35 levels, 53 lines.

As⁺ ionisation limit 78950.00 cm⁻¹ = 9.78855 eV (126.662 nm)

Arrow label: vacuum wavelength | reduced dipole matrix element $[U||e\mathbf{r}||U']$ in ea₀
Matrix elements are measured or NIST values; * = high-accuracy theory, ≈ = model calculation.
Arrow width grows with the Einstein coefficient A. Dotted: forbidden (clock, M1, E2). Dashed: Rydberg excitation, $n = 70$.
Level caption: energy (NIST, or a measurement of the last 20 years where one exists) and measured lifetime (where one exists).

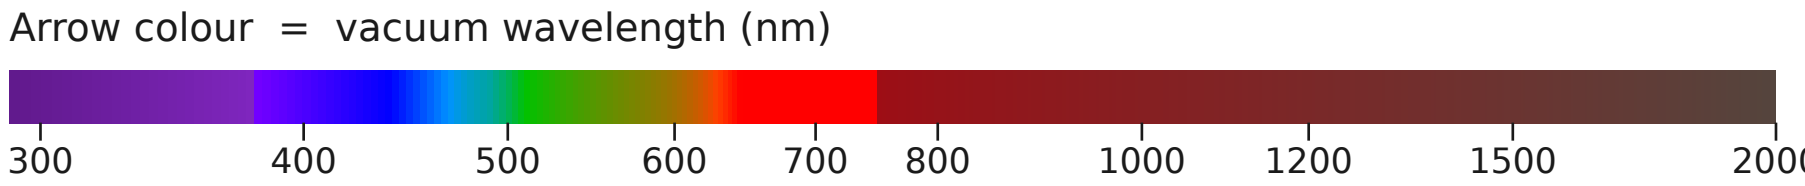

Key transitions

Transition	λ vac (nm)	λ air (nm)	ν (THz)	[U e $\mathbf{r}$ U'] (ea ₀)	A (s ⁻¹)	Γ/2π up. (MHz)	branch (%)	Use
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ² 5s 4P _{3/2}	193.7601	-	1547.2349	1.773	2.190e+08	37.01	94.2	resonance line
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ² 5s 4P _{1/2}	197.2628	-	1519.7619	1.237	2.020e+08	35.37	90.9	resonance line
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ³ 2P _{3/2} ^o	536.2649	536.1158	559.0380	-	1.600e+00	3.386e-07	75.2	forbidden line within the ground configuration
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ³ 2P _{1/2} ^o	549.8705	549.7178	545.2056	-	6.910e-01	1.474e-07	74.6	forbidden line within the ground configuration
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ³ 2D _{5/2} ^o	916.2040	915.9526	327.2115	-	5.300e-03	6.418e-10	100	forbidden line within the ground configuration
4s ² 4p ³ 4S _{3/2} ^o - 4s ² 4p ³ 2D _{3/2} ^o	944.0642	943.8053	317.5552	-	7.490e-02	7.579e-09	100	forbidden line within the ground configuration
4s ² 4p ³ 2D _{5/2} ^o - 4s ² 4p ³ 2P _{3/2} ^o	1241.4649	1241.1253	241.4828	-	6.720e-01	3.386e-07	31.6	forbidden line within the ground configuration
4s ² 4p ³ 2D _{5/2} ^o - 4s ² 4p ³ 2P _{1/2} ^o	1293.1759	1292.8223	231.8265	-	4.400e-01	3.386e-07	20.7	forbidden line within the ground configuration
4s ² 4p ³ 2D _{3/2} ^o - 4s ² 4p ³ 2P _{3/2} ^o	1316.8984	1316.5384	227.6504	-	4.200e-01	1.474e-07	45.4	forbidden line within the ground configuration
4s ² 4p ³ 2D _{3/2} ^o - 4s ² 4p ³ 2P _{1/2} ^o	1375.2321	1374.8561	217.9941	-	5.900e-02	1.474e-07	6.37	forbidden line within the ground configuration

λ, ν from NIST level energies unless a measured frequency for this isotope is available. A: measured value or NIST.
Γ/2π: natural linewidth of the upper level, 1/(2πτ).

⁷⁵As hyperfine structure ($I = 3/2$)

Level	A (MHz)	B (MHz)	Shift of each F level from the centre of gravity (MHz)
4s ² 4p ³ 4S _{3/2} ^o	-66.2040(10)	-0.535(3)	F=0: +247.60 F=1: +181.93 F=2: +50.05 F=3: -149.09
4s ² 4p ³ 2D _{5/2} ^o	480(9)	-	F=0: -1800.00 F=1: -1320.00 F=2: -360.00 F=3: +1080.00
4s ² 4p ³ 2D _{3/2} ^o	725(26)	-	F=1: -3806.25 F=2: -2356.25 F=3: -181.25 F=4: +2718.75
4s ² 4p ³ 2P _{3/2} ^o	1909(14)	-	F=1: -2386.25 F=2: +1431.75
4s ² 4p ³ 2P _{1/2} ^o	359(59)	-	F=0: -1346.25 F=1: -987.25 F=2: -269.25 F=3: +807.75

Measured A, B constants; sources in the data file.