

Computer Networks Lab 06

Course: Computer Networks (CL3001)

Instructor: Sadaf Zehra

Semester: Fall 2025

T.A: N/A

Note:

- Maintain discipline during the lab.
 - Listen and follow the instructions as they are given.
 - Just raise hand if you have any problem.
 - Completing all tasks of each lab is compulsory.
 - Get your lab checked at the end of the session.
-

Lab Objective

- ☐ Introduction to Telnet & configuration of Telnet in Cisco Packet Tracer.
- ☐ Introduction to SSH & configuration of SSH in Cisco Packet Tracer.

Computer Networks

CL3001

LAB - 06

Telnet, SSH, ACL (Standard)

NATIONAL UNIVERSITY OF COMPUTER AND EMERGING SCIENCES,
KARACHI CAMPUS
FAST SCHOOL OF COMPUTING (AI & DS, CS, CY, SE)
SPRING 2025

□ Introduction to ACL & configuration of ACL in Cisco Packet Tracer.

Note:

Submit the screenshot of every step and also submit a .pkt file.

Lab Exercise – I

Implement the topology given below on cisco packet tracer:

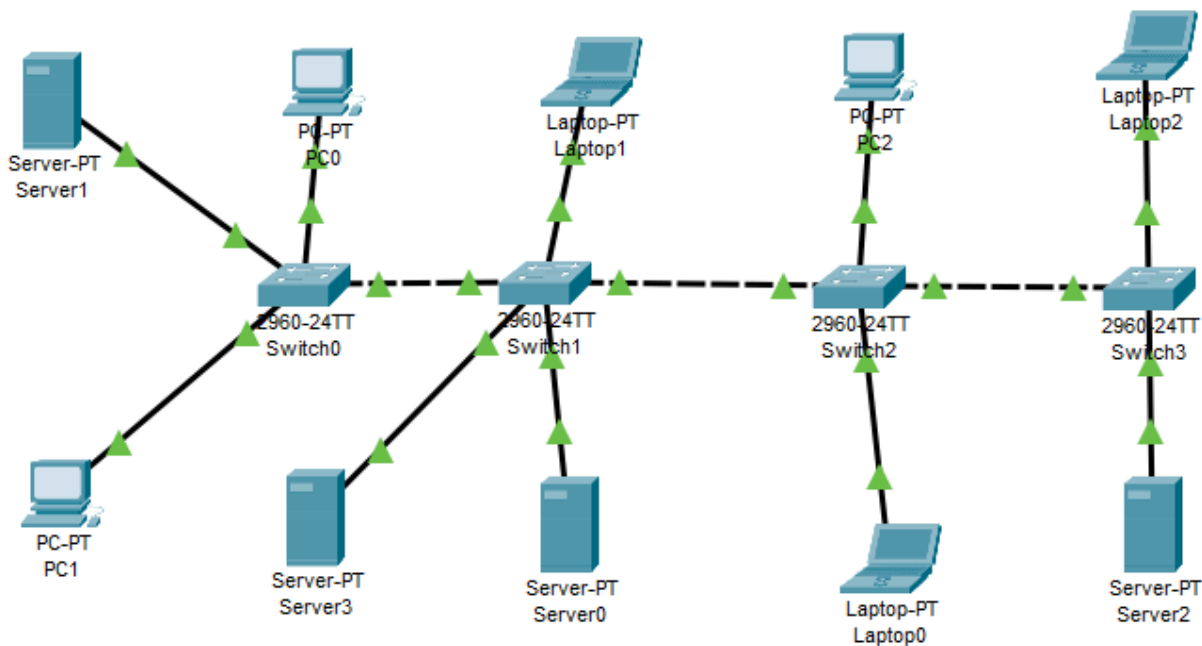


Figure 01

Do the following:

- Assign IP to the computers. The Network should like this XX.XX.YY.0. i.e. your roll number like 3879(38.79.1.0) and for all other networks Y should be replaced by 2, 3 and so on.
- Ping the server from any computer.
- Verify the telnet connection from all switches nearest to the computer.
- Do change the IP of Switch1 from Laptop1 and Switch2 from Laptop0 using its command prompt.

Lab Exercise – II

Implement the topology given below on cisco packet tracer:

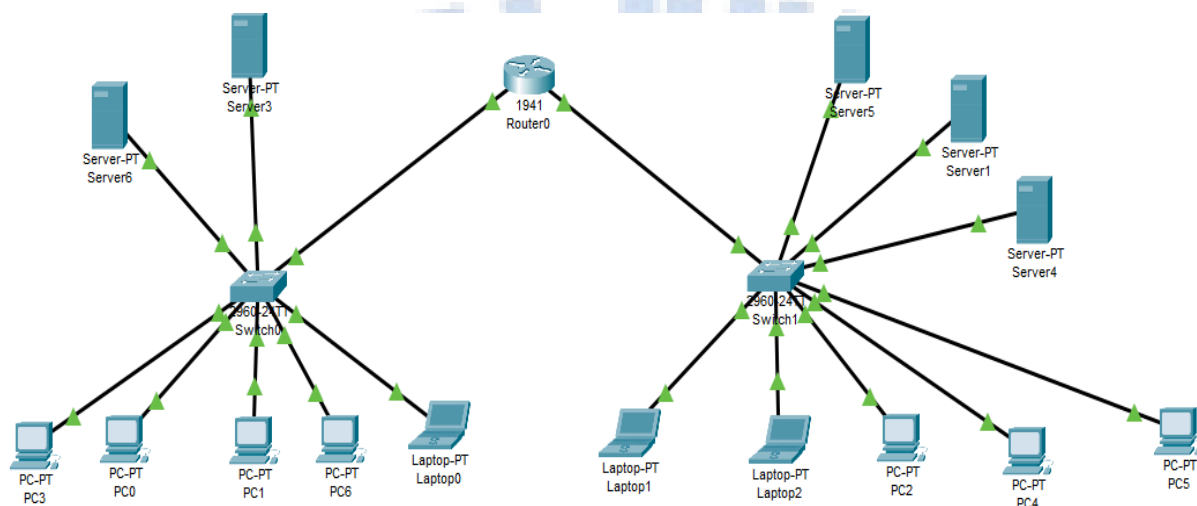


Figure 02

Do the following:

- The IPs should be assigned to the computer using static method and to the router using CLI. The Network on one side of FastEthernet should like this XX.XX.YY.0 i.e. your roll number like 3879(38.79.1.0) and on another side it should be 3880(38.80.2.0).
- Run the command of show run on Switch0 and Switch1 and take a screenshot of it.
- Verify SSH and assign IP to another router interface. It should be done through PC2. Take a screenshot of it.

Lab Exercise – III

Implement the topology given below on cisco packet tracer:

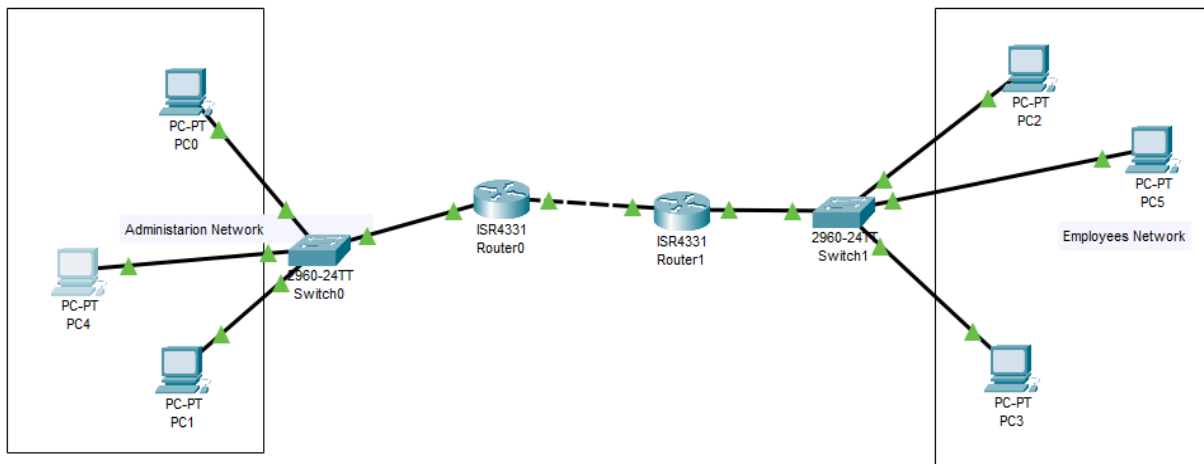


Figure 03

1. Prevent PCs in the network from communicating with any device in the **Employee** network. But, **Administration** should be able to communicate with the Employees.
2. Only allow any two PC's in the **Employee** network (for example: as a GM and Manager communicates with **Administration**) to access and communicate with the **Administration** network, blocking every other device in the **Employee** network.