

Computer Networks

LAB#06




23K-2001


BCS-5J

Q1:


Q1

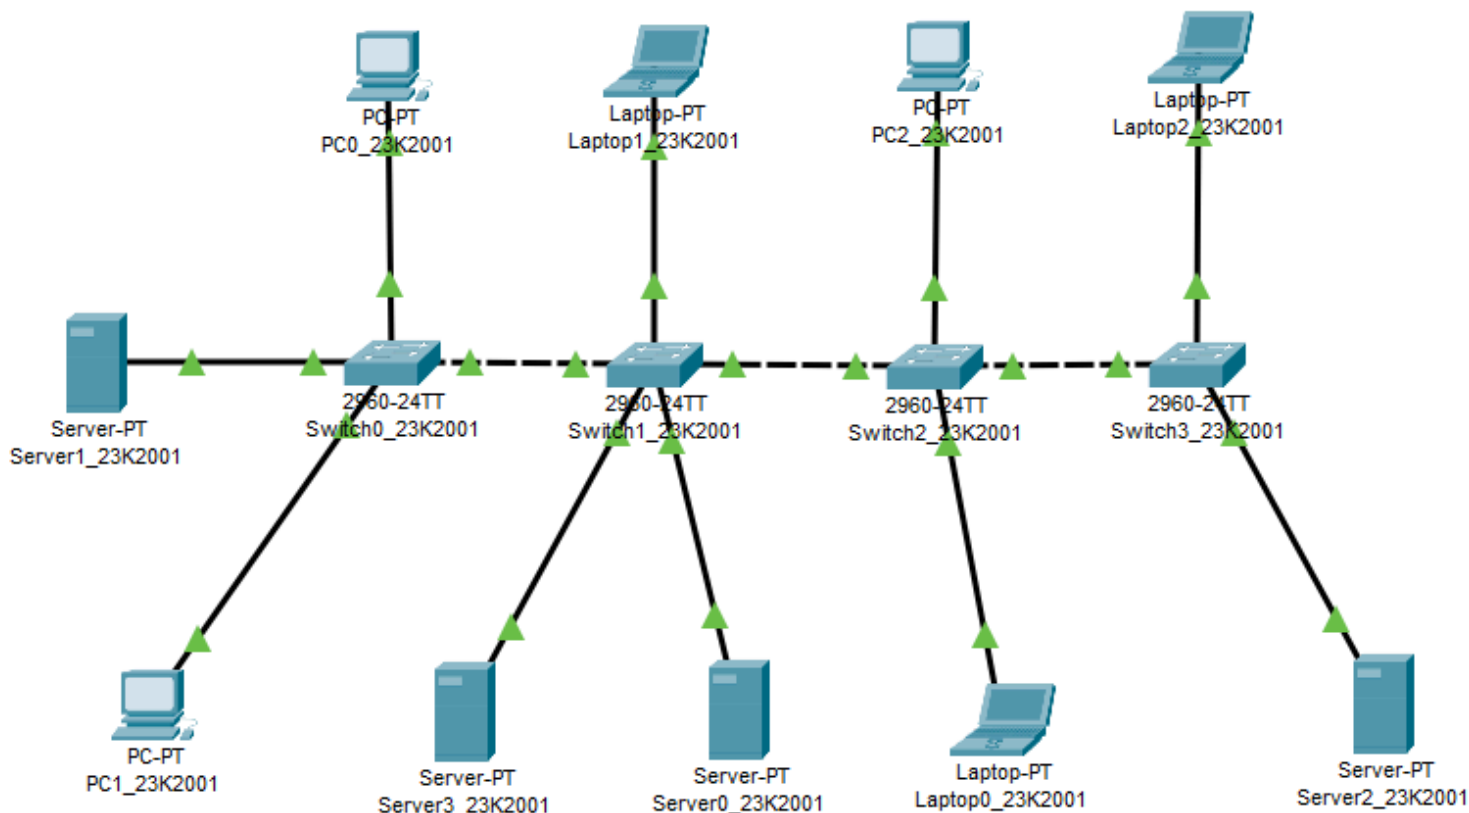

23K-2001

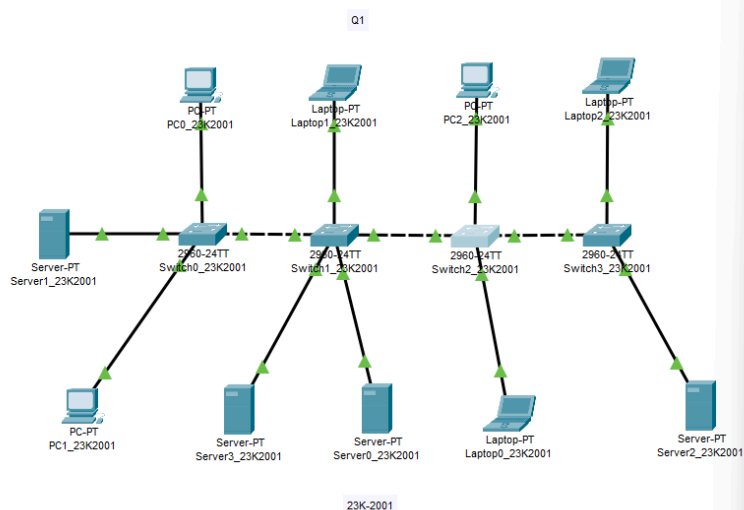

23K-2001

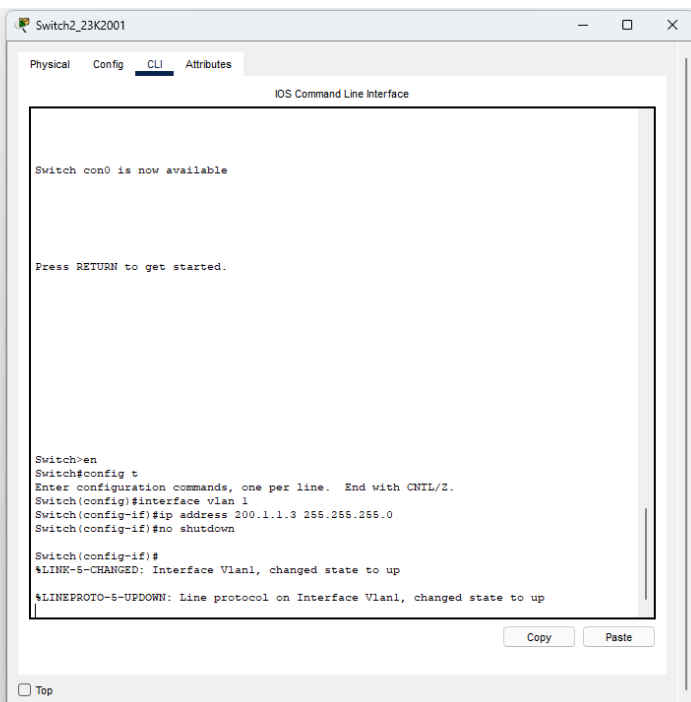

PC0_23K2001

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 200.1.1.5

Subnet Mask 255.255.255.0

Default Gateway 200.1.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::260:3EFF:FE43:90B7

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

```
graph TD
    PC0_23K2001 --- S1(( )) --- Switch0_23K2001
    Switch0_23K2001 --- S2(( )) --- Server1_23K2001
    Switch0_23K2001 --- S3(( )) --- PC1_23K2001
    Switch0_23K2001 --- S4(( )) --- Server3_23K2001
```

Q1

PC0_23K2001 Laptop-PT Laptop1_23K2001 PC2_23K2001 Laptop-PT Laptop2_23K2001

Server-PT Server1_23K2001 2960-24TT Switch0_23K2001 PC-PT PC1_23K2001 Server-PT Server3_23K2001

PC1_23K2001

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 200.1.1.12

Pinging 200.1.1.12 with 32 bytes of data:

Reply from 200.1.1.12: bytes=32 time<1ms TTL=128
Reply from 200.1.1.12: bytes=32 time<1ms TTL=128
Reply from 200.1.1.12: bytes=32 time<1ms TTL=128
Reply from 200.1.1.12: bytes=32 time<1ms TTL=128

Ping statistics for 200.1.1.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Switch3_23K2001

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

Switch>en
Switch#config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface vlan 1
Switch(config-if)#ip address 200.1.1.4 255.255.255.0
Switch(config-if)#no shutdown

Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up


%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up


Switch(config-if)#end
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch3(config)#hostname Switch3
Switch3(config)#
%SYS-5-CONFIG_I: Configured from console by console

Switch3(config)#line vty 0 15
Switch3(config-line)#password cisco
Switch3(config-line)#login
Switch3(config-line)#end
Switch3#
%SYS-5-CONFIG_I: Configured from console by console

Switch3#
```

☐ Top

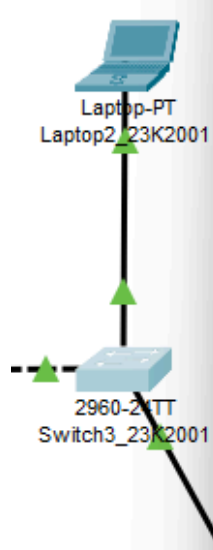

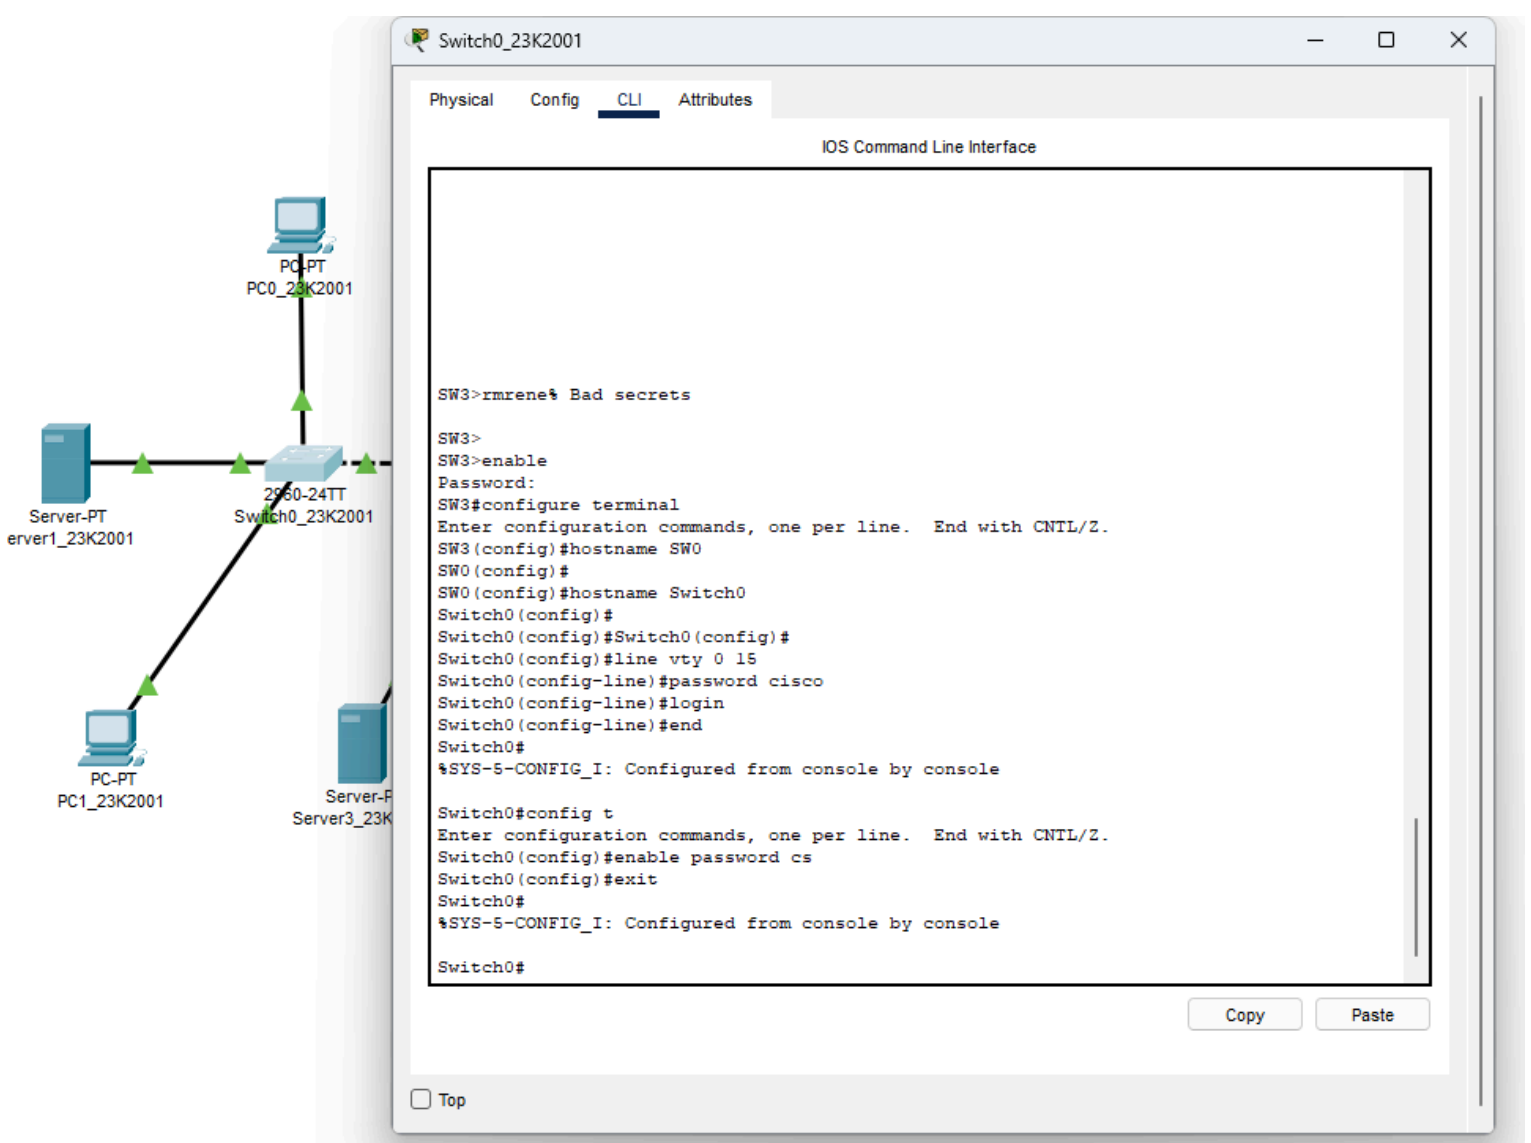

The network diagram shows a central switch, Switch0_23K2001 (2960-24TT), connected to four devices: Server-PT erver1_23K2001, PC-PT PC0_23K2001, PC-PT PC1_23K2001, and Server-PT Server3_23K2001. The CLI window for Switch0_23K2001 shows the following commands and output:


```
SW3>rmrne% Bad secrets

SW3>
SW3>enable
Password:
SW3#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW3(config)#hostname SW0
SW0(config)#
SW0(config)#hostname Switch0
Switch0(config)#
Switch0(config)#Switch0(config)#
Switch0(config)#line vty 0 15
Switch0(config-line)#password cisco
Switch0(config-line)#login
Switch0(config-line)#end
Switch0#
%SYS-5-CONFIG_I: Configured from console by console

Switch0#confi t
Enter configuration commands, one per line. End with CNTL/Z.
Switch0(config)#enable password cs
Switch0(config)#exit
Switch0#
%SYS-5-CONFIG_I: Configured from console by console

Switch0#
```

Q1

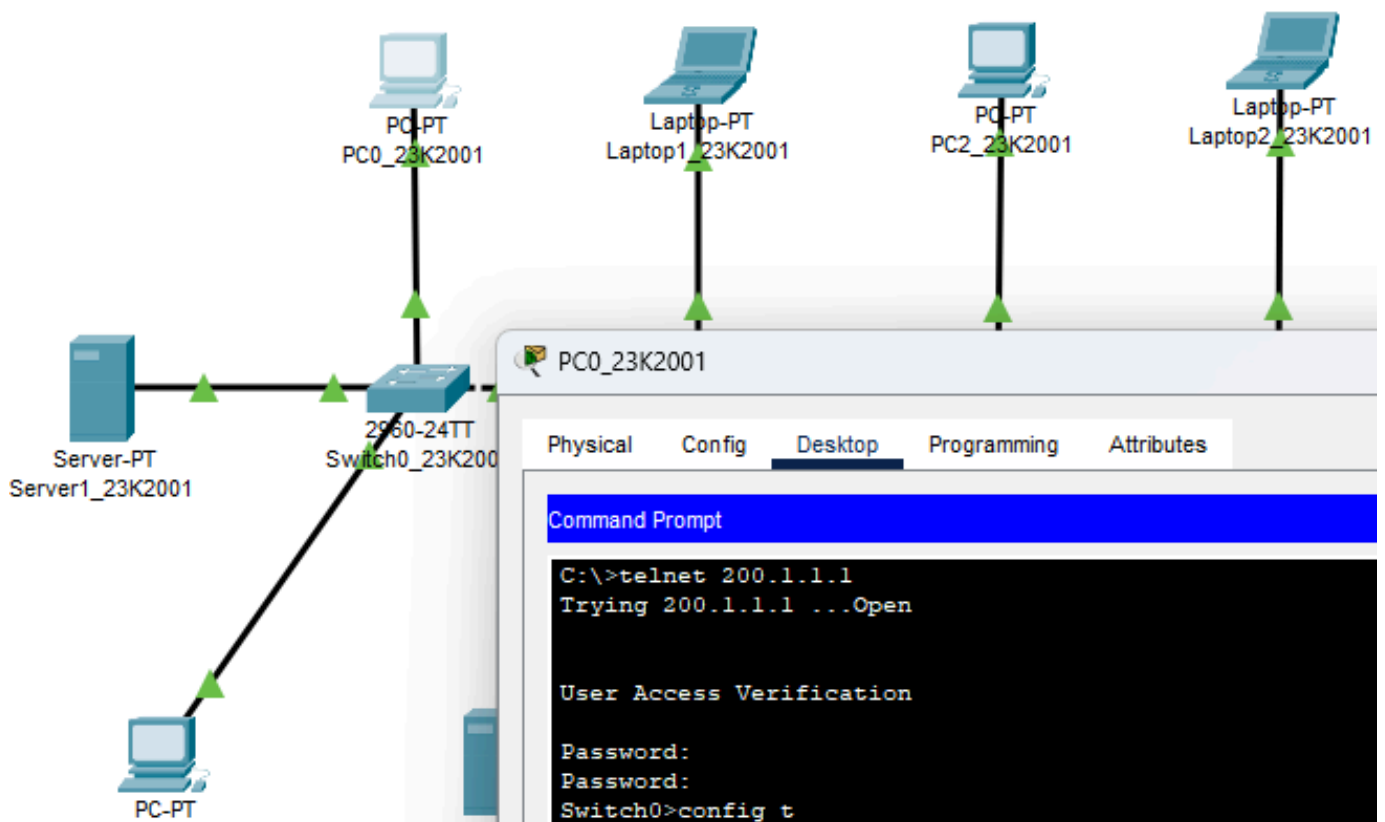

The network diagram shows a central switch, Switch0_23K2001 (2960-24TT), connected to five devices: Server-PT Server1_23K2001, PC-PT PC0_23K2001, Laptop-PT Laptop1_23K2001, PC-PT PC2_23K2001, and Laptop-PT Laptop2_23K2001. The desktop window for PC0_23K2001 shows the following commands and output:


```
Command Prompt

C:\>telnet 200.1.1.1
Trying 200.1.1.1 ...Open


User Access Verification

Password:
Password:
Switch0>confi t
```


Q1

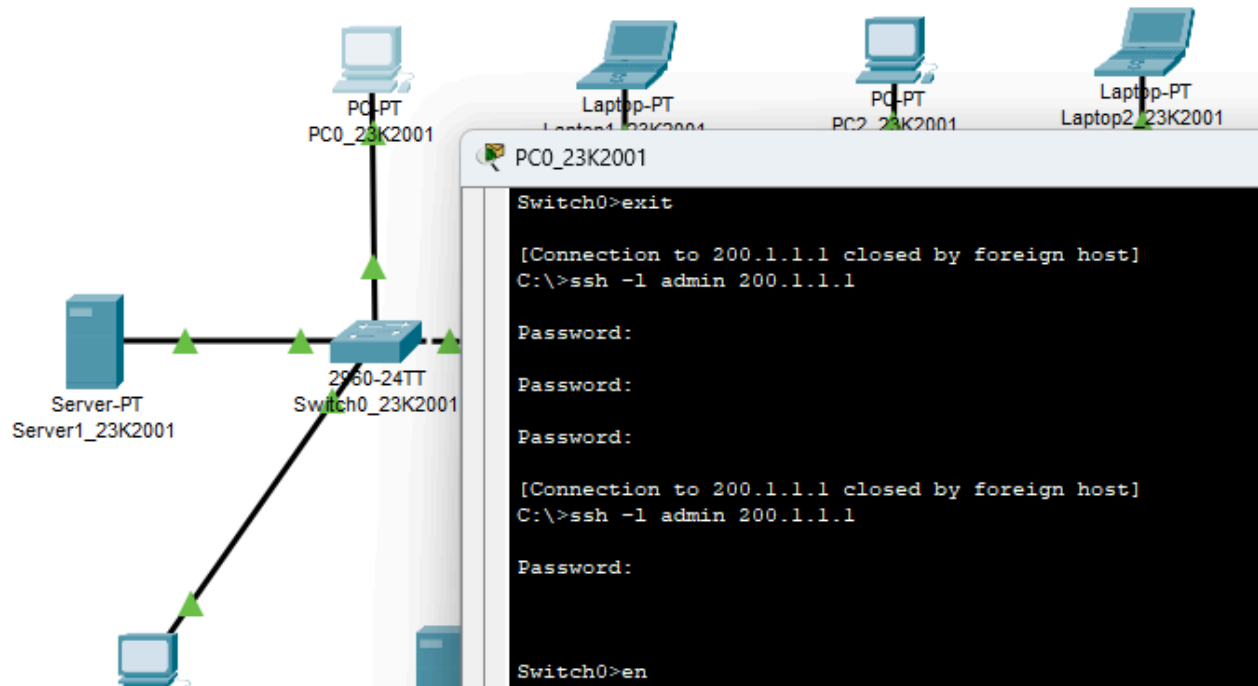

Changing IP of Switch1 from Laptop1

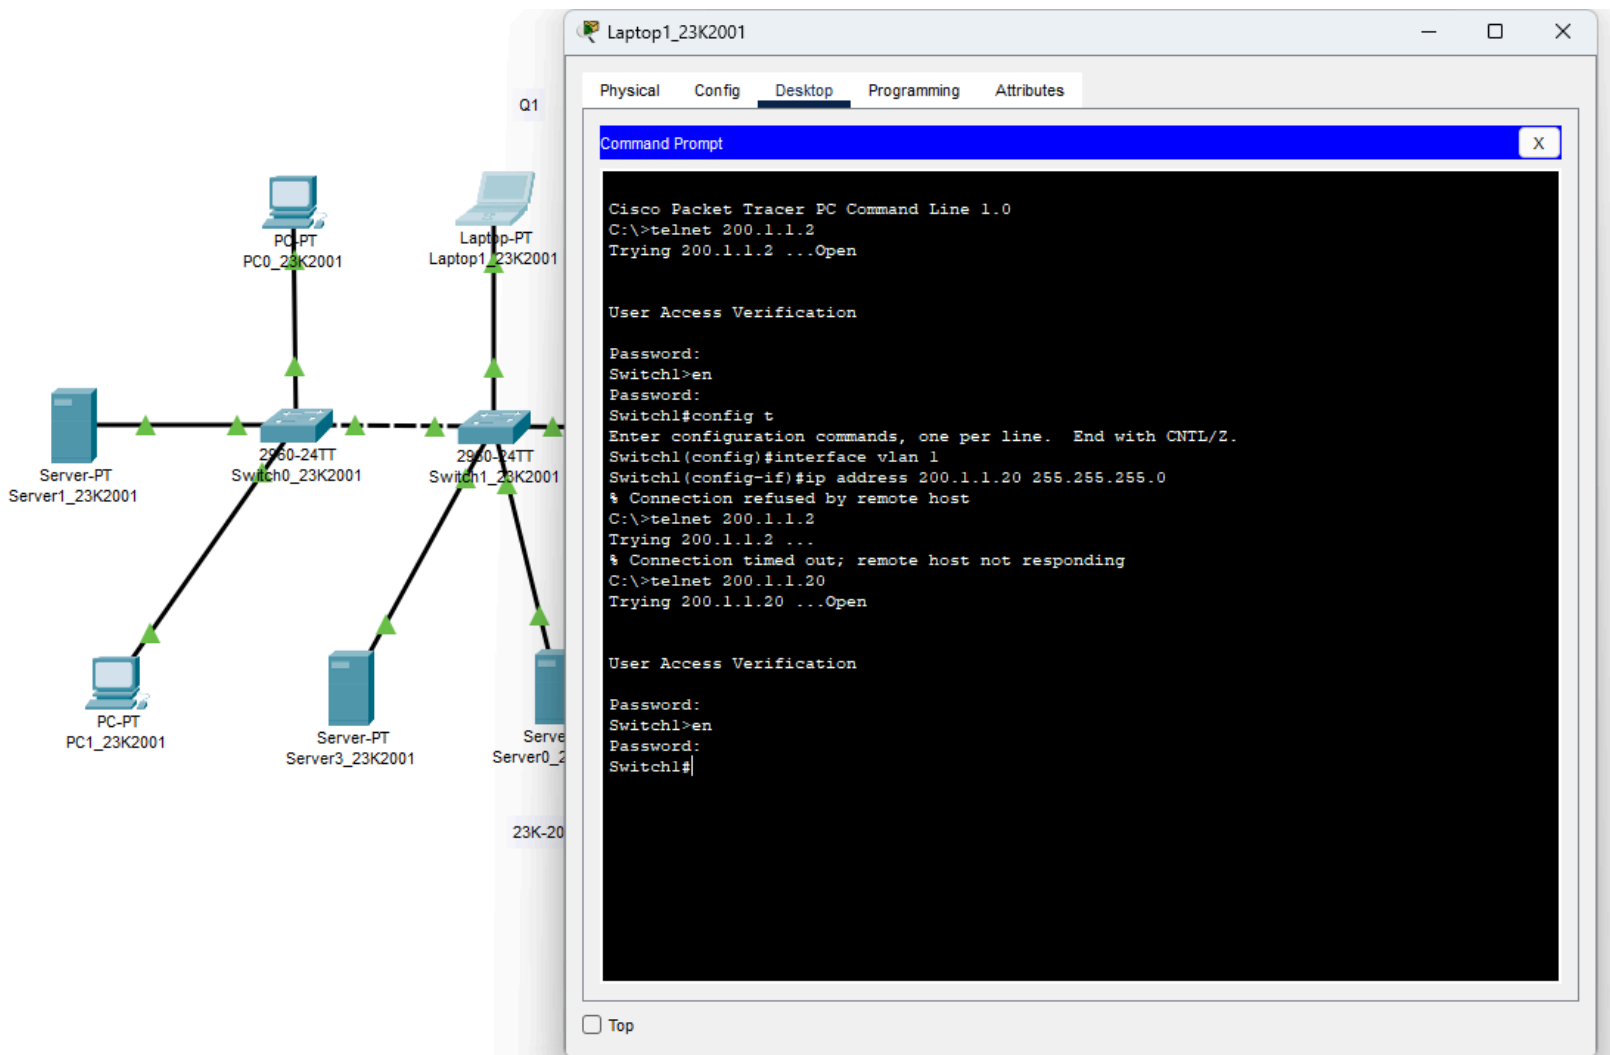

Changing IP of Switch2 from Laptop0

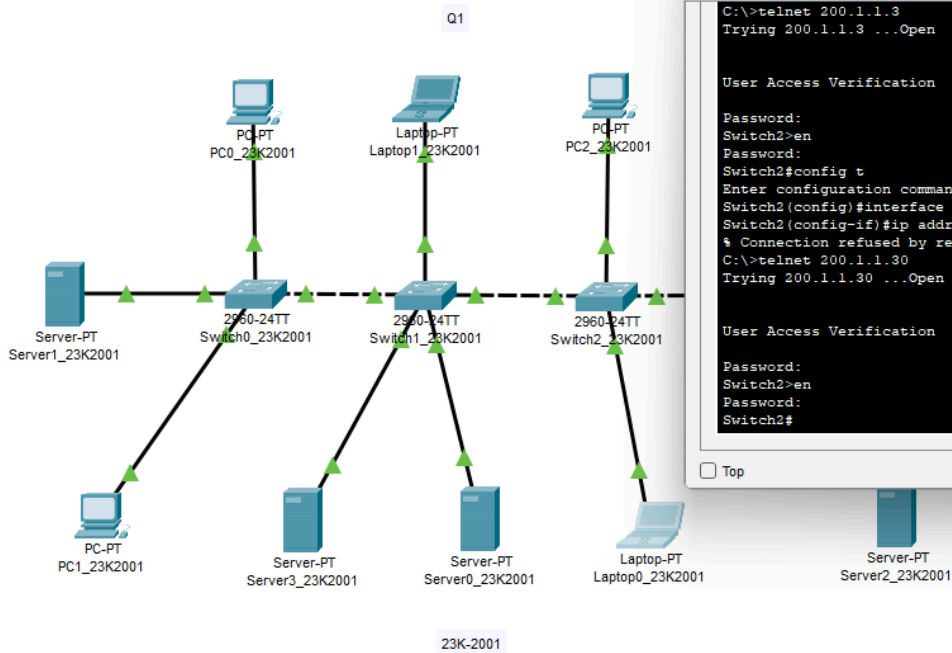

```
Laptop0_23K2001
C:\>telnet 200.1.1.3
Trying 200.1.1.3 ...Open


User Access Verification

Password:
Switch2>en
Password:
Switch2#config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch2(config)#interface vlan 1
Switch2(config-if)#ip address 200.1.1.30 255.255.255.0
% Connection refused by remote host
C:\>telnet 200.1.1.30
Trying 200.1.1.30 ...Open



User Access Verification


Password:
Switch2>en
Password:
Switch2#
```

Q2:

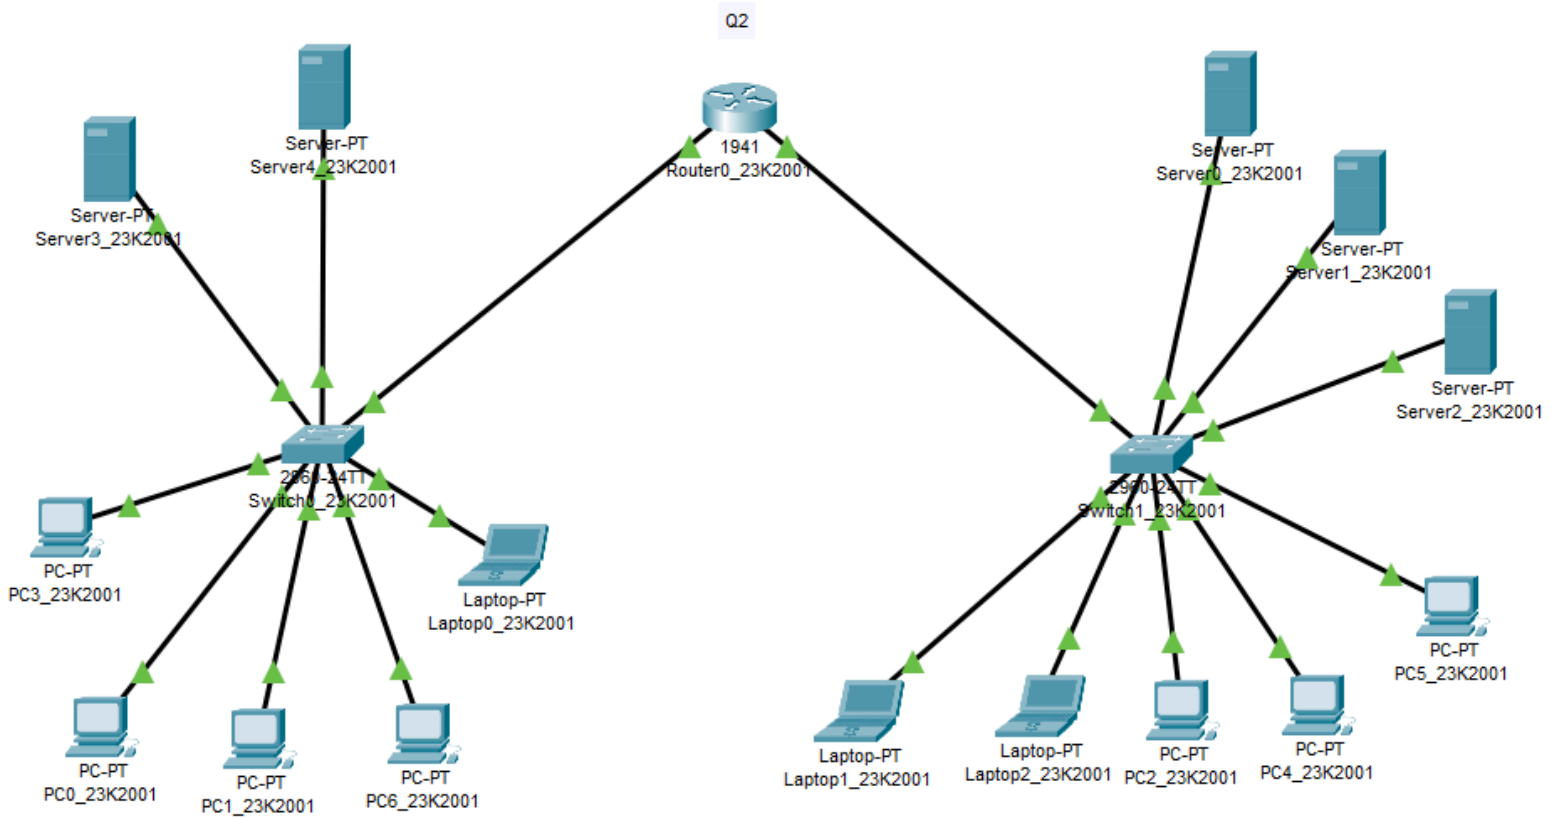

23K2001

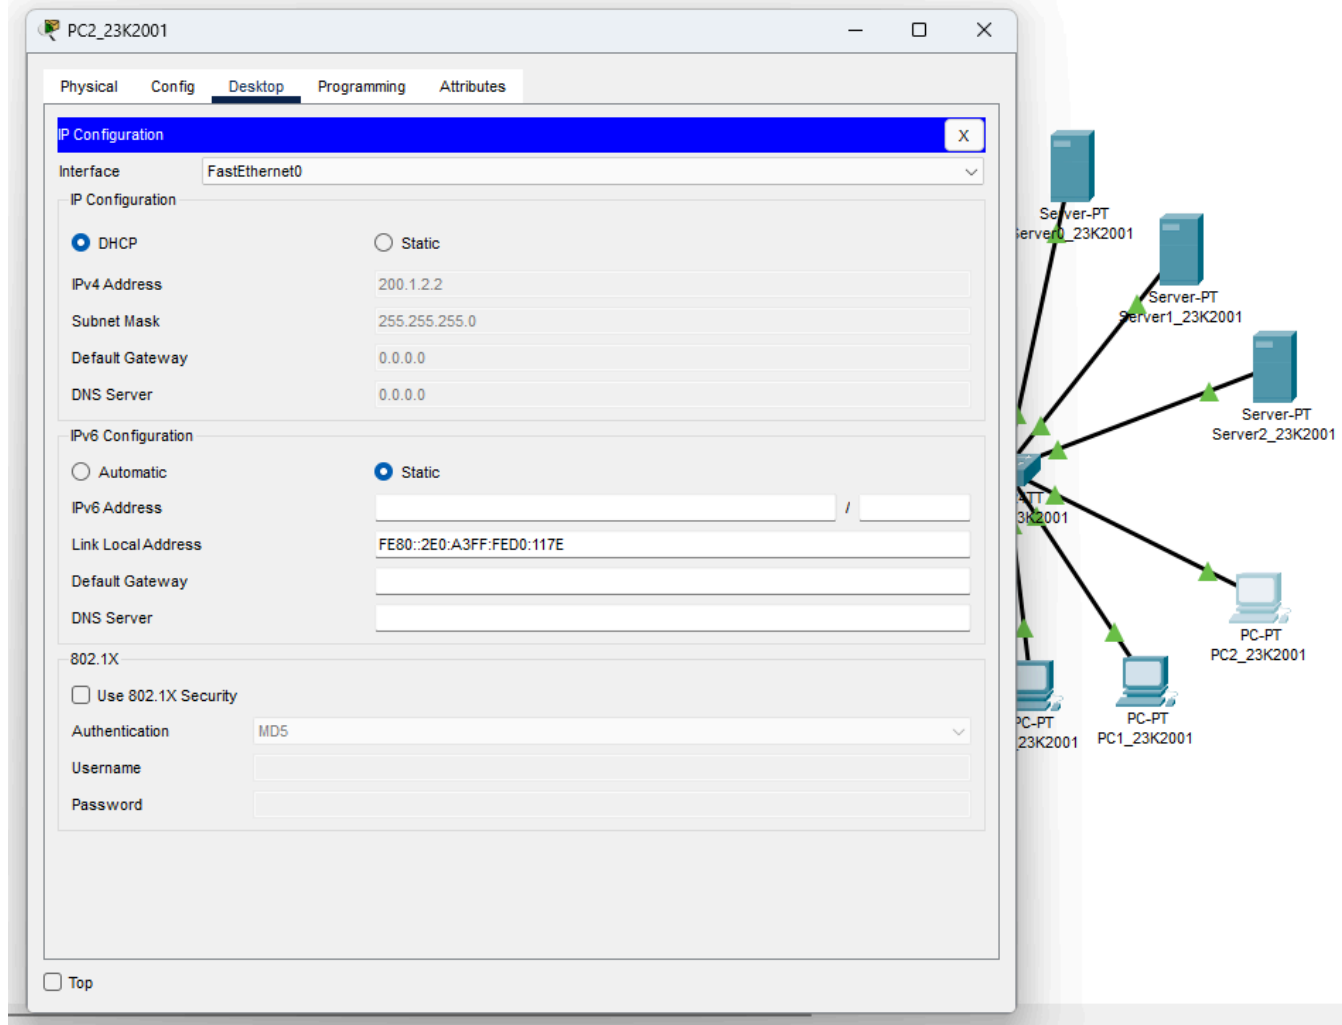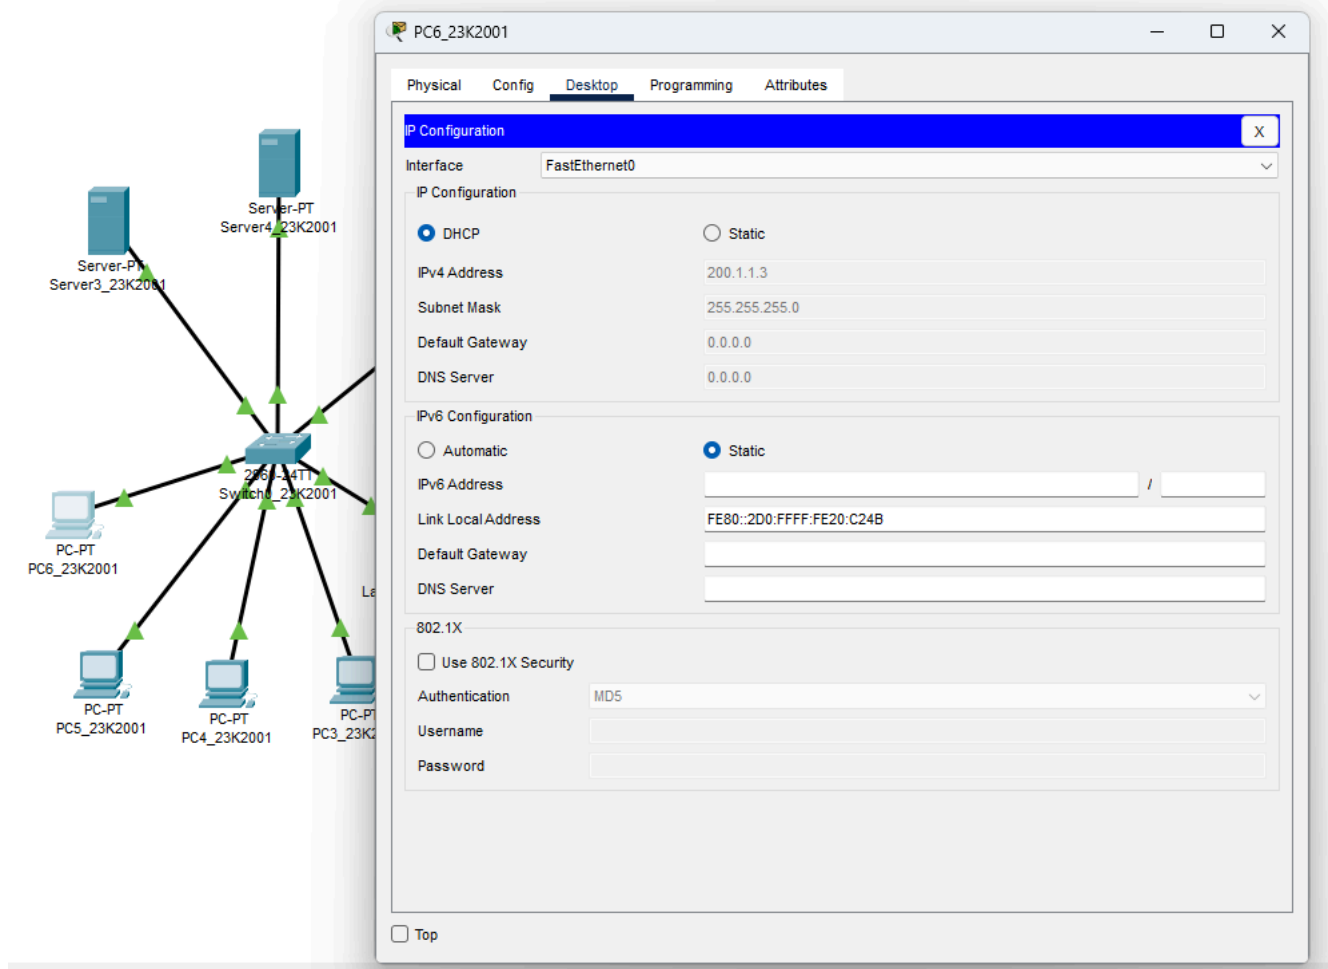

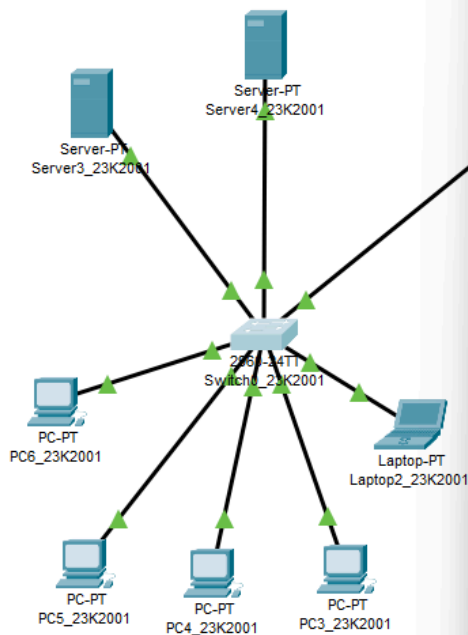

Switch0_23K2001

Physical Config **CLI** Attributes

IOS Command Line Interface

```

%LINK-S-CHANGED: Interface FastEthernet0/8, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/8, changed state to up

Switch>show run
^
% Invalid input detected at '^' marker.

Switch>en
Switch#show run
Building configuration...

Current configuration : 1120 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
!
interface FastEthernet0/3
!
Switch#D
  
```

Copy Paste

☐ Top

Switch1_23K2001

Physical Config **CLI** Attributes

IOS Command Line Interface

```


%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up
%LINK-S-CHANGED: Interface FastEthernet0/8, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/8, changed state to up
%LINK-S-CHANGED: Interface FastEthernet0/9, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/9, changed state to up

Switch>en
Switch#show run
Building configuration...

Current configuration : 1120 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
!
interface FastEthernet0/2
--More--
  
```

Copy Paste

☐ Top

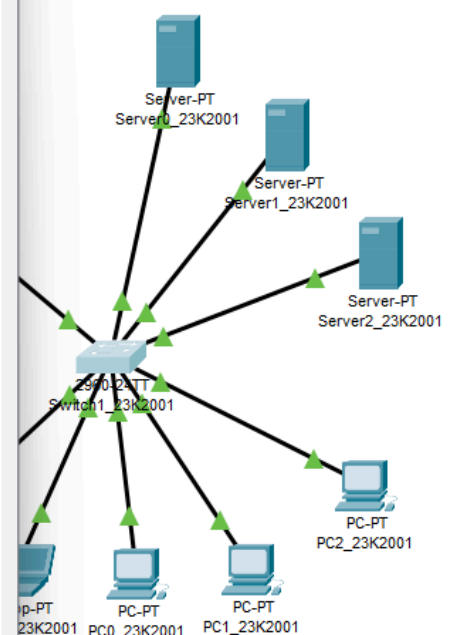

Q3:

