






Power Supply

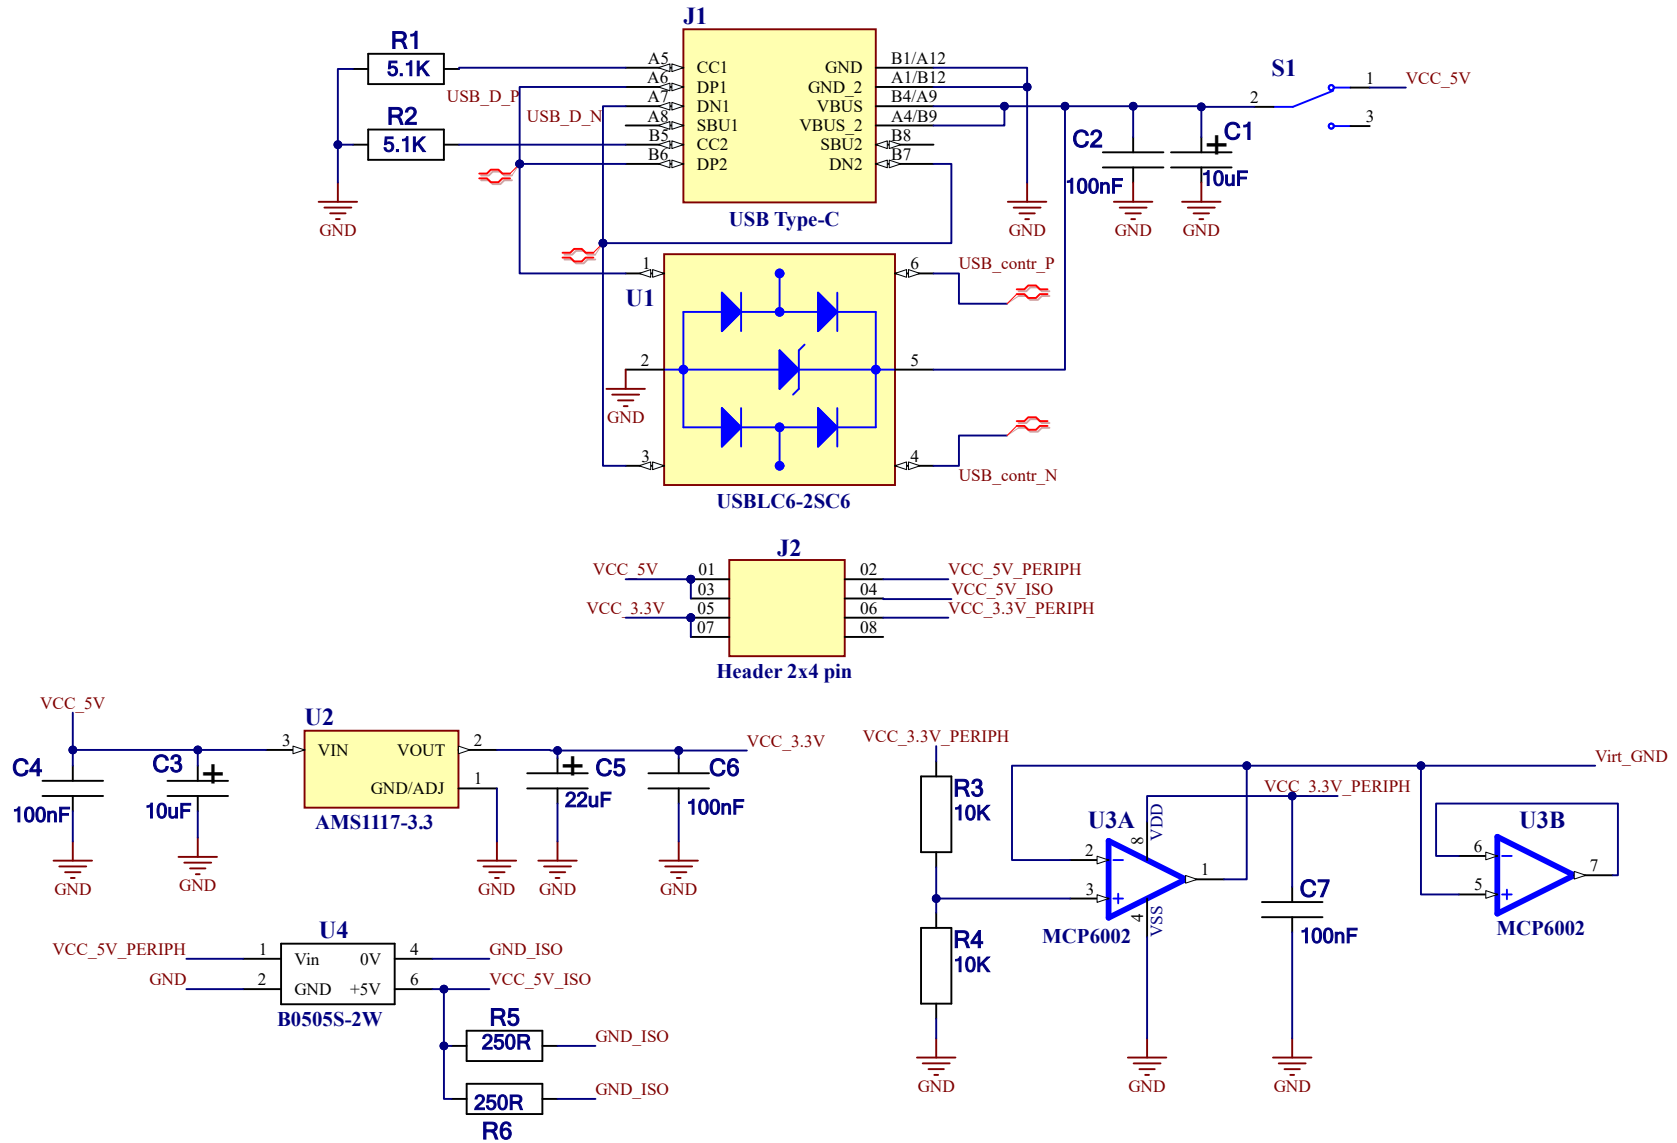


Input + Attenuators

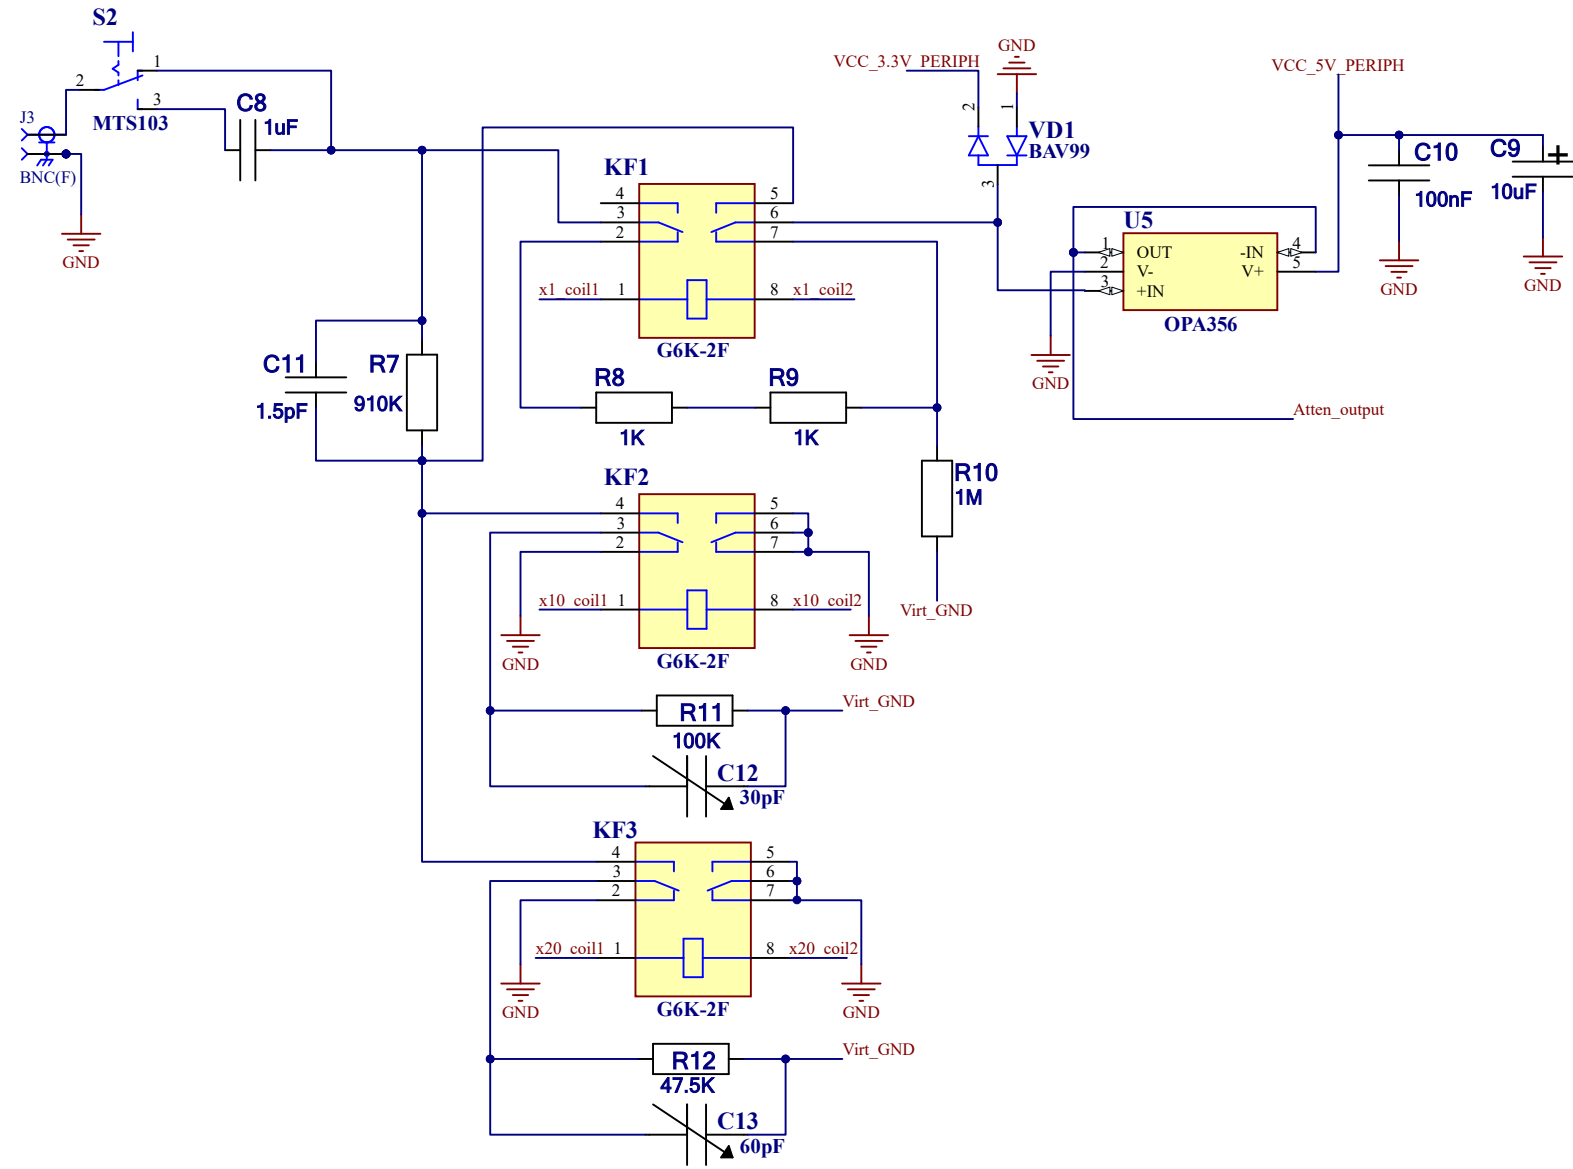

Relay switcher

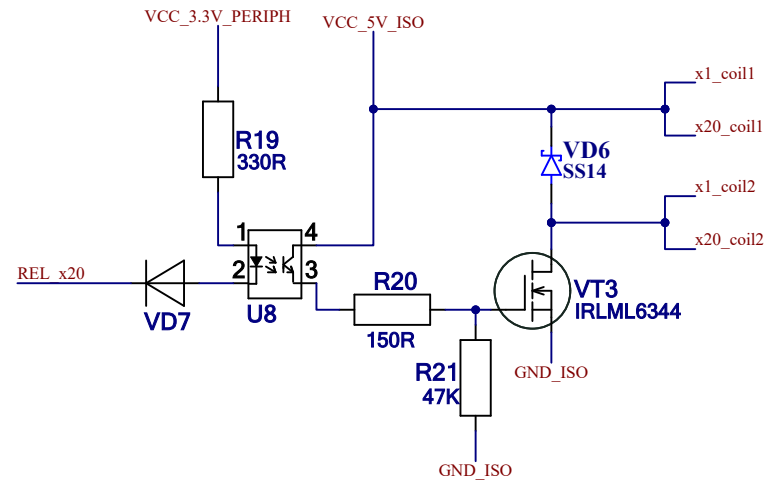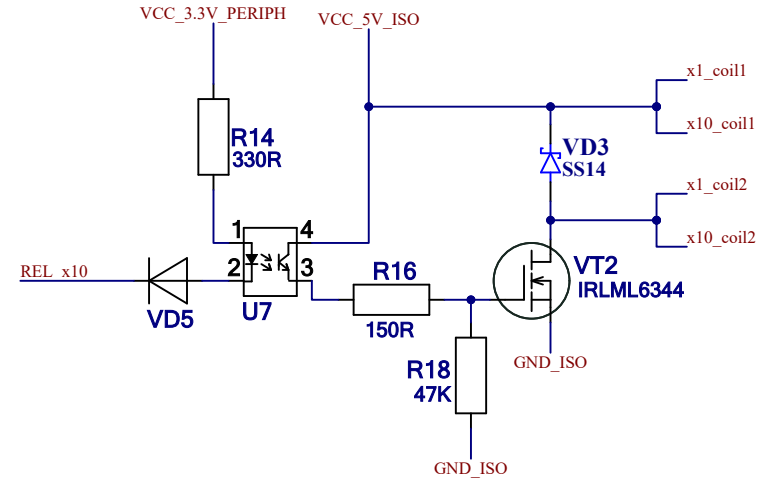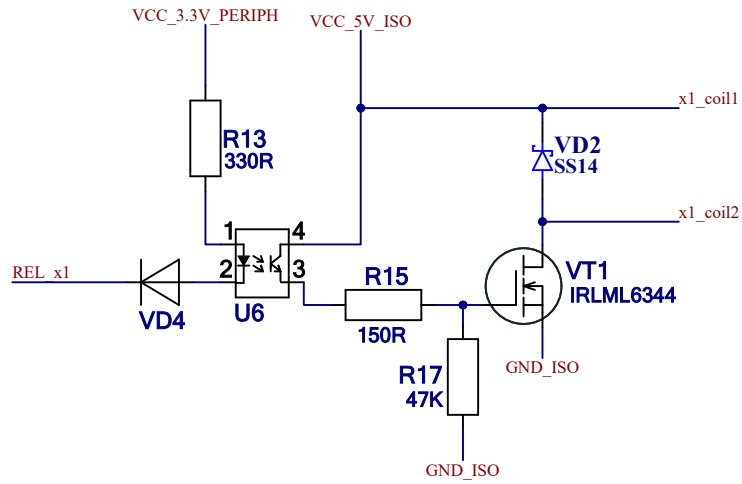

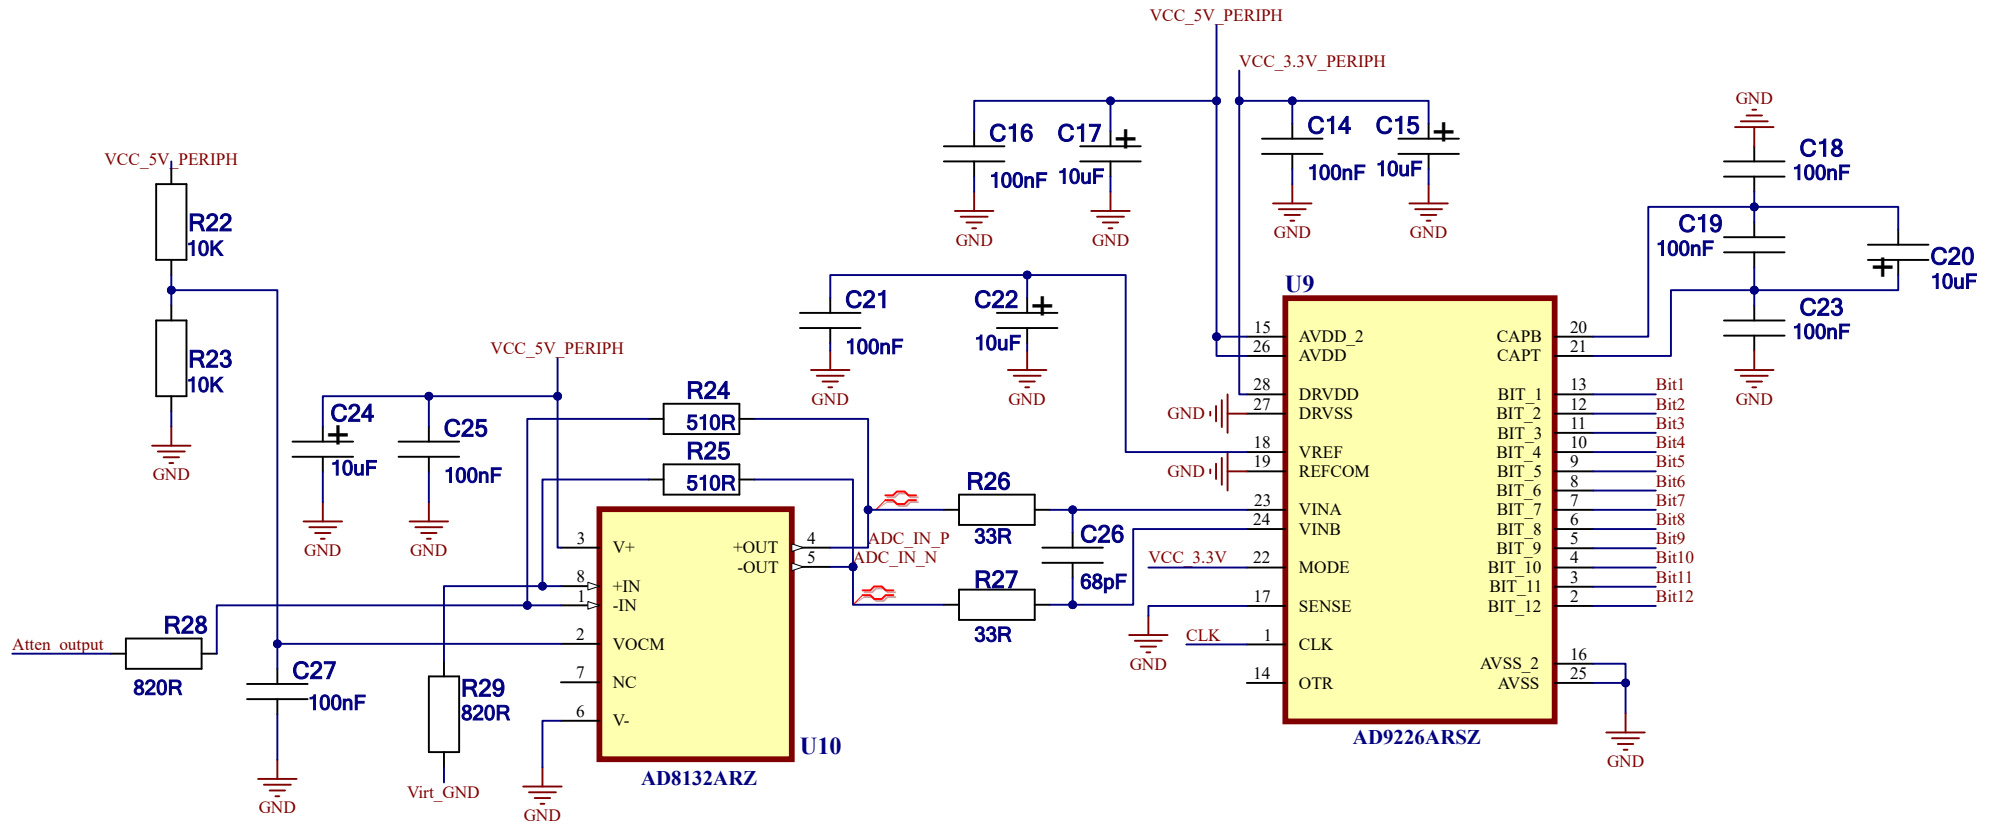


VDD decoupling capacitors

VCC 3.3V

C28 C29 C30 C31 C32 C33 C34 C35 C36 C37 C38 C39

GND

C32-C42 0603 100nF C31 0805 4.7uF

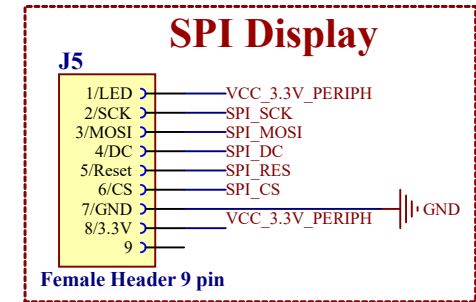

Buttons

The image shows four circuit diagrams for push buttons, each connected to a 3.3V peripheral supply (VCC_3.3V_PERIPH) through a 10K resistor (R35, R36, R38, R39). The buttons are represented by symbols with pins 1, 2, 3, and 4. Pins 1 and 2 are connected to the supply and the other button terminal. Pins 3 and 4 are connected to ground (GND).

- BTN_AUTO:** The button symbol has pins 1 and 2 connected to the supply and the other button terminal. Pins 3 and 4 are connected to ground (GND).
- BTN_MODE:** The button symbol has pins 1 and 2 connected to the supply and the other button terminal. Pins 3 and 4 are connected to ground (GND).
- BTN_UP:** The button symbol has pins 1 and 2 connected to the supply and the other button terminal. Pins 3 and 4 are connected to ground (GND).
- BTN_DOWN:** The button symbol has pins 1 and 2 connected to the supply and the other button terminal. Pins 3 and 4 are connected to ground (GND).

