




CCNA CHEAT SHEET

STP Root Bridge Election

Manual Configuration

Election can be RIGGED by manually configuring a Bridge Priority Value (0-61440 in increments of 4096)

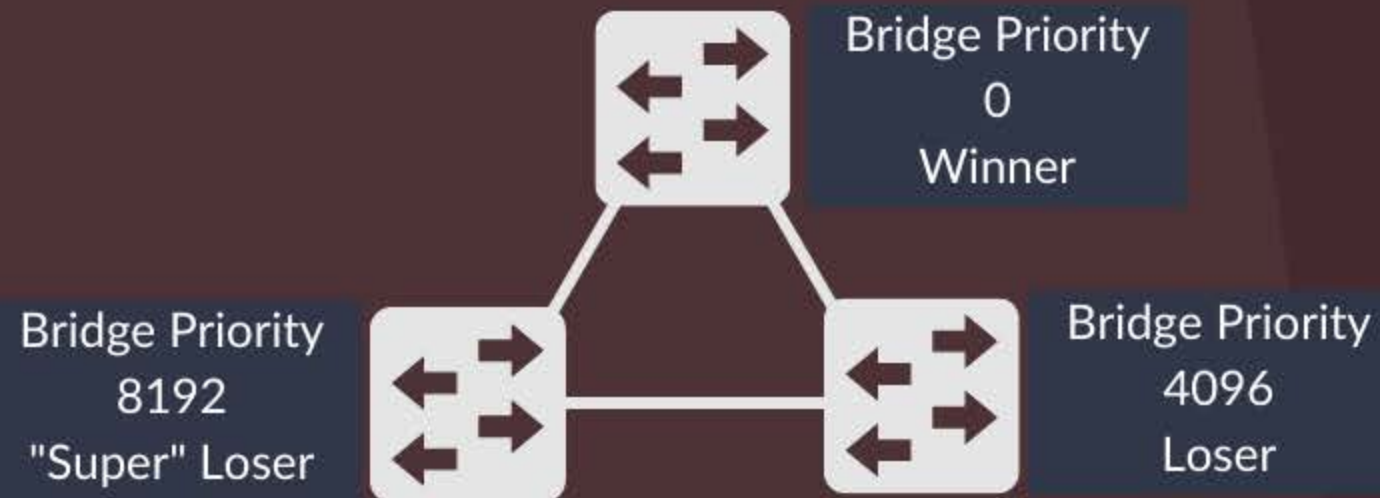

Defaults and MAC

In a case where all priority values are the same, The lowest MAC address will be the deciding factor



Super Loser is not a STP term just an expression to demonstrate the strength of the particular switches value.

