



CCNA CHEAT SHEET


IPv6 Addressing Flags



No Flag

Information provided from the router is enough for the host to generate an IPv6 address.


Use SLAAC

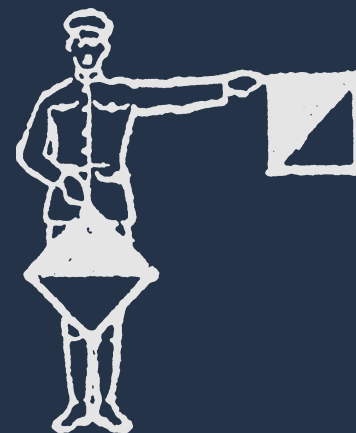

Other-Config Flag

Some address information is learned from the Router. "Other" information can be learned from a DHCPv6 server.

Use SLAAC and DHCPv6

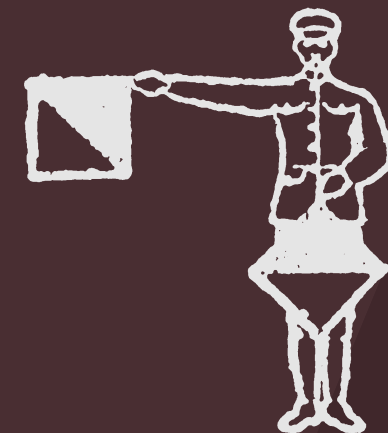

Managed-Config Flag

All information is "Managed" by a DHCPv6 server. Use it for all address details.

Use DHCPv6