CCNA CHEAT SHEET

The Beauty of Hot Standby Router Protocol

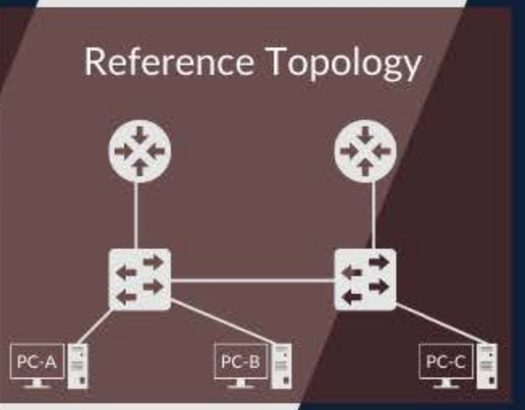

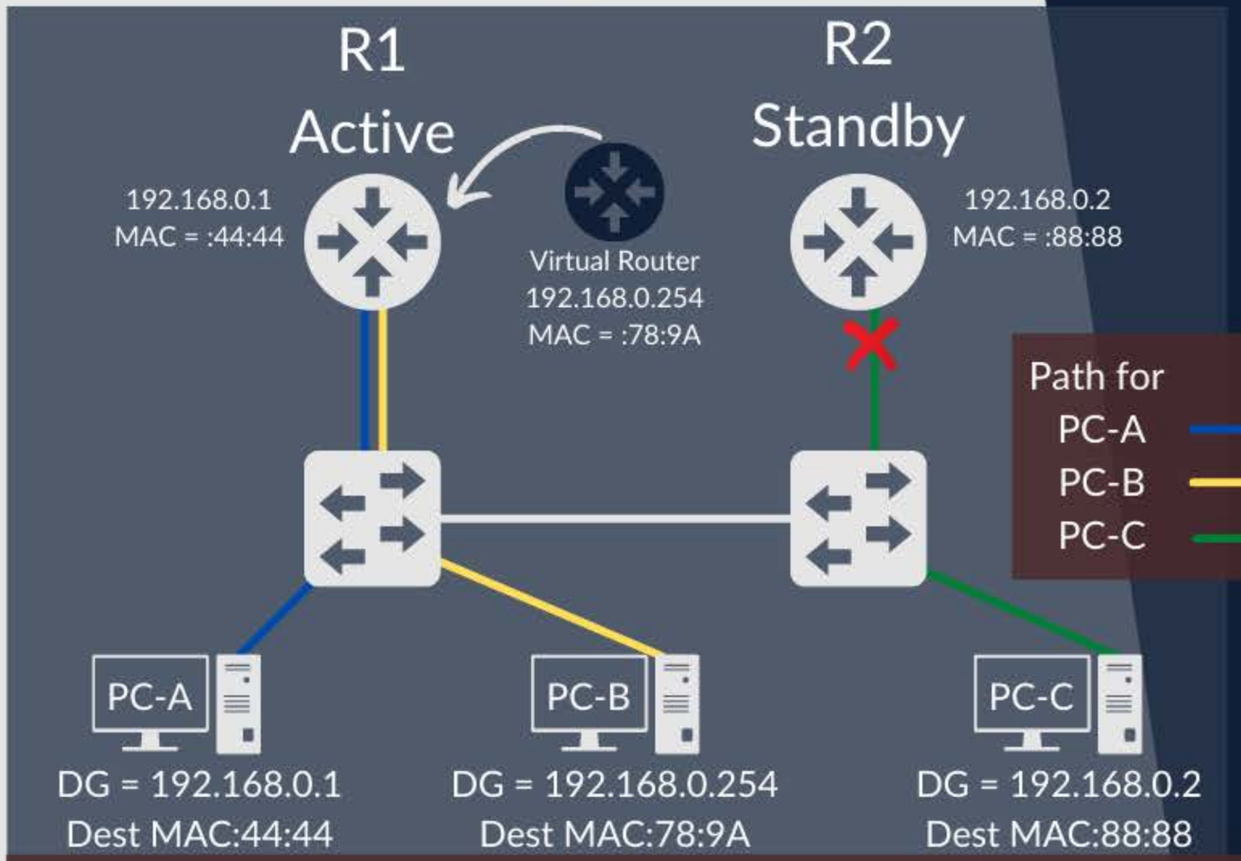

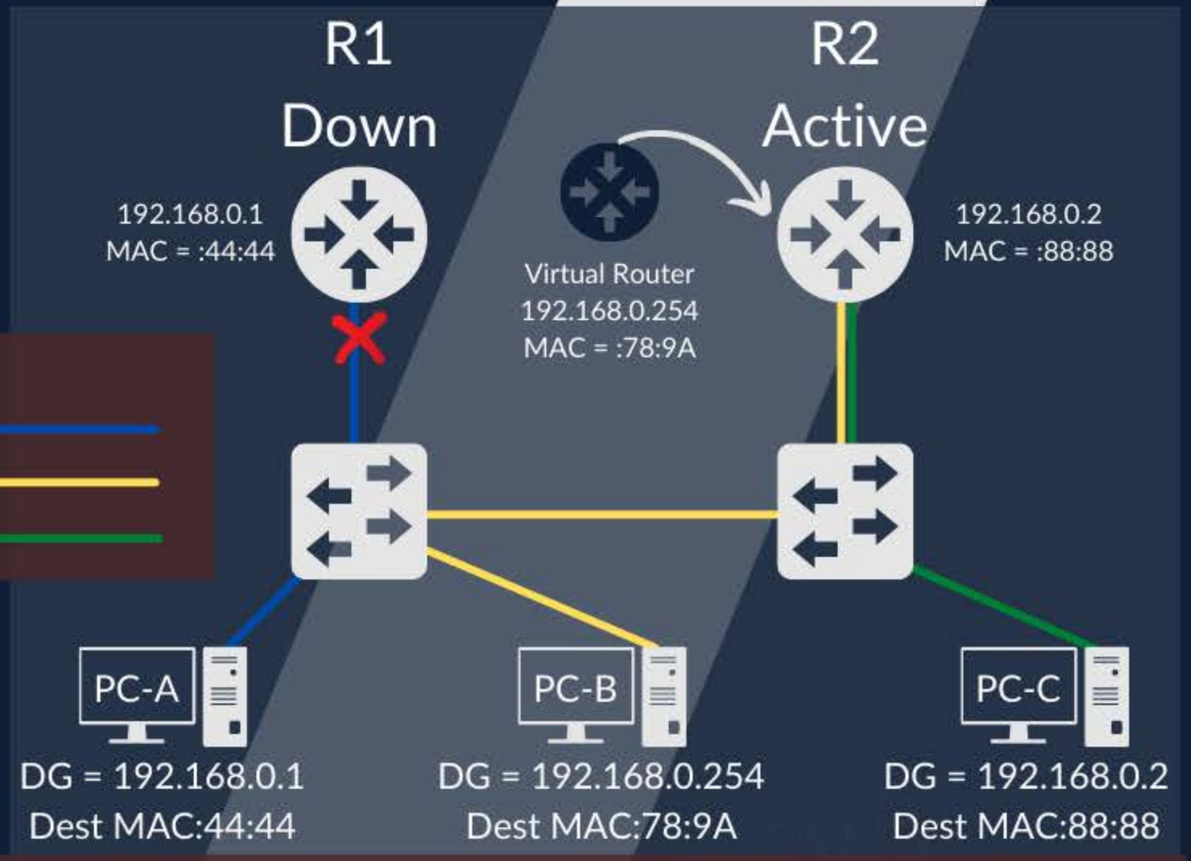

HSRP Creates a virtual router with a virtual MAC address. When this is used as the default gateway. PCs no longer need to be reconfigured with a new DG address when the active router goes down (as seen with PC-B)