

SAUDI ARABIAN OIL COMPANY			
OPRNS			
PMT	T.M		
CERT	K.O		
ENG	S.S		
DESCRIPTION	ISSUED FOR REVIEW		
	ISSUED FOR CONSTRUCTION		
	ISSUED FOR CONSTRUCTION		
JO / EWO	10-08643-0005		
DATE	09-Sep-22		
REV.	00A		
	00		
	0F1		
DISCIPLINE ENGINEER			
S. SASAKI			
DATE: 14-Aug-23			
PROJECT ENGINEER			
T. MINE			
DATE: 14-Aug-23			
CERTIFIED			
K. OGAWA			
DATE: 14-Aug-23			
CONSTRUCTION AGENCY			
DATE:			
OPERATIONS			
DATE:			
EDSD VERIFICATION			
CONTROL NUMBER			
BY:			
DATE:			
REVISION CERTIFICATE			
THIS INDICATES THAT REV. NO. 0F1 OF THIS DRAWING IS COVERED FOR ALL APPROVAL/CERTIFICATION REQUIREMENTS, BY DRAWING COMPLETION CERTIFICATE (DOC) NO.			
MECHANICAL DATA SHEET FOR			
WATER/OIL SEPARATOR (WOSEP)			
(A85-D-0001A, A85-D-0001B)			
ZULUF ONSHORE OIL FACILITIES			
ZAFANIYA			
DWG TYPE	PLANT NO.	INDEX	DRAWING NO.
DAT	A85	D	CD-553440-001
			SHT NO.
			1 OF 5
			REV NO.
			0F1
SAUDI ARABIA	JO / EWO	10-08643-0005	

MECHANICAL DATA SHEET FOR WATER/OIL SEPARATOR (WOSEP) A85-D-0001A A85-D-0001B

JGC JOB NO.	0-8887-20-0000	
JGC DOC. NO.	SD-8500-13513-0001	
UNIT	8500	
ISSUE PURPOSE	FOR CONSTRUCTION	
PREP'D	CHK'D	APP'D
E.P	G.E	S.S
JGC CORPORATION		

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE SOLE PROPERTY OF SAUDI ARAMCO. NO REPRODUCTION IN FULL OR IN PART SHALL BE OBTAINED FROM THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF ITS OWNER.

NOZZLE & MANWAY SCHEDULE									
MARK	QTY	SIZE	SERVICE	ASME CLASS	FACE TO C.L. (mm)	REMARKS			
N1	1	20"	WATER/OIL INLET	150# RF SRWN	SEE DWG				
N2	1	6"	OIL OUTLET	150# RF SRWN	SEE DWG				
N3	1	6"	OIL OUTLET	150# RF SRWN	SEE DWG				
N4	1	20"	WATER OUTLET	150# RF SRWN	3230				
N5	1	20"	WATER OUTLET	150# RF SRWN	3230				
N6	1	8"	GAS INLET/OUTLET	150# RF SRWN	SEE DWG				
N7	1	4"	BALANCE	150# RF SRWN	SEE DWG				
N8	1	4"	VENT	150# RF SRWN	SEE DWG				
N9	1	2"	STEAM OUT	150# RF LWN	SEE DWG				
N10	1	2"	STEAM OUT	150# RF LWN	SEE DWG				
N11	1	2"	STEAM OUT	150# RF LWN	SEE DWG				
N12	1	4"	DEPRESS.	150# RF SRWN	SEE DWG				
N13	1	6"	PZV	150# RF SRWN	SEE DWG				
N14	1	6"	PZV	150# RF SRWN	SEE DWG				
N15	1	16"	PUMP MIN FLOW	150# RF SRWN	SEE DWG				
N16	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N17	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N18	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N19	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N20	1	3"	LIT - 1 (DP Type)	300# RF SRWN	SEE DWG				
N21	1	3"	LIT - 1 (DP Type)	300# RF SRWN	SEE DWG				
N22	1	3"	LIT - 2 (DP Type)	300# RF SRWN	SEE DWG				
N23	1	3"	LIT - 2 (DP Type)	300# RF SRWN	SEE DWG				
N24	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N25	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N26	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N27	1	2"	BRIDLE (LEVEL)	300# RF LWN	SEE DWG				
N28	1	10"	SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N29	1	3"	SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N30	1	3"	SACRIFICIAL ANODE	150# RF SRWN	3130	NOTE 11, W/ BLIND FLANGE			
N31	1	3"	SACRIFICIAL ANODE	150# RF SRWN	3130	NOTE 11, W/ BLIND FLANGE			
N32A/B	2	3"	DRAIN	150# RF SRWN	3130				
N33A/B	2	3"	DRAIN	150# RF SRWN	3130				
N34A/B	2	3"	DRAIN	150# RF SRWN	3130				
N35A/B	2	3"	DRAIN	150# RF SRWN	3130				
N36A/B	2	3"	DRAIN	150# RF SRWN	3130				
N37A~D	4	2"	TEST COCKS	150# RF LWN	SEE DWG				
N38A~D	4	2"	TEST COCKS	150# RF LWN	SEE DWG				
N39	1	3"	PT/PAH	300# RF SRWN	SEE DWG				
N40	1	3"	PI	300# RF SRWN	SEE DWG				
N41	1	3"	OIL OUTLET SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N42	1	3"	OIL OUTLET SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N43	1	3"	OIL OUTLET SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N44	1	3"	OIL OUTLET SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N45A/B	2	3"	JETTING WATER	150# RF SRWN	3130				
N46A/B	2	3"	JETTING WATER	150# RF SRWN	3130				
N47A/B	2	3"	JETTING WATER	150# RF SRWN	3130				
N48A/B	2	3"	JETTING WATER	150# RF SRWN	3130				
N49A/B	2	3"	JETTING WATER	150# RF SRWN	3130				
N50	-	-	-	-	-	-			
N51A/B	2	3"	LIT (DP)	300# RF SRWN	SEE DWG				
N52	1	8"	VAPOUR SPARE	150# RF SRWN	SEE DWG	W/ BLIND FLANGE			
N53	-	-	-	-	-	-			
M1	1	30"	MANWAY	150# RF SRWN	SEE DWG	B16.47 SERIES A, W/ BLIND FLANGE & DAVIT			
M2	1	30"	MANWAY	150# RF SRWN	3230	B16.47 SERIES A, W/ BLIND FLANGE & DAVIT			
M3	1	30"	MANWAY	150# RF SRWN	SEE DWG	B16.47 SERIES A, W/ BLIND FLANGE & DAVIT			
M4	1	30"	MANWAY	150# RF SRWN	SEE DWG	B16.47 SERIES A, W/ BLIND FLANGE & DAVIT			

OPERATING CONDITIONS

INTERNAL PRESSURE:
NORMAL: 80 (551.58) psig (kPag)
MAXIMUM: 100 (689.48) psig (kPag)
EXTERNAL PRESSURE:
NORMAL: FV
MAXIMUM: FV
SERVICE:
If other (Specify): LETHAL: NO, H2: NO, CAUSTIC: NO, AMINE: NO, WET SOUR: YES, UTILITY: NO, CYCLIC: NO
TEMPERATURE:
NORMAL: 80 (26.67) °F (°C)
MAXIMUM: 148 (64.44) °F (°C)
SPECIFIC GRAVITY OF LIQUID: 0.8526 (OIL), 0.9787 (WATER)
DATA SHEET TO BE COMPLETED IN ACCORDANCE WITH SAES-D-110.
VESSELS TO BE MANUFACTURED IN ACCORDANCE WITH 32-SAMSS-002 AND APPLICABLE ADDENDUM.

DESIGN CONDITIONS

ASME DESIGN CODE & EDITION: ASME SEC. VIII DIV. 1, 2021 ED. + U STAMP
INTERNAL PRESSURE: 130 (896.32) psig (kPag)
EXTERNAL PRESSURE/TEMPERATURE: 15 (103.42) @ 200 (93.33) (NOTE 24) psi (kPa) / °F (°C)
INTERNAL TEMPERATURE: 200 (93.33) °F (°C)
M.D.M.T.: 34 (1.11) °F (°C)
REINFORCEMENT: Integrally reinforced openings
WIND: PER SP-0000-13100-0002
EARTHQUAKE: PER SP-0000-13100-0001
CORROSION ALLOWANCE: 0.125 (3.2) in (mm)
RADIOGRAPHY: ☐ YES ☒ NO ☐ CODE
IMPACT TESTING (IT): ☒ YES ☐ NO ☐ CODE ☐ SERVICE
P.W.M.T.: ☒ YES ☐ NO ☐ CODE ☐ SERVICE
I. T. TEMPERATURE: PER CODE / 32-SAMSS-004
I. T. ENERGY AVE./MIN: PER CODE / 32-SAMSS-004
It is the responsibility of the contractor to ensure filling of this data sheet in compliance to the detailed company standard and material specifications

MATERIALS OF CONSTRUCTION (Note 20)


COMPONENT: ASME NO:
SHELL:
- BASE MATERIAL SA 516 Gr. 70N HIC
- CLADDING OR OVERLAY N/A
BOOT:
- BASE MATERIAL N/A
- CLADDING OR OVERLAY N/A
HEADS:
- TYPE 2:1 ELLIPSOIDAL
- BASE MATERIAL SA 516 Gr. 70N HIC
- CLADDING OR OVERLAY N/A
NOZZLE FLANGES: SA 350 Gr. LF2 CL.1
NOZZLE NECK (PIPE/PLATE/FORGE): SA 108 Gr. 8M (SEAMLESS) / SA 516 Gr. 70N HIC / SA 350 Gr. LF2 CL.1
INTERNAL ATTACHMENT CLIPS: SA 516 Gr. 70N HIC
EXTERNAL ATTACHMENT CLIPS: SA 516 Gr. 70N
STUD BOLTS: SA 193 Gr. 87M
NUTS: SA 194 Gr. 2HM
REMOVABLE INTERNALS / (BY OTHERS): 316L SS / BY OTHERS
SUPPORT (SADDLE & PAD): SA 516 Gr. 70N
SLIDING PLATE: SA 36
BOLTS/NUTS (INTERNAL): SA 193 Gr. 87M / SA194 Gr. 8M
FITTINGS (EXTERNAL): SA 234 Gr. WPB N (SEAMLESS)
GASKETS: (NOTE 3)
LIFTING LUGS/TRUNNIONS: SA 516 Gr. 70N
ANCHOR BOLTS (BY OTHERS): F1554 Gr. 36
NAMEPLATE/BRAKET: 304 SS / SA 516 Gr. 70N
GROUNDING LUGS: 304 SS
VORTEX BREAKER: SA 516 Gr. 70N HIC
BAFFLES: N/A
COALESCER PACKS (BY OTHERS): BY OTHERS
OIL COMPARTMENT: SA 516 Gr. 70N HIC
OIL DRAW OFF PAN: N/A

INSULATION FIREPROOFING & PAINTING




INSULATION THICKNESS: 25 (HC) mm
FIREPROOFING THICKNESS: N/A
SHOP PRIME & PAINT: (NOTE 9)
(SAPCS NO): N/A
FIELD PRIME & PAINT: N/A
(SAPCS NO): N/A
ESTIMATED VESSEL WEIGHTS:
SHIPPING/ERECTION: 337,000 kg
EMPTY: 418,000 kg
OPERATING: 1,900,000 kg
TEST: 1,891,000 kg
FABRICATED: 314,000 kg
ACCESSORIES/ATTACHMENTS
INLET DISTRIBUTOR: YES
CP ANODES BRACKET/CLIPS: YES
SLIDING ASSEMBLY: YES
PLATFORM & LADDER CLIPS: YES
INSULATION SUPPORTS: YES
FIREPROOFING SUPPORTS: N/A
SADDLE STIFFENERS: AS REQUIRED
NAMEPLATE W/ BRACKET: YES
GALVANIC ANODES: YES
VORTEX BREAKER: YES
LIFTING LUGS/TRUNNIONS: YES
GROUNDING LUGS: YES
WEIR: N/A
PIPING SUPPORT W/CLIPS: AS REQUIRED
MANWAY LADDER / GRAB RUNGS: YES
VACUUM STIFFENER RINGS: AS REQUIRED
BAFFLES SUPPORTS: N/A
COALESCER PACK W/SUPPORT: YES
WATER AND DESLUDGING DEVICES: YES
PROPRIETARY INTERNALS: YES

REQUISITION NO: R-2151-301
VENDOR: MARITIME INDUSTRIAL SERVICES ARABIA CO. LTD
REVISION VALIDATION
THIS REVISION NO 0F1 IS COVERED, FOR ALL APPROVAL AND CERTIFICATION REQUIREMENTS, PER SAEP-334, UNDER DRAWING COMPLETION CERTIFICATION NO:
DESIGN CERTIFICATION (DESIGN AGENCY)
ENG./DATE S. SASAKI/ 14-Aug-23
CERTIFIED BY/DATE K. OGAWA/ 14-Aug-23
CONST.AGENCY/DATE
OTHER
BY/DATE
REV.NO. DATE ORIGINATOR
00A 09/09/2022 S.S
00 07/03/2023 S.S
0F1 14/08/2023 S.S
JOB ORDER/EWO NO. 10-08643-0005
MECHANICAL DATA SHEET FOR WATER/OIL SEPARATOR (WOSEP) (A85-D-0001A, A85-D-0001B)
ZULUF ONSHORE OIL FACILITIES
SAUDI ARABIAN OIL COMPANY
DRAWING TYPE: DAT
PLANT NO INDEX DRAWING NUMBER SHT. NO. REV. NO.
A85 D CD-553440-001 2 of 5 0F1

SAUDI ARABIA
WATER/OIL SEPARATOR (WOSEP)
(A85-D-0001A, A85-D-0001B)

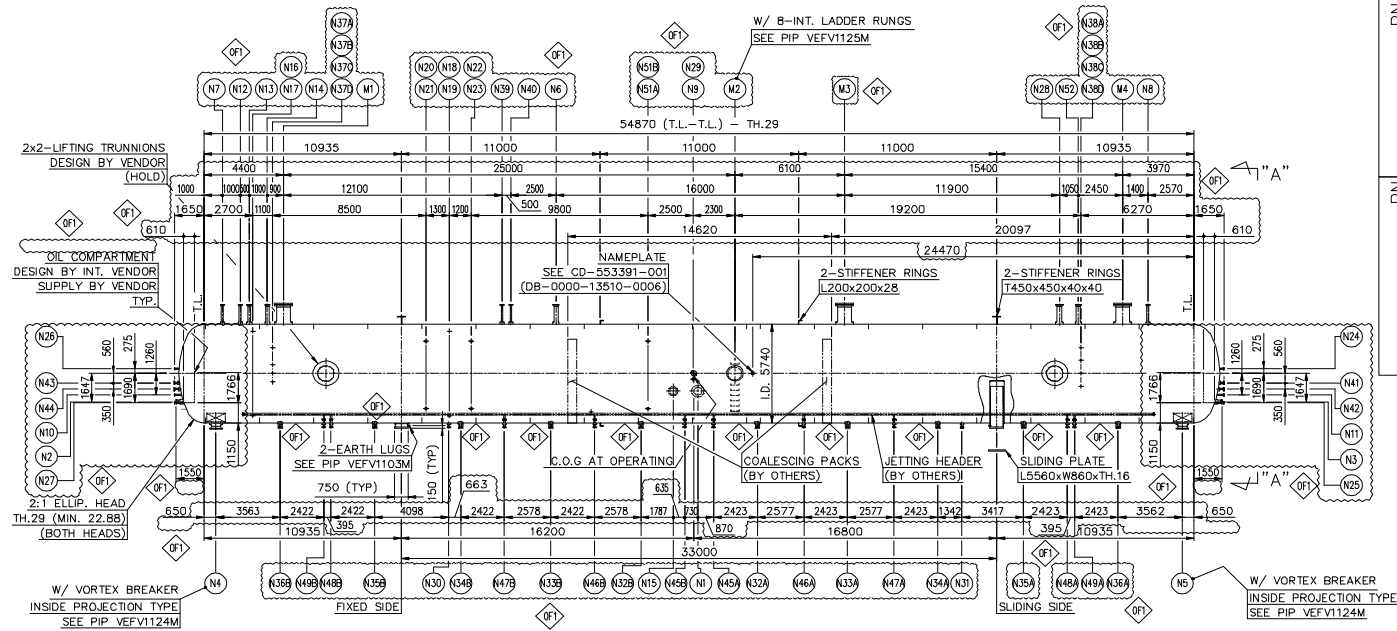




ELEVATION

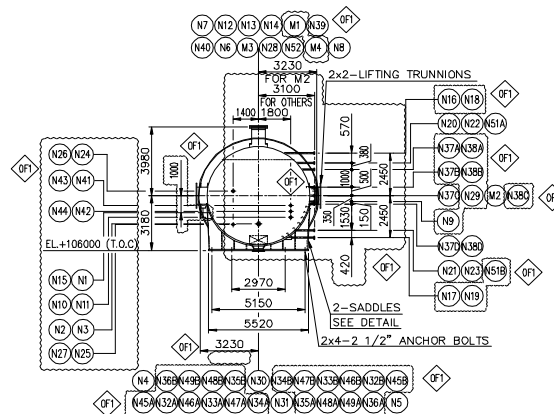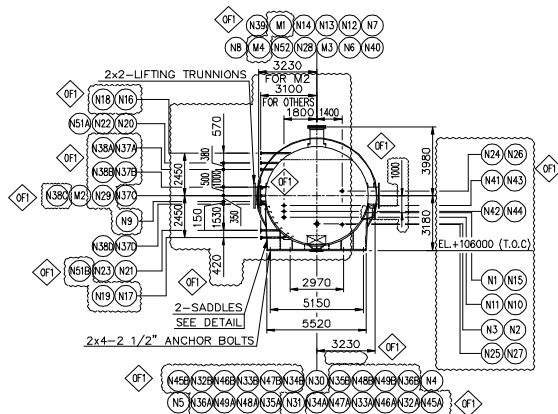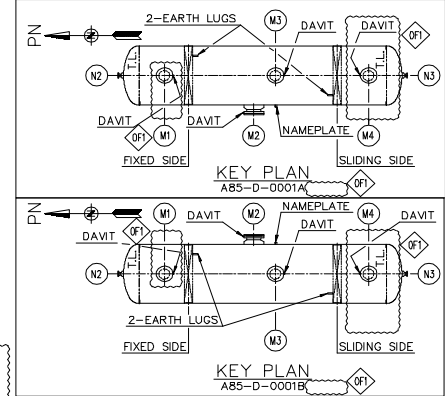


SHEAR FORCE AT BASE (OPERATING CONDITION)	
WIND (LONGITUDINAL)	35
WIND (TRANSVERSE)	420

REQUISITION NO:		R-2151-301	
VENDOR:		MARITIME INDUSTRIAL SERVICES ARABIA CO. LTD.	
REVISION VALIDATION			
THIS REVISION NO. OF1 IS COVERED, FOR ALL APPROVAL AND CERTIFICATION REQUIREMENTS, PER SAEP-334, UNDER DRAWING COMPLETION CERTIFICATION NO:			
DESIGN CERTIFICATION (DESIGN AGENCY)		REVIEW FOR KEY DRAWINGS ☒ REQUIRED (SAUDI ARAMCO)	
ENGG./DATE	CERTIFIED BY/DATE	CONST.AGENCY/DATE	OPERATION/DATE
S. SASAKI/ 14-Aug-23	K. OGAWA/ 14-Aug-23		
REV. NO.	DATE	ORIGINATOR	REVISION DESCRIPTION
00A	09/09/2022	S.S	ISSUED FOR REVIEW
00	07/03/2023	S.S	ISSUED FOR CONSTRUCTION
0F1	14/08/2023	S.S	ISSUED FOR CONSTRUCTION
JOB ORDER/EWO NO.		THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNTIL CERTIFIED AND DATED	
10-08643-0005			
SAUDI ARABIAN OIL COMPANY			
MECHANICAL DATA SHEET FOR WATER/OIL SEPARATOR (WOSEP) (A85-D-0001A, A85-D-0001B)		DRAWING TYPE: DAT	
ZULUF ONSHORE OIL FACILITIES			
ZAFANIYA		SAUDI ARABIA	
PLANT NO	INDEX	DRAWING NUMBER	SHT. NO. REV. NO.
A85	D	CD-553440-001	3 of 5 OF1






**WATER/OIL SEPARATOR (WOSEP)
(A85-D-0001A, A85-D-0001B)
GENERAL ARRANGEMENT DRAWING**

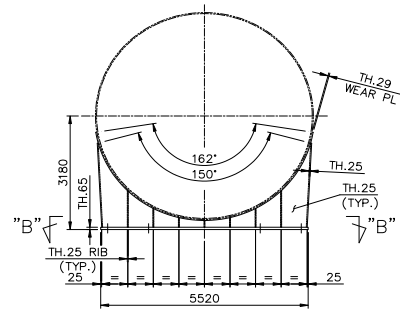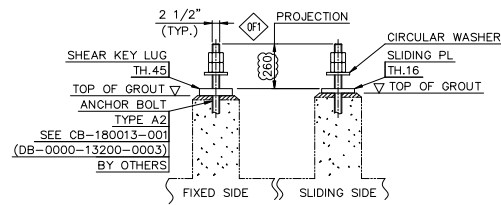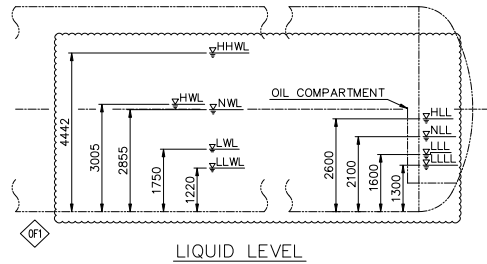

TYP. DETAIL OF INTERNAL
NOZZLE PROJECTION
(BOLT/NUT/GASKET: BY INTERNAL VENDOR)



SLOT HOLE DETAIL

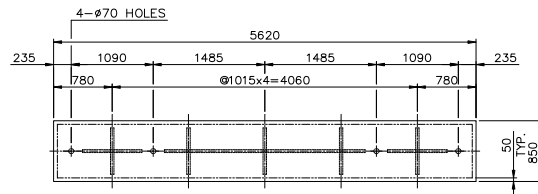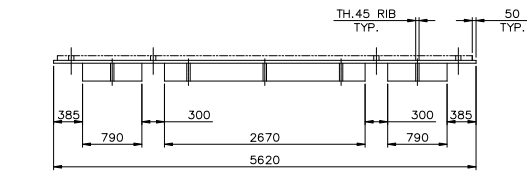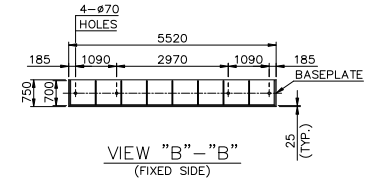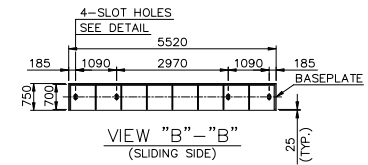

REQUISITION NO: R-2151-301		VENDOR: MARITIME INDUSTRIAL SERVICES ARABIA CO. LTD.		
REVISION VALIDATION				
THIS REVISION NO. 0F1 IS COVERED, FOR ALL APPROVAL AND CERTIFICATION REQUIREMENTS, PER SAEP-334, UNDER DRAWING COMPLETION CERTIFICATION NO:				
DESIGN CERTIFICATION (DESIGN AGENCY)		REVIEW FOR KEY DRAWINGS		OTHER
		☒ REQUIRED (SAUDI ARAMCO)		
ENGG./DATE	CERTIFIED BY/DATE	CONST.AGENCY/DATE	OPERATION/DATE	BY/DATE
S. SASAKI/ 14-Aug-23	K. OGAWA/ 14-Aug-23			
REV. NO.	DATE	ORIGINATOR	REVISION DESCRIPTION	
00A	09/09/2022	S.S	ISSUED FOR REVIEW	
00	07/03/2023	S.S	ISSUED FOR CONSTRUCTION	
0F1	14/08/2023	S.S	ISSUED FOR CONSTRUCTION	
JOB ORDER/EWO NO.		THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNTIL CERTIFIED AND DATED		
10-08643-0005				
SAUDI ARABIAN OIL COMPANY				
MECHANICAL DATA SHEET FOR		DRAWING TYPE:		DAT
WATER/OIL SEPARATOR (WOSEP) (A85-D-0001A, A85-D-0001B)				
ZULUF ONSHORE OIL FACILITIES		SAUDI ARABIA		
ZAFANIYA				
PLANT NO	INDEX	DRAWING NUMBER	SHT. NO.	REV. NO.
A85	D	CD-553440-001	4 of 5	0F1
WATER/OIL SEPARATOR (WOSEP) (A85-D-0001A, A85-D-0001B) GENERAL ARRANGEMENT DRAWING				

NOTES :

- 1 The vendor is responsible for the equipment design and fabrication.
Weights and thickness indicated are preliminary and shall be verified by vendor.
- 2 Deleted.
- 3 Spiral wound gasket shall have 316 SS winding, graphite filler with 316 SS inner ring and CS outer ring.
- 4 Deleted.
- 5 Vendor shall design and fabricate the vessel and lifting attachments for an impact factor of 2.0 minimum considering the erection weight.
- 6 All removable internals shall be designed and fabricated to pass through manway.
- 7 Deleted.
- 8 All blind nozzles and manways shall be complete with gasket, bolts and nuts.
- 9 External painting and internal coating shall be as per SAES-H-001, SAES-H-101V, SS-0000-13A00-0001 and SS-0000-13A00-0003.
- | Parts | External Painting | Internal Coating |
|----------------------------|-------------------|---|
| Vessel | APCS-2C | APCS-2E (All wetted CS internal surfaces) |
| Support | APCS-1D | - |
| Support under fireproofing | - | - |
- Vendor is responsible for internal coating application with full time inspection per specification SAES-H-001 and 175-091900 inspection requirements. Surface preparation shall be as recommended per coating system.
All welds shall be ground flush and sharp edges shall be removed and all corners be radiused. Vendor shall confirm suitability of APCS-2E for steam out condition.
- 10 Vendor shall provide internal cathodic protection and CP shall be provided as per SAES-X-500 and AA-036388 / 89.
All metallic parts/devices installed inside the vessel whose material different from the vessel material shall be isolated from the body of the vessel.
A way of measuring electrical resistance with a megger tester has to be provided between the body of the vessel and each such internal part/device.
- 11 Nozzle size and quantity of anode monitoring to be confirmed by vendor.
- 12 Deleted.
- 13 Deleted.
- 14 Deleted.
- 15 All dimensions are in millimeters (mm), unless otherwise indicated.
- 16 Nozzle and manway bolt holes shall straddle vessel centerlines unless otherwise indicated.
- 17 Deleted.
- 18 Deleted.
- 19 Deleted.
- 20 Equipment should be considered in wet sour service region 2 and shall comply with
NACE MR0175/ISO15156 with HIC requirements and NACE SP0472 (including internal and external attachment clips).
- 21 Deleted.
- 22 Deleted.
- 23 Deleted.
- 24 Vessel is also subject to steam-out condition and shall be designed for an external pressure of 15 psi @ 200°F and 7.5 psi @ 300°F.
- 25 Deleted.
- 26 Deleted.
- 27 All internals shall be trial fitted inside the vessel at vendor shop under the supervision of internals manufacturer on a full-time basis during fabrication. Necessary isolation between dissimilar materials (such as carbon steel and stainless steel) shall be maintained which shall be tested using megger testing.
- 28 Deleted.
- 29 Deleted.

APPLICABLE SPECIFICATIONS AND STANDARDS

Following specifications, standards and drawings are shall be considered as minimum, but not limited to:

Project Specifications:

PE-300003	Specification for Pressure Vessels
CE-557203-001	Supplementary Specification for Safety Identification and Safety Colors
(SS-0000-13A00-0002)	

Saudi Aramco Materials System Specifications

02-SAMSS-011	Forged Steel and Alloy Flanges
01-SAMSS-016	Qualification of Plates for Pressured Equipment and Storage Tanks for Resistance to Hydrogen-induced Cracking
17-SAMSS-006	Galvanic Anodes for Cathodic Protection
17-SAMSS-008	Junction Boxes for Cathodic Protection
32-SAMSS-004	Manufacture of Pressure Vessels

Saudi_Aramco_Engineering_Standards

SAES-A-112	Meteorological and Seismic Design Data
SAES-A-202	Saudi Aramco Engineering Drawing Preparation
SAES-A-206	Positive Material Identification
SAES-H-001	Coating Selection and Application Requirements for Industrial Plants and Equipment
SAES-H-101V	Approved Saudi Aramco Data Sheets – Paints and Coatings
SAES-J-100	Process Measurement
SAES-M-001	Structural Design Criteria for Non-Building Structures
SAES-N-001	Basic Criteria, Industrial Insulation
SAES-W-010	Welding Requirements for Pressure Vessels
SAES-X-500	Cathodic Protection of Vessel and Tank internals

Standard_Drawings

CD-553389-001	Standard Drawing for Pipe Support Lug
(DB-0000-13410-0004)	
CD-553391-001	Standard Drawing for Nameplate for Pressure Vessel
(DB-0000-13510-0006)	
CB-180013-001	Foundation Plan/ Layout/ Sect/ Det PJ Standard Anchor Bolt
(DB-0000-13200-0003)	
VEFV1100M	Vessel/ S&T Heat Exchanger Standard Details (Metric Units)

REQUISITION NO:	R-2151-301
VENDOR:	MARITIME INDUSTRIAL SERVICES ARABIA CO. LTD.

REVISION VALIDATION

THIS REVISION NO OF1 IS COVERED, FOR ALL APPROVAL AND CERTIFICATION REQUIREMENTS, PER SAEP-334, UNDER DRAWING COMPLETION CERTIFICATION NO:

DESIGN CERTIFICATION (DESIGN AGENCY)		REVIEW FOR KEY DRAWINGS ☒ REQUIRED (SAUDI ARAMCO)		OTHER
ENGG./DATE	CERTIFIED BY/DATE	CONST.AGENCY/DATE	OPERATION/DATE	BY/DATE
S. SASAKI/ 14-Aug-23	K. OGAWA/ 14-Aug-23			
REV.NO.	DATE	ORIGINATOR	REVISION DESCRIPTION	
00A	09/09/2022	S.S	ISSUED FOR REVIEW	
00	07/03/2023	S.S	ISSUED FOR CONSTRUCTION	
0F1	14/08/2023	S.S	ISSUED FOR CONSTRUCTION	
JOB ORDER/EWO NO.		THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNTIL CERTIFIED AND DATED		
10-08643-0005				

SAUDI ARABIAN OIL COMPANY

MECHANICAL DATA SHEET FOR		DRAWING TYPE:	DAT
WATER/OIL SEPARATOR (WOSEP) (A85-D-0001A, A85-D-0001B)			
ZULUF ONSHORE OIL FACILITIES			
SAUDI ARABIA			
PLANT NO	INDEX	DRAWING NUMBER	REV. NO.
A85	D	CD-553440-001	5 of 5

WATER/OIL SEPARATOR (WOSEP)
(A85-D-0001A, A85-D-0001B)
GENERAL NOTES