


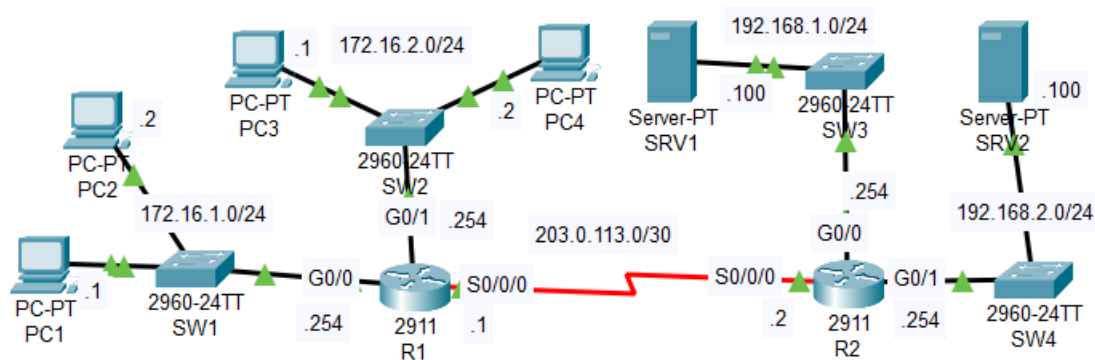

Topology

1. Configure extended ACLs to fulfill the following network policies:

- Hosts in 172.16.2.0/24 can't communicate with PC1.
- Hosts in 172.16.1.0/24 can't access the DNS service on SRV1.
- Hosts in 172.16.2.0/24 can't access the HTTP or HTTPS services on SRV2.

```
R1>en
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip access-list extended 100
R1(config-ext-nacl)#deny udp 172.16.1.0 0.0.0.255 host 192.168.1.100 eq 53
R1(config-ext-nacl)#deny tcp 172.16.1.0 0.0.0.255 host 192.168.1.100 eq 53
R1(config-ext-nacl)#permit ip any any
R1(config-ext-nacl)#int g0/0
R1(config-if)#ip access-group 100 in
R1(config-if)#ip access-list extended 101
R1(config-ext-nacl)#deny ip 172.16.2.0 0.0.0.255 host 172.16.1.1
R1(config-ext-nacl)#deny tcp 172.16.2.0 0.0.0.255 host 192.168.2.100 eq 80
R1(config-ext-nacl)#deny tcp 172.16.2.0 0.0.0.255 host 192.168.2.100 eq 443
R1(config-ext-nacl)#permit ip any any
R1(config-ext-nacl)#int g0/1
R1(config-if)#ip access-group 101 in
```