National *Semiconductor*

June 1989

54174/DM54174/DM74174, 54175/DM54175/DM74175 Hex/Quad D Flip-Flops with Clear
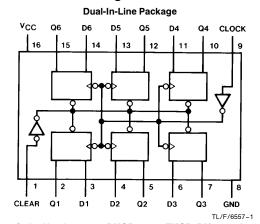
General Description

These positive-edge triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. All have a direct clear input, and the quad (175) version features complementary outputs from each flip-flop.

Information at the D inputs meeting the setup and hold time requirements is transferred to the Q outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock input is at either the high or low level, the D input signal has no effect at the output.
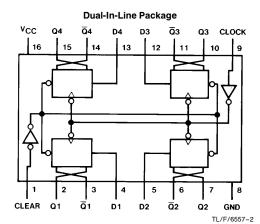
Features

■ 174 contains six flip-flops with single-rail outputs
■ 175 contains four flip-flops with double-rail outputs
■ Buffered clock and direct clear inputs
■ Individual data input to each flip-flop
■ Applications include:
   Buffer/storage registers
   Shift registers
   Pattern generators
■ Typical clock frequency 40 MHz
■ Typical power dissipation per flip-flop 38 mW
■ Alternate Military/Aerospace device (54174, 54175) is available. Contact a National Semiconductor Sales Office/Distributor for specifications.

Connection Diagrams

Dual-In-Line Package

TL/F/6557–1

Order Number 54174DMQB, 54174FMQB, DM54174J, DM54174W or DM74174N
See NS Package Number J16A, N16E or W16A

Dual-In-Line Package

TL/F/6557–2

Order Number 54175DMQB, 54175FMQB, DM54175J, DM54175W or DM74175N
See NS Package Number J16A, N16E or W16A

Function Table (Each Flip-Flop)

Inputs			Outputs	
Clear	Clock	D	Q	$\overline{Q}$†
L	X	X	L	H
H	↑	H	H	L
H	↑	L	L	H
H	L	X	Q_0	$\overline{Q_0}$

H = High Level (steady state)
L = Low Level (steady state)
X = Don't Care
↑ = Transition from low to high level
Q_0 = The level of Q before the indicated steady-state input conditions were established.
† = 175 only

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	5.5V
Operating Free Air Temperature Range	
DM54 and 54	$-55°C$ to $+125°C$
DM74	$0°C$ to $+70°C$
Storage Temperature Range	$-65°C$ to $+150°C$

Note: *The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.*

Recommended Operating Conditions

Symbol	Parameter		DM54174			DM74174			Units
			Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High Level Input Voltage		2			2			V
V_{IL}	Low Level Input Voltage				0.8			0.8	V
I_{OH}	High Level Output Current				-0.8			-0.8	mA
I_{OL}	Low Level Output Current				16			16	mA
f_{CLK}	Clock Frequency (Note 4)		0		30	0		30	MHz
t_W	Pulse Width (Note 4)	Clock Low	25			25			ns
		Clock High	10			10			
		Clear	20			20			
t_{SU}	Data Setup Time (Note 4)		20			20			ns
t_H	Data Hold Time (Note 4)		0			0			ns
t_{REL}	Clear Release Time (Note 4)		30			30			ns
T_A	Free Air Operating Temperature		-55		125	0		70	°C

'174 Electrical Characteristics
over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	V_{CC} = Min, I_I = -12 mA				-1.5	V
V_{OH}	High Level Output Voltage	V_{CC} = Min, I_{OH} = Max V_{IL} = Max, V_{IH} = Min		2.4			V
V_{OL}	Low Level Output Voltage	V_{CC} = Min, I_{OL} = Max V_{IH} = Min, V_{IL} = Max				0.4	V
I_I	Input Current @ Max Input Voltage	V_{CC} = Max, V_I = 5.5V				1	mA
I_{IH}	High Level Input Current	V_{CC} = Max, V_I = 2.4V				40	μA
I_{IL}	Low Level Input Current	V_{CC} = Max, V_I = 0.4V				-1.6	mA
I_{OS}	Short Circuit Output Current	V_{CC} = Max (Note 2)	DM54	-20		-57	mA
			DM74	-18		-57	
I_{CC}	Supply Current	V_{CC} = Max (Note 3)			45	65	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time.

Note 3: With all outputs open and all DATA and CLEAR inputs at 4.5V, I_{CC} is measured after a momentary ground, then 4.5V applied to the CLOCK input.

Note 4: T_A = 25°C and V_{CC} = 5V.

'174 Switching Characteristics

at V_{CC} = 5V and T_A = 25°C (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	R_L = 400Ω, C_L = 15 pF		Units
			Min	Max	
f_{MAX}	Maximum Clock Frequency		30		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output	Clock to Any Q		25	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clock to Any Q		25	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clear to Any Q		40	ns

Recommended Operating Conditions

Symbol	Parameter		DM54175			DM74175			Units
			Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High Level Input Voltage		2			2			V
V_{IL}	Low Level Input Voltage				0.8			0.8	V
I_{OH}	High Level Output Current				−0.8			−0.8	mA
I_{OL}	Low Level Output Current				16			16	mA
f_{CLK}	Clock Frequency (Note 1)		0		30	0		30	MHz
t_W	Pulse Width (Note 1)	Clock Low	25			25			ns
		Clock High	10			10			
		Clear	20			20			
t_{SU}	Data Setup Time (Note 1)		20			20			ns
t_H	Data Hold Time (Note 1)		0			0			ns
t_{REL}	Clear Release Time (Note 1)		30			30			ns
T_A	Free Air Operating Temperature		−55		125	0		70	°C

Note 1: T_A = 25°C and V_{CC} = 5V.

'175 Electrical Characteristics
over recommended operating free air temperature range (unless otherwise noted)

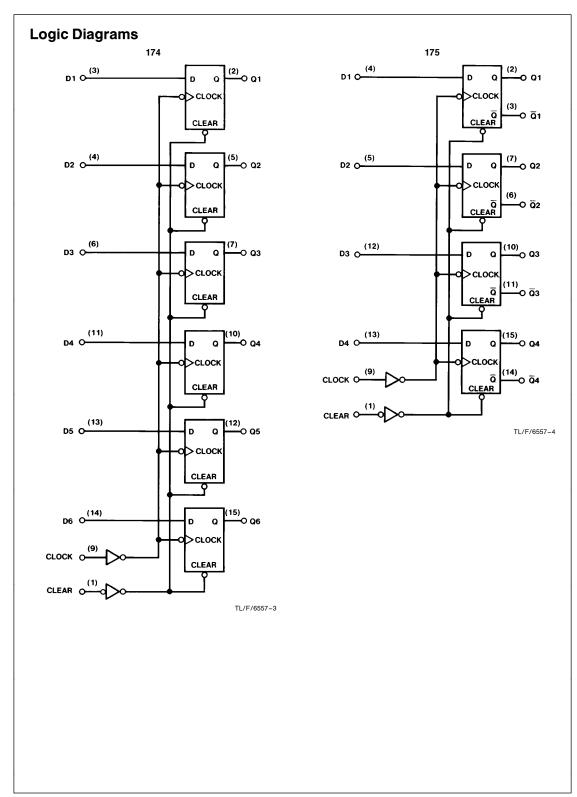| Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	V_{CC} = Min, I_I = -12 mA				-1.5	V
V_{OH}	High Level Output Voltage	V_{CC} = Min, I_{OH} = Max V_{IL} = Max, V_{IH} = Min		2.4			V
V_{OL}	Low Level Output Voltage	V_{CC} = Min, I_{OL} = Max V_{IH} = Min, V_{IL} = Max				0.4	V
I_I	Input Current @ Max Input Voltage	V_{CC} = Max, V_I = 5.5V				1	mA
I_{IH}	High Level Input Current	V_{CC} = Max, V_I = 2.4V				40	μA
I_{IL}	Low Level Input Current	V_{CC} = Max, V_I = 0.4V				-1.6	mA
I_{OS}	Short Circuit Output Current	V_{CC} = Max (Note 2)	DM54	-20		-57	mA
			DM74	-18		-57	
I_{CC}	Supply Current	V_{CC} = Max (Note 3)			30	45	mA

'175 Switching Characteristics
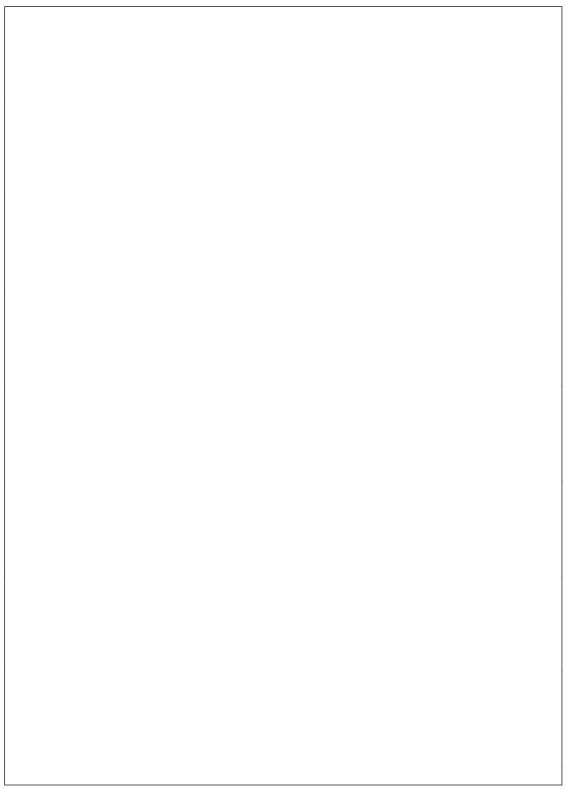at V_{CC} = 5V and T_A = 25°C (See Section 1 for Test Waveforms and Output Load)

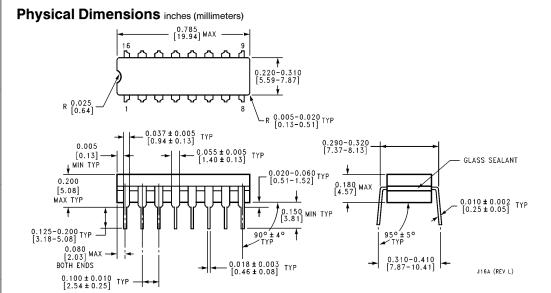| Symbol	Parameter	From (Input) To (Output)	R_L = 400Ω, C_L = 15 pF		Units
			Min	Max	
f_{MAX}	Maximum Clock Frequency		30		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output	Clock to Any Q or $\overline{Q}$		25	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clock to Any Q or $\overline{Q}$		25	ns
t_{PLH}	Propagation Delay Time Low to High Level Output	Clear to Any $\overline{Q}$		25	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Clear to Any Q		40	ns

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

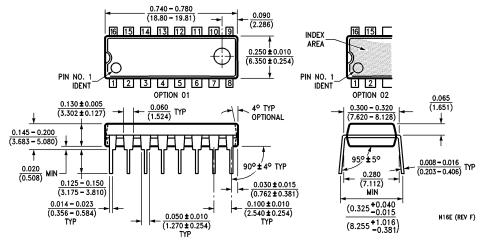**Note 2:** Not more than one output should be shorted at a time.

Note 3: With all outputs open and 4.5V applied to all DATA and CLEAR inputs, I_{CC} is measured after a momentary ground then 4.5V applied to the CLOCK.
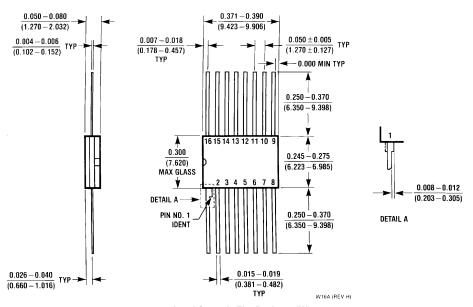
Logic Diagrams

174

D1 O— (3) ——— D   Q (2) —O Q1
CLOCK
CLEAR

D2 O— (4) ——— D   Q (5) —O Q2
CLOCK
CLEAR

D3 O— (6) ——— D   Q (7) —O Q3
CLOCK
CLEAR

D4 O— (11) ——— D   Q (10) —O Q4
CLOCK
CLEAR

D5 O— (13) ——— D   Q (12) —O Q5
CLOCK
CLEAR

D6 O— (14) ——— D   Q (15) —O Q6
CLOCK
CLEAR

CLOCK O— (9)
CLEAR O— (1)

TL/F/6557–3

175

D1 O— (4) ——— D   Q (2) —O Q1
CLOCK
$\overline{Q}$ (3) —O $\overline{Q1}$
CLEAR

D2 O— (5) ——— D   Q (7) —O Q2
CLOCK
$\overline{Q}$ (6) —O $\overline{Q2}$
CLEAR

D3 O— (12) ——— D   Q (10) —O Q3
CLOCK
$\overline{Q}$ (11) —O $\overline{Q3}$
CLEAR

D4 O— (13) ——— D   Q (15) —O Q4
CLOCK
$\overline{Q}$ (14) —O $\overline{Q4}$
CLEAR

CLOCK O— (9)
CLEAR O— (1)

TL/F/6557–4

Physical Dimensions inches (millimeters)

0.785
[19.94] MAX

16   9

0.220-0.310
[5.59-7.87]

R 0.025
[0.64]

1   8

R 0.005-0.020
[0.13-0.51] TYP

0.037 ± 0.005
[0.94 ± 0.13] TYP

0.005
[0.13]
MIN TYP

0.055 ± 0.005
[1.40 ± 0.13] TYP

0.290-0.320
[7.37-8.13]

GLASS SEALANT

0.200
[5.08]
MAX TYP

0.020-0.060
[0.51-1.52] TYP

0.180 MAX
[4.57]

0.010 ± 0.002
[0.25 ± 0.05] TYP

0.150
[3.81] MIN TYP

0.125-0.200 TYP
[3.18-5.08]

90° ± 4°
TYP

95° ± 5°
TYP

0.080 MAX
[2.03]
BOTH ENDS

0.018 ± 0.003
[0.46 ± 0.08] TYP

0.310-0.410
[7.87-10.41]

J16A (REV L)

0.100 ± 0.010
[2.54 ± 0.25] TYP

16-Lead Ceramic Dual-In-Line Package (J)
Order Number 54174DMQB, 54175DMQB, DM54174J or DM54175J
NS Package Number J16A

0.740 – 0.780
(18.80 – 19.81)

0.090
(2.286)

16 15 14 13 12 11 10 9

INDEX
AREA

16 15

0.250 ± 0.010
(6.350 ± 0.254)

PIN NO. 1
IDENT

1 2 3 4 5 6 7 8

OPTION 01

PIN NO. 1
IDENT

1 2

OPTION 02

0.130 ± 0.005
(3.302 ± 0.127)

0.060
(1.524) TYP

4° TYP
OPTIONAL

0.065
(1.651)

0.300 – 0.320
(7.620 – 8.128)

0.145 – 0.200
(3.683 – 5.080)

95° ± 5°

0.008 – 0.016
(0.203 – 0.406) TYP

0.020
(0.508) MIN

90° ± 4° TYP

0.280
(7.112)
MIN

0.125 – 0.150
(3.175 – 3.810)

0.030 ± 0.015
(0.762 ± 0.381)

0.014 – 0.023
(0.356 – 0.584)
TYP

0.100 ± 0.010
(2.540 ± 0.254)
TYP

(0.325 +0.040
-0.015)

0.050 ± 0.010
(1.270 ± 0.254)
TYP

(8.255 +1.016
-0.381)

N16E (REV F)

16-Lead Molded Dual-In-Line Package (N)
Order Number DM74174N or DM74175N
NS Package Number N16E

Physical Dimensions inches (millimeters) (Continued)

$\frac{0.050-0.080}{(1.270-2.032)}$

$\frac{0.004-0.006}{(0.102-0.152)}$ TYP

$\frac{0.371-0.390}{(9.423-9.906)}$

$\frac{0.007-0.018}{(0.178-0.457)}$ TYP

$\frac{0.050\pm0.005}{(1.270\pm0.127)}$ TYP

0.000 MIN TYP

$\frac{0.250-0.370}{(6.350-9.398)}$

$\frac{0.300}{(7.620)}$ MAX GLASS

16 15 14 13 12 11 10 9

$\frac{0.245-0.275}{(6.223-6.985)}$

1 2 3 4 5 6 7 8

DETAIL A

PIN NO. 1 IDENT

$\frac{0.250-0.370}{(6.350-9.398)}$

1

$\frac{0.008-0.012}{(0.203-0.305)}$

DETAIL A

$\frac{0.026-0.040}{(0.660-1.016)}$ TYP

$\frac{0.015-0.019}{(0.381-0.482)}$ TYP

W16A (REV H)

16-Lead Ceramic Flat Package (W)
Order Number 54174FMQB, 54175FMQB, DM54174W or DM54175W
NS Package Number W16A

National Semiconductor was acquired by Texas Instruments.

This file is the datasheet for the following electronic components:

DM54174W - http://www.ti.com/product/dm54174w?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM54175W - http://www.ti.com/product/dm54175w?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM54175J - http://www.ti.com/product/dm54175j?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74174N - http://www.ti.com/product/dm74174n?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM54174J - http://www.ti.com/product/dm54174j?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54174DMQB - http://www.ti.com/product/54174dmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54175FMQB - http://www.ti.com/product/54175fmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54175DMQB - http://www.ti.com/product/54175dmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54174FMQB - http://www.ti.com/product/54174fmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74175N - http://www.ti.com/product/dm74175n?HQS=TI-null-null-dscatalog-df-pf-null-wwe