with toothed belt drive and roller guide (ZRS) or rail guide (ZSS)

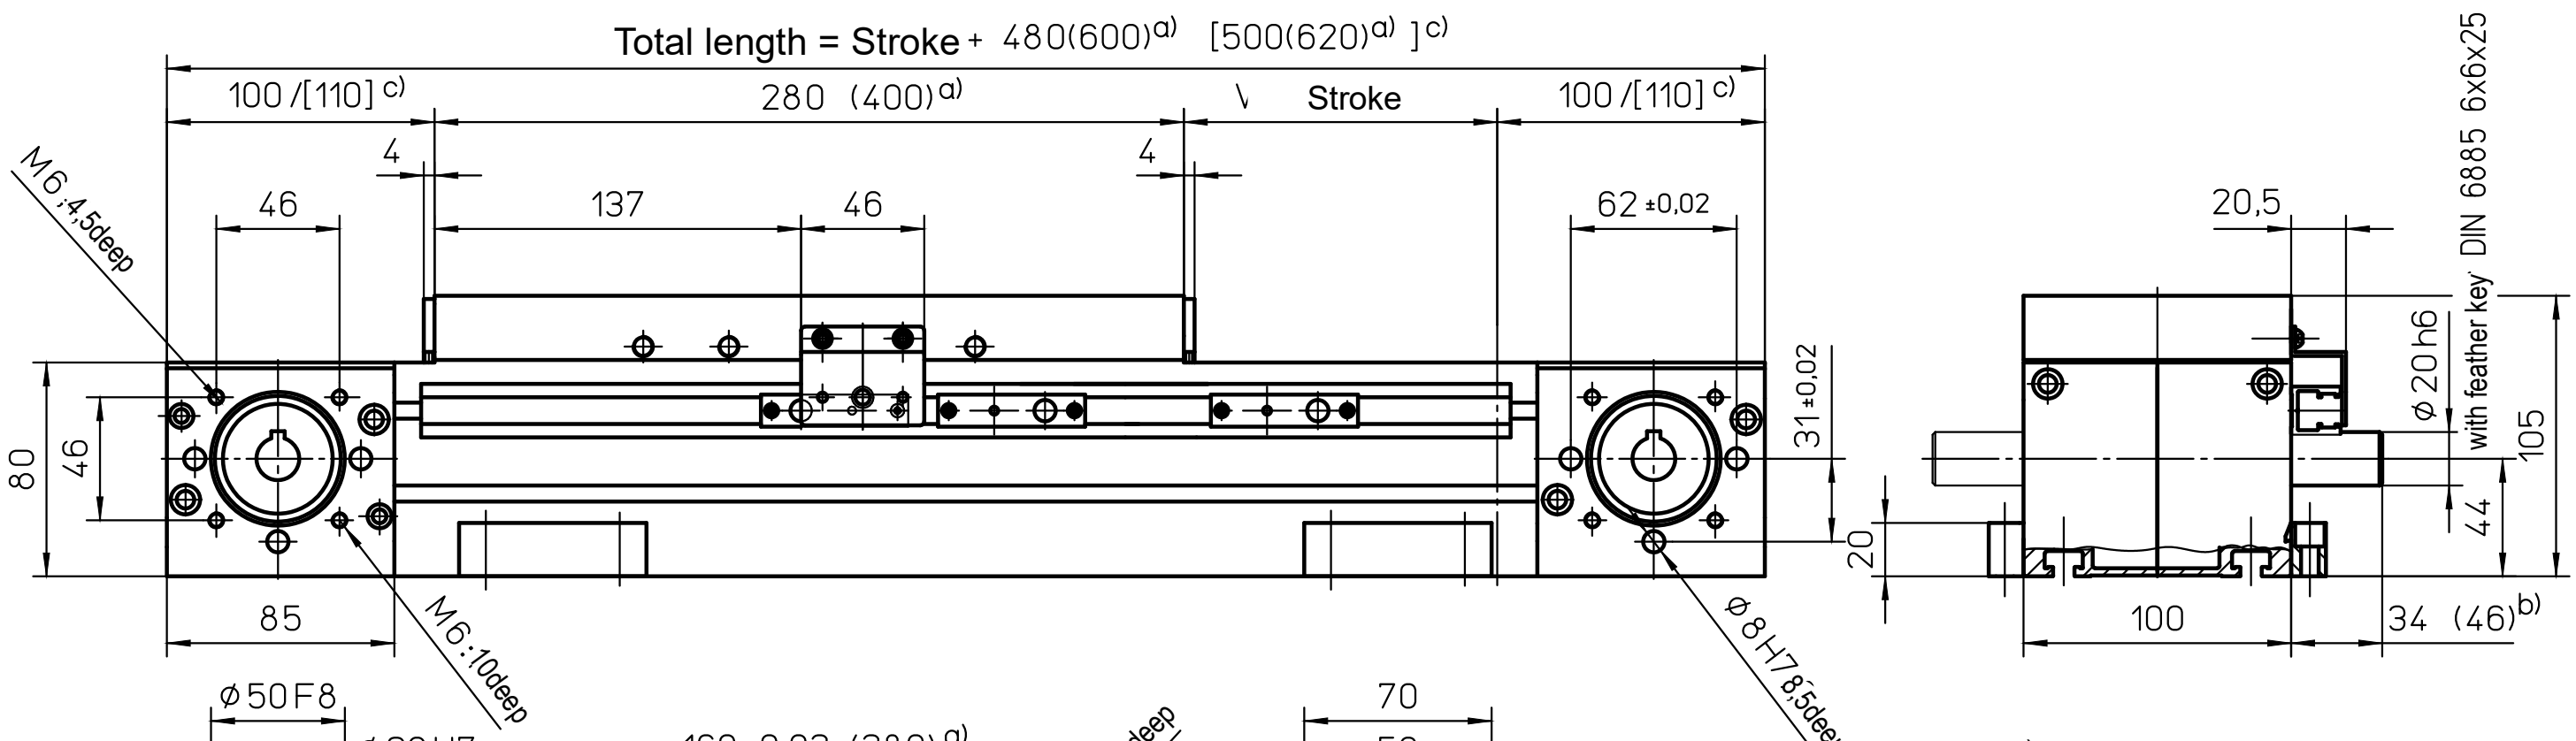

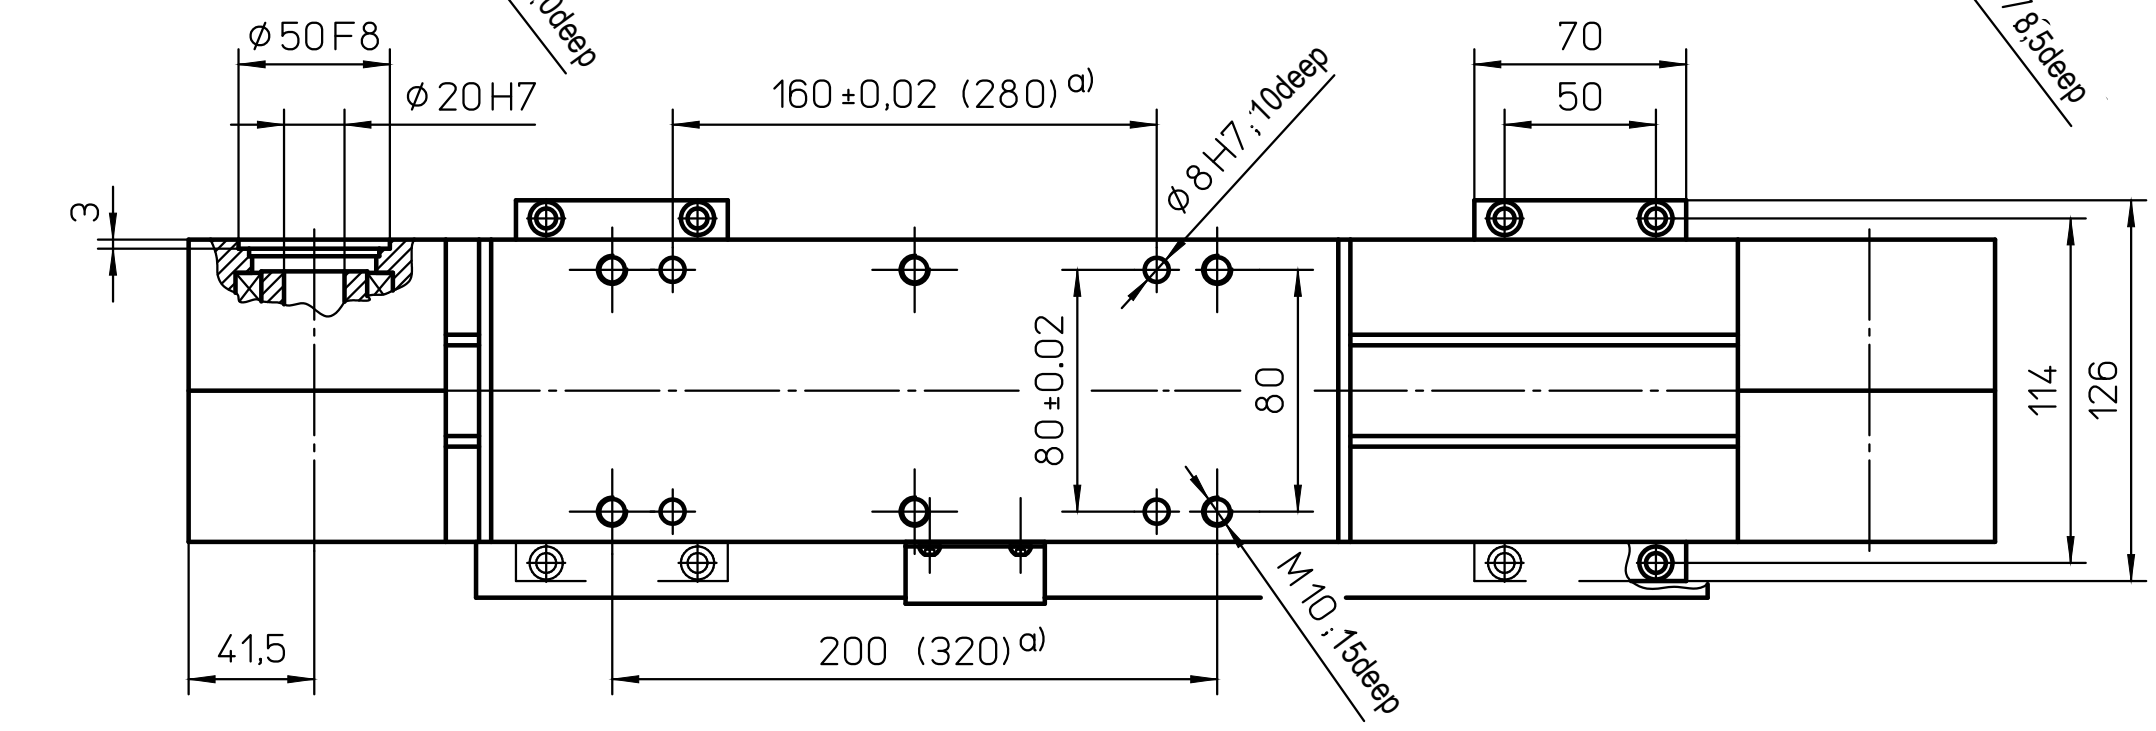

a) Data in brackets refer to long carriage

b) Data in brackets refer to version GX

c) Data in square brackets refer to version with cover band

Mounting elements see page B50

Weights	ZRS	ZSS
Basic length without stroke:	9.50 kg	9.10 kg
100 mm stroke:	1.10 kg	1.45 kg
Entire carriage 280 mm:	4.10 kg	3.80 kg
Entire carriage 400 mm:	5.85 kg	5.43 kg

Max. total length: 7900 mm
(longer on request)

Technical Data	ZRS	ZSS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	40 m/s²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	2.50 Nm	
Moment of inertia:	$1.30 \cdot 10^{-2}$ kgm²	$1.26 \cdot 10^{-2}$ kgm²
Drive element:	Toothed belt **40 AT10**	
Stroke per revolution:	200 mm	

Forces and moments

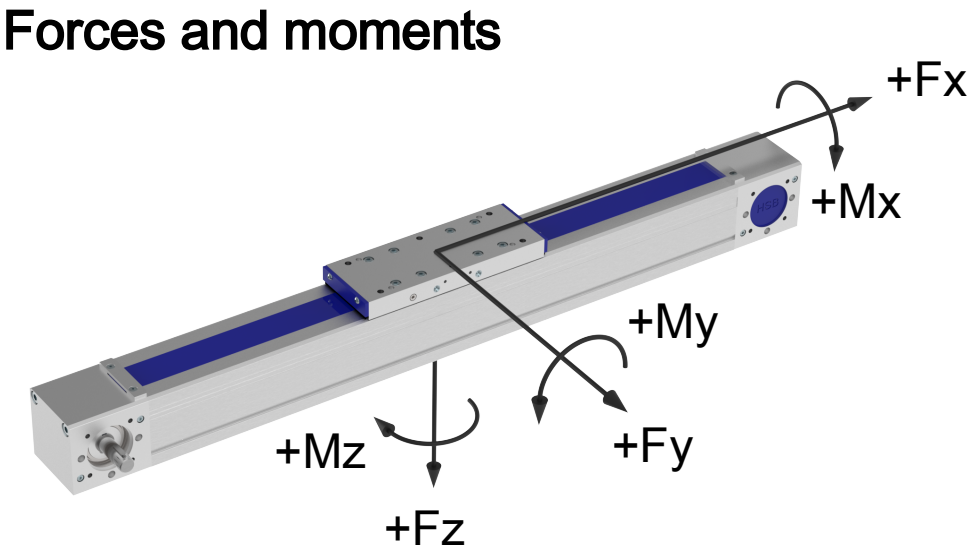

	ZRS	ZSS
Forces	Dynamic [N]	
F_x d)	2800	
F_Y	1000	
F_z	2500	3000
$-F_z$	1200	2000
Moments	Dynamic [Nm]	
M_x	200	200
M_Y	250 (350)	300 (420)
M_z	200 (280)	300 (420)

d) Maximum value (see diagram "F_X-v-Diagram")
Data in brackets refer to long carriage plate (400)

F_X - v - Diagram

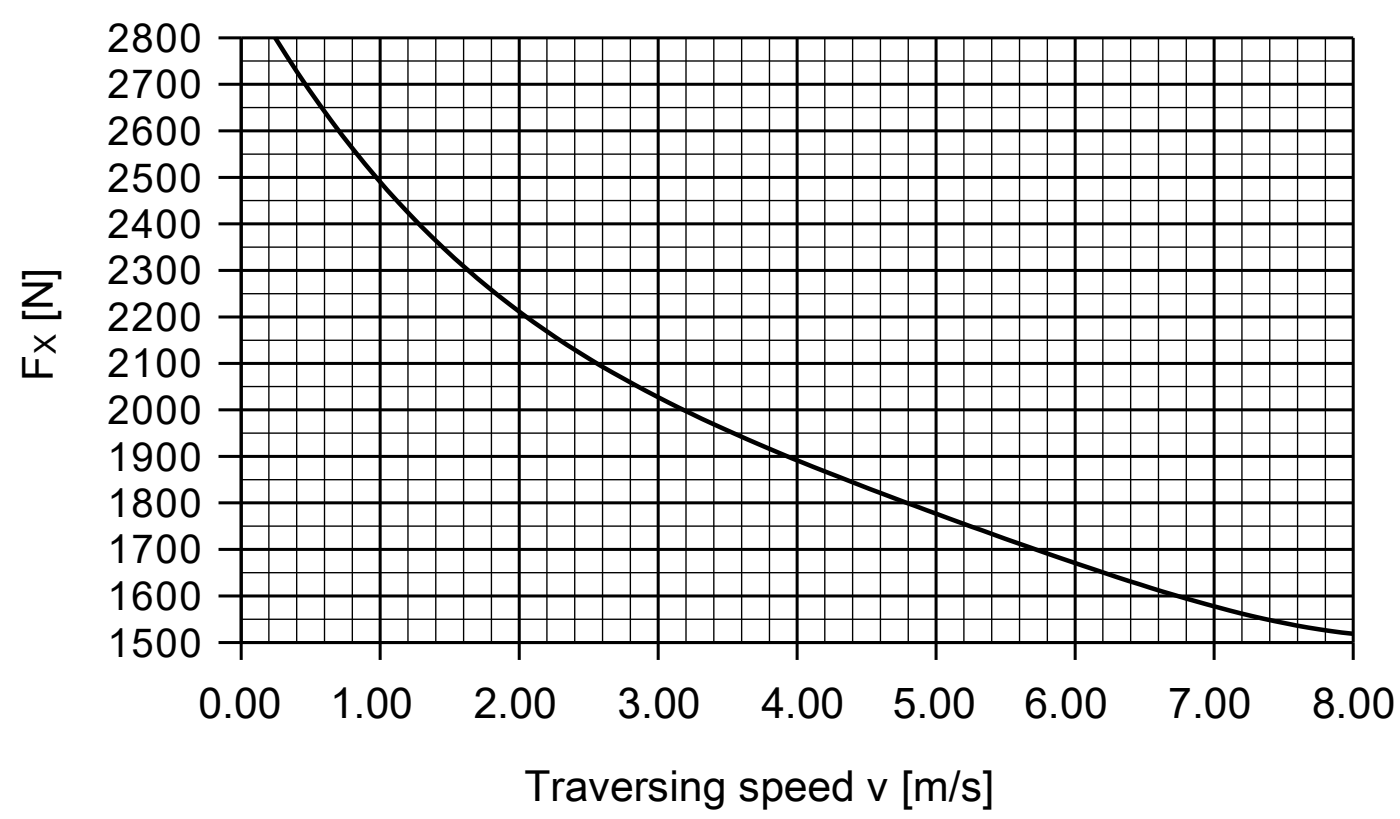

For mechanical linear drives with roller guide,
the static load rating "C_{stat}" (page TL 11) applies for static loads.