

静态路由实验

院系：计算机学院

班级：计科五班

组长：刘森元

| 学号 | 学生 |
|----------|-----|
| 21307289 | 刘森元 |
| 21307355 | 黄梓宏 |
| 21307357 | 刘思昊 |

实验题目

静态路由实验

实验目的

掌握静态路由的配置和使用方法，熟悉交换机端口镜像的方法以及如何用于监视端口

实验内容

1. 阅读教材 P190-192 关于端口镜像的内容
2. 阅读教材 P233 实例 7-1
3. 阅读教材 P29，熟悉 Packet Tracer 使用实例
4. 完成教材 P273 习题 15

实验记录

首先根据实验教程上的拓扑图进行网络配置


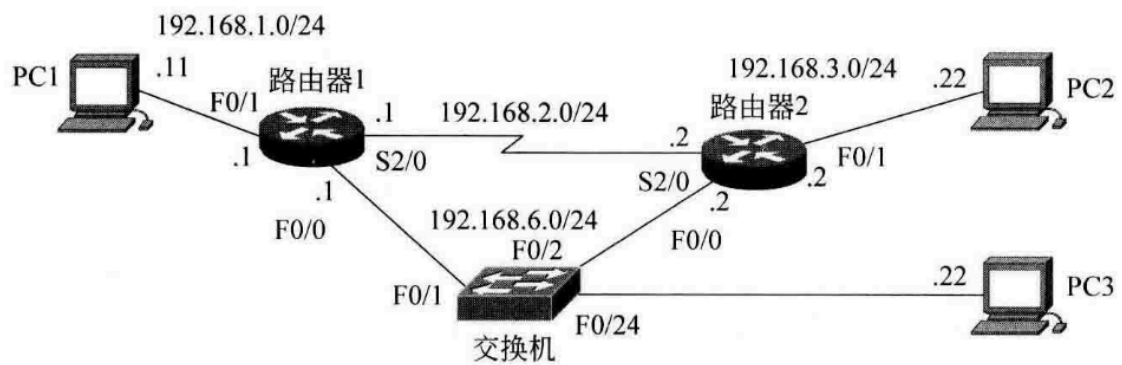


图 7-36 第 15 题拓扑结构

在 Packet Tracer 中有

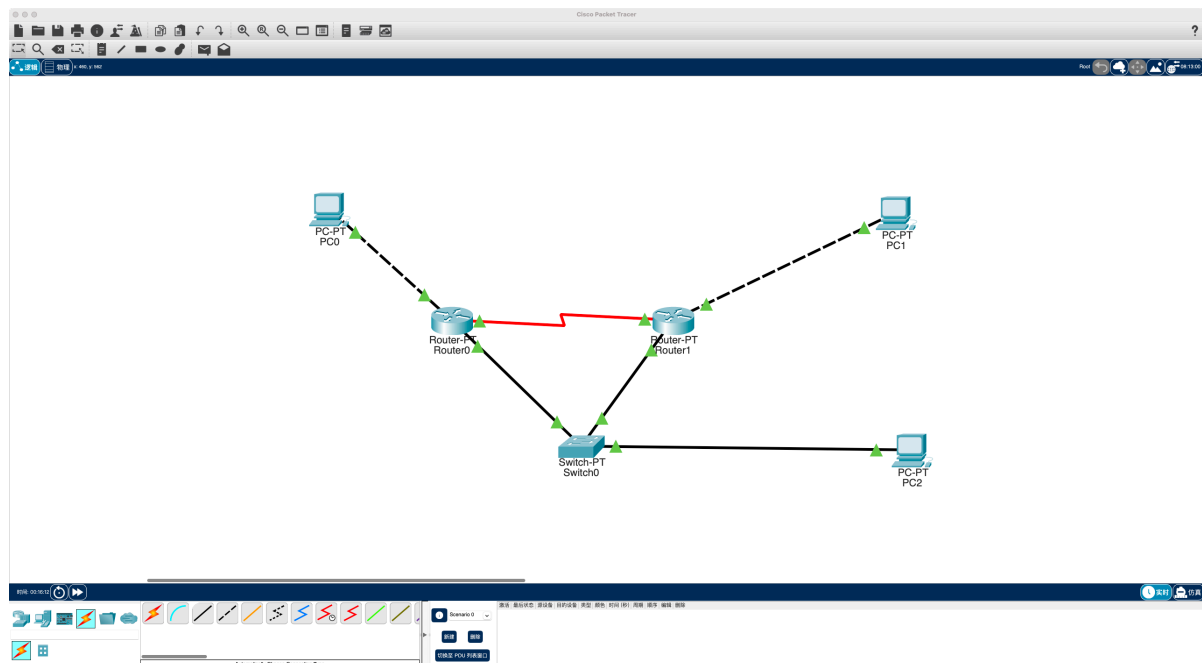

对于各个设备进行 ip 配置，使用如下命令

```
Router> enable 15
Router# config
Router(config)# interface GigabitEthernet [port]
Router(config-if)# ip address [ip] [mask]
```

对于各个设备，可以查看到 ip 配置情况

PC0

```
C:\>ipconfig
```

```
FastEthernet0 Connection:(default port)
```

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::20A:41FF:FE88:7E5D
IPv6 Address.....: ::
IPv4 Address.....: 192.168.1.11
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                        192.168.1.1
```

PC1

```
C:\>ipconfig
```

```
FastEthernet0 Connection:(default port)
```

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::202:17FF:FEEE:CE8C
IPv6 Address.....: ::
IPv4 Address.....: 192.168.3.22
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                        192.168.3.2
```

PC2

```
C:\>ipconfig
```

```
FastEthernet0 Connection:(default port)
```

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::204:9AFF:FE22:6D0D
IPv6 Address.....: ::
IPv4 Address.....: 192.168.6.22
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                        0.0.0.0
```

Router0

```
Router#show ip interface brief
```

| Interface | IP-Address | OK? | Method | Status | Protocol |
|-----------------|-------------|-----|--------|-----------------------|----------|
| FastEthernet0/0 | 192.168.6.1 | YES | manual | up | up |
| FastEthernet1/0 | 192.168.1.1 | YES | manual | up | up |
| Serial2/0 | 192.168.2.1 | YES | manual | up | up |
| Serial3/0 | unassigned | YES | unset | administratively down | down |
| FastEthernet4/0 | unassigned | YES | unset | administratively down | down |
| FastEthernet5/0 | unassigned | YES | unset | administratively down | down |

Router1

```
Router#show ip interface brief
```

| Interface | IP-Address | OK? | Method | Status | Protocol |
|-----------------|-------------|-----|--------|-----------------------|----------|
| FastEthernet0/0 | 192.168.6.2 | YES | manual | up | up |
| FastEthernet1/0 | 192.168.3.2 | YES | manual | up | up |
| Serial2/0 | 192.168.2.2 | YES | manual | up | up |
| Serial3/0 | unassigned | YES | unset | administratively down | down |
| FastEthernet4/0 | unassigned | YES | unset | administratively down | down |
| FastEthernet5/0 | unassigned | YES | unset | administratively down | down |

1) 记录两台路由器的路由表

Router0

```
Router>show ip route
```

Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is not set

```
C    192.168.1.0/24 is directly connected, FastEthernet1/0
C    192.168.2.0/24 is directly connected, Serial2/0
S    192.168.3.0/24 [1/0] via 192.168.6.2
C    192.168.6.0/24 is directly connected, FastEthernet0/0
```

Router1

```
Router>show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

S    192.168.1.0/24 [1/0] via 192.168.6.1
C    192.168.2.0/24 is directly connected, Serial2/0
C    192.168.3.0/24 is directly connected, FastEthernet1/0
C    192.168.6.0/24 is directly connected, FastEthernet0/0
```

2) 用 PC0 ping PC1, 记录交换机的 MAC 地址表

PC0

```
C:\>ping 192.168.3.22

Pinging 192.168.3.22 with 32 bytes of data:

Reply from 192.168.3.22: bytes=32 time<1ms TTL=126
Reply from 192.168.3.22: bytes=32 time<1ms TTL=126
Reply from 192.168.3.22: bytes=32 time<1ms TTL=126
Reply from 192.168.3.22: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.3.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

可见路由已成功配置

Switch

```
Switch#show mac address-table
Mac Address Table
```


| Vlan | Mac Address | Type | Ports |
|------|----------------|---------|-------|
| 1 | 0005.5e6c.0551 | DYNAMIC | Fa1/1 |
| 1 | 00e0.a3a5.b8ed | DYNAMIC | Fa0/1 |

其对应 MAC 地址分别为 Router0 和 Router1, 证明数据包从 Switch 经过

3) 清除 MAC 地址表, 启动 Wireshark 捕获, 用 PC0 ping PC1, 查看 PC3 是否可以捕获到 ARP 包、Echo 请求包和 Echo 相应包。如果有则对捕获的包截屏。查看并记录 (截屏) PC0 的 ARP 缓冲区。最后, 对结果进行分析。

根据 Packet Tracer 的模拟, 显然 PC3 不能捕获到任何包, 因为 ping 的数据路径为


PC0 → Router0 → Switch → Router1 → PC1

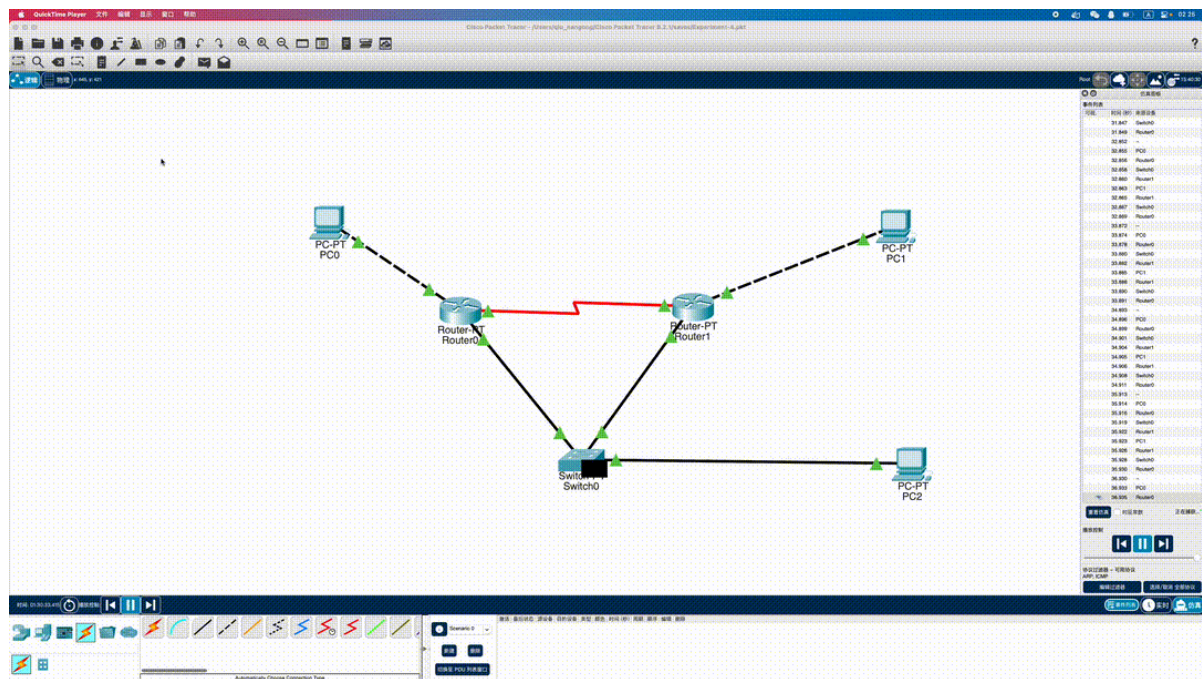


4) 重新启动Wireshark捕获, 用PC1 ping PC0, 查看是否可以捕获到 ARP 包、Echo 请求包和 Echo 响应包。如果有则对捕获的包截屏。查看并记录 (截屏) PC0 的 ARP 缓冲区。最后, 对结果进行分析。

与 3) 同理, 显然 PC3 不能捕获到任何包, 因为 ping 的数据路径为


PC0 -> Router0 -> Switch -> Router1 -> PC1

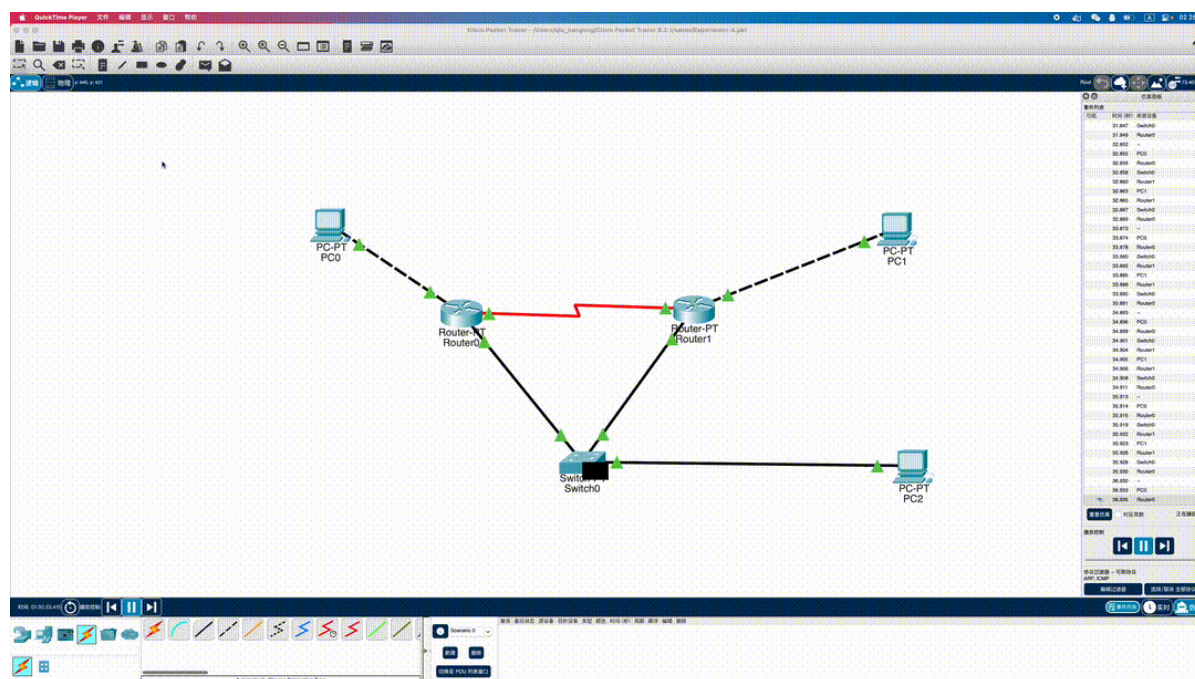

5) 利用 Packet Tracer 数据包的 Flash 动画功能, 在模拟模式下, 展示 PC0 与 PC1 间的数据包流动情况

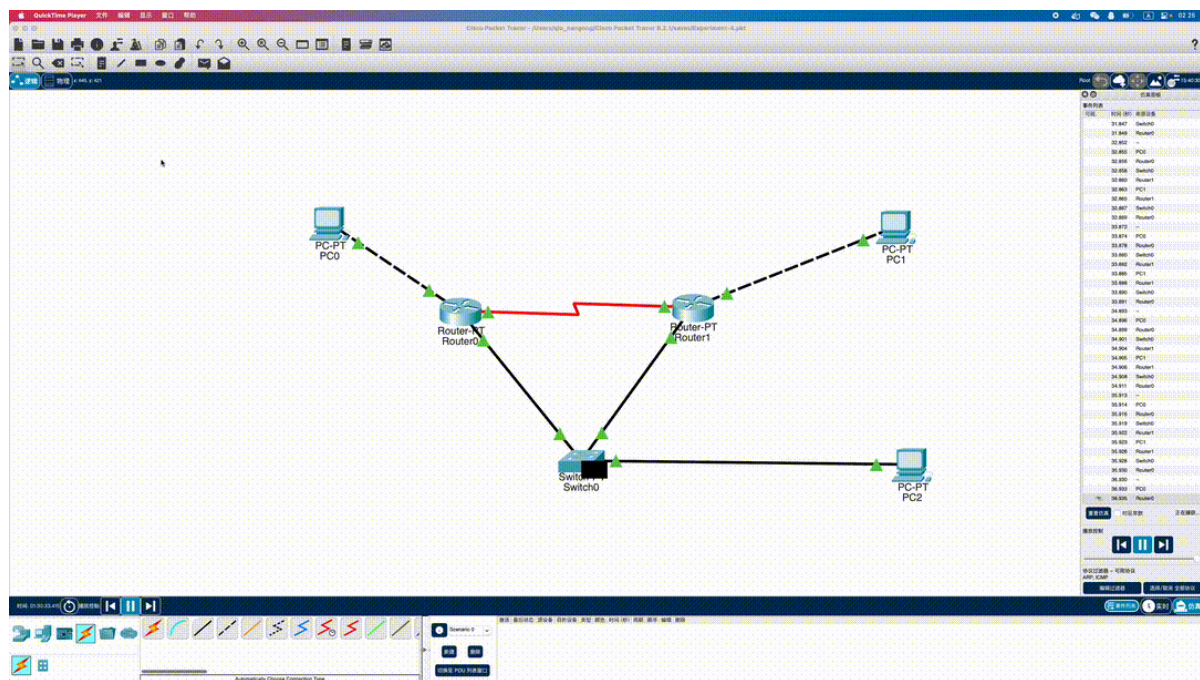

6) 把交换机的端口 F1/1 镜像到端口 F2/1, 再用 PC0 ping PC1。查看 PC3 是否可以捕获到 ARP 包、Echo 请求包和 Echo 响应包, 如果可以捕捉到, 则记录结果 (截屏)。查看并记录此时交换机的 MAC 地址表。对结果进行解释说明。

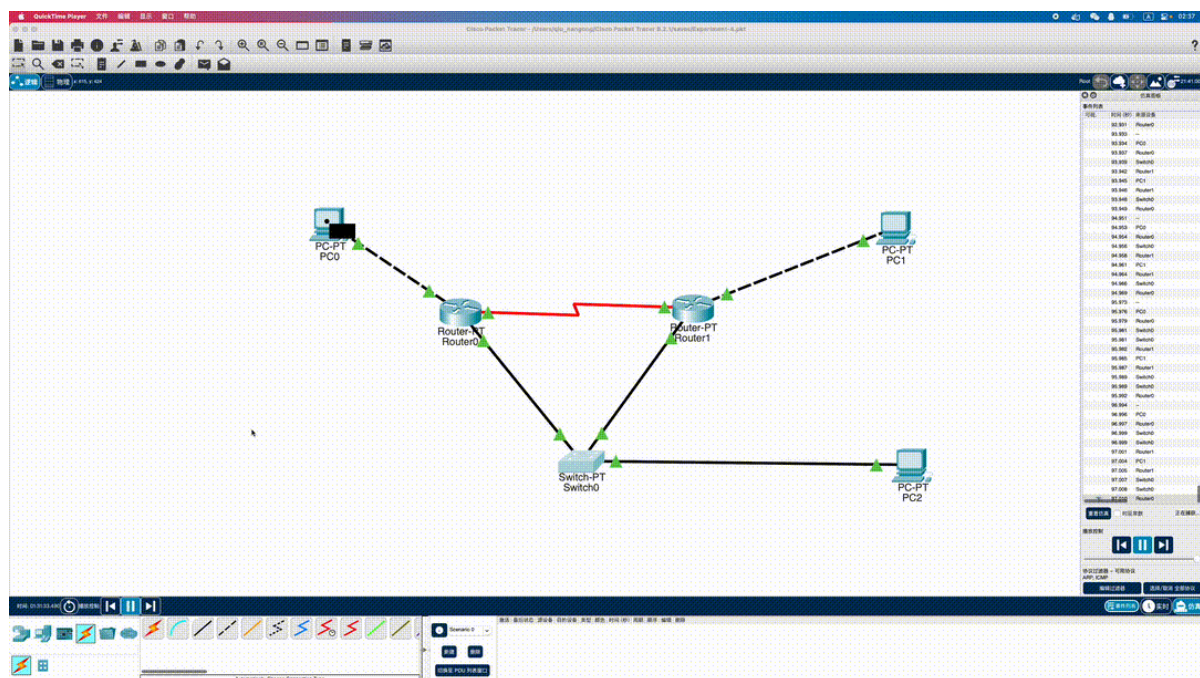

可见数据包在进行镜像后被分发到 PC2, 故 PC2 能够捕获到包

此时的交换机 MAC 地址表为

Switch

```
Switch#show mac address-table
```


Mac Address Table

| Vlan | Mac Address | Type | Ports |
|------|----------------|---------|-------|
| 1 | 0005.5e6c.0551 | DYNAMIC | Fa1/1 |
| 1 | 00e0.a3a5.b8ed | DYNAMIC | Fa0/1 |

由于其仅进行镜像转发，无需与 PC2 建立连接，故仅有 Router0/1 的 MAC 地址

7) 将 5) 重做一次

详见 6)

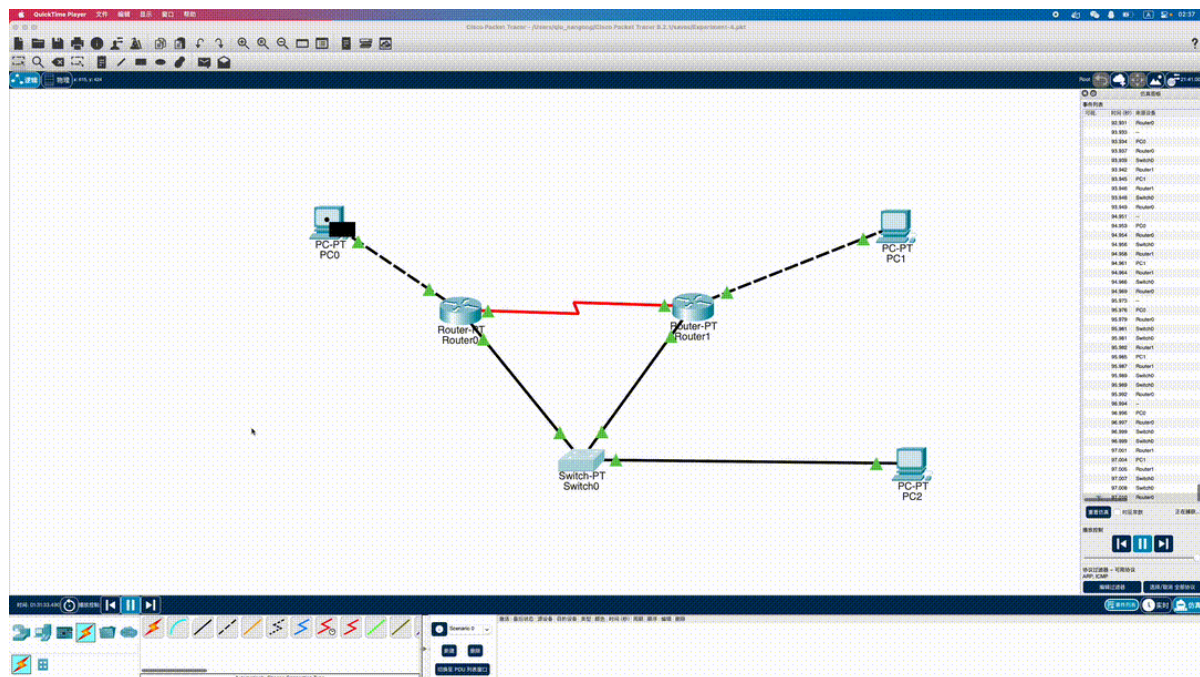

8) PC0 运行 `ping -r 6 -l 200 192.168.3.22` 和 `ping -s 4 -l 200 192.168.3.22`（分别带路径和时间戳 ping PC1），在 PC2 上用 Wireshark 进行观察。找出 Echo 请求分组、Echo 响应分组、Timestamp 请求分组、Timestamp 相应分组进行展开并分别截屏。

自评

| 学号 | 学生 | 自评分 |
|----------|-----|-----|
| 21307289 | 刘森元 | 96 |
| 21307355 | 黄梓宏 | 93 |
| 21307357 | 刘思昊 | 92 |