

Safe Operating Limits

Spring Rate(K)	21.01 $\pm$ 2.1 N/mm [119.997 $\pm$ 12 lbf/in]
Max Safe Load(MSL)	239.07 $\pm$ 23.91 N [53.746 $\pm$ 5.375 lbf]
Max Safe Deflection(MSD)	11.38 mm [0.4479 in]
Spring Index(SI)	5.278

Dimensions & Geometry

Wire Diameter(WD)	2.286 $\pm$ 0.02 mm [0.090 $\pm$ 0.0009 in]
Outer Diameter(OD)	14.35 $\pm$ 0.38 mm [0.565 $\pm$ 0.015 in]
Mean Diameter(MD)	12.07 mm [0.475 in]
Inner Diameter(ID)	9.779 $\pm$ 0.38 mm [0.385 $\pm$ 0.015 in]
Free Length(FL)	45.47 $\pm$ 1.27 mm [1.790 $\pm$ 0.05 in]
Active Coils(AC)	7.000 $\pm$ 0.25 coils
Total Coils(TC)	9.000 $\pm$ 0.25 coils
Solid Height(SH)	22.86 $\pm$ 1.6 mm [0.900 $\pm$ 0.063 in]
Pitch	5.515 mm [0.2171 in]
Rise Angle	8.279 deg
Wire Length	344.15 mm [13.549 in]
Weight per 1000	11.299 kg [24.911 lbs]

End Configurations

End Type(ET)	Closed & Squared (C)
Wind Direction(DW)	Right Hand (RH)

Material Properties

Material Type(MT)	Stainless Steel (17-7)
Min Tensile Strength	1690 MPa [245114 psi]
Shear Modulus(G)	75.68K MPa [10976591.4 psi]


Stress Factors

Allow Shear Stress	794.3 MPa [115203 psi]
Wahl Factor	1.2919

PART NUMBER: PC090-565-9000-177-1790-C-N-IN

SPRING TYPE: Compression

DATE: 9/14/2026

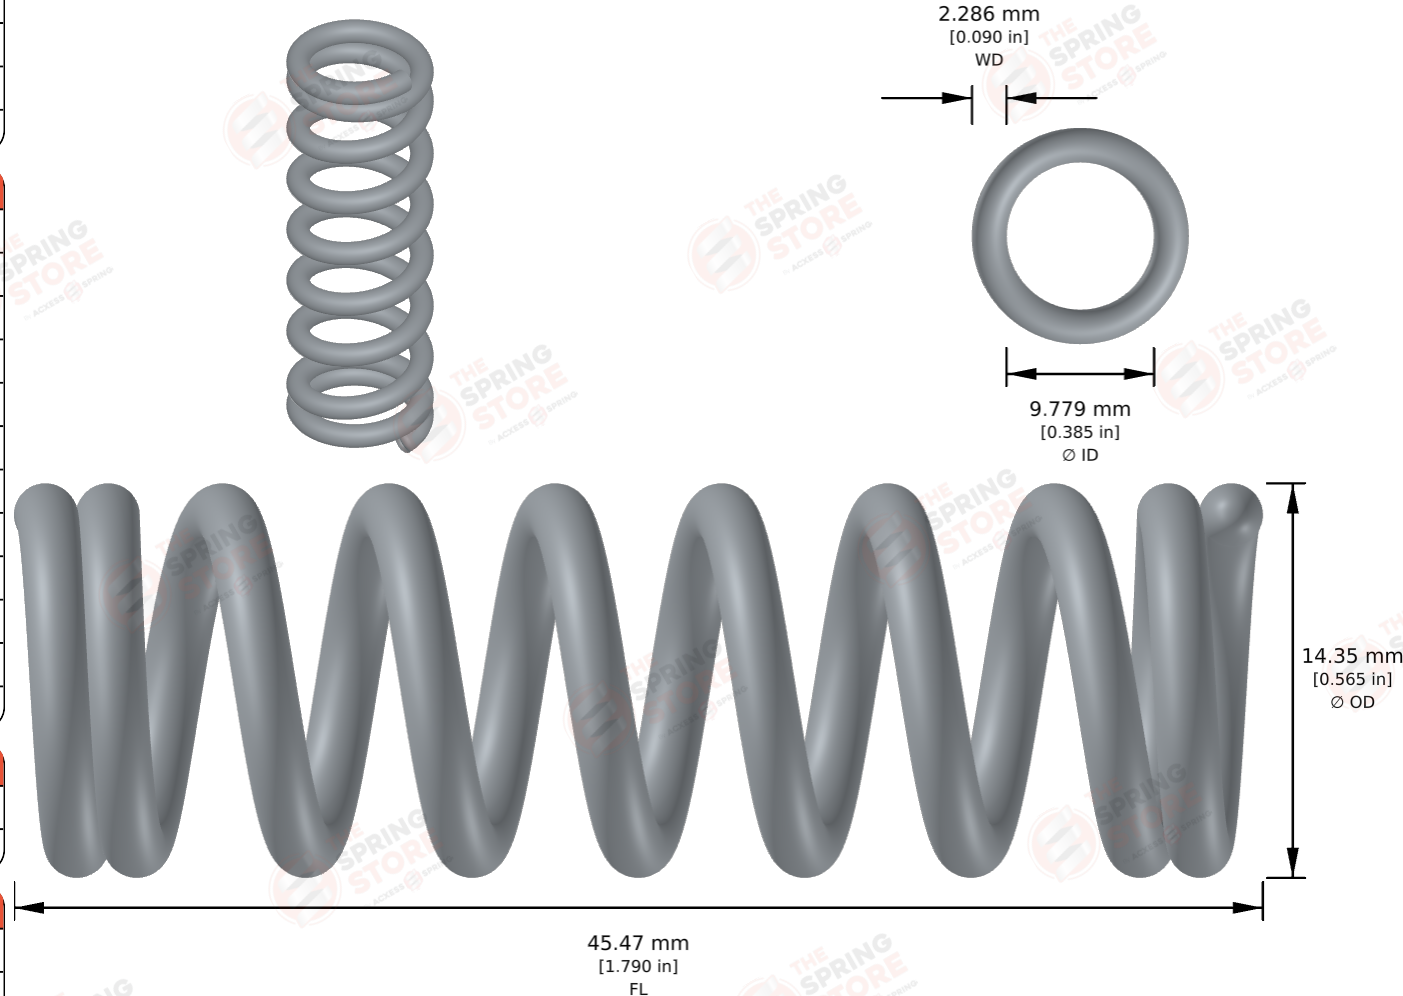

NOTES

REVISION:

DRAWN BY:

APPROVED BY:

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Access Spring makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specification.

This drawing is the property of Access Spring. It may contain confidential, proprietary information, that is Access Spring property. Do not disclose to or duplicate for others except as authorized by Access Spring.