Illumination

Basic Terms

- Illumination: the transport of energy from light sources to surfaces & points
  - Local illumination
  - Global illumination

- Lighting model or Illumination model: Express the factors determining a surface's color or luminous intensity (outgoing or reflected light) at a particular 3D point

Components of Illumination

- Two components of illumination:
  1. **Light sources**
  2. **Surface properties**
- Light source described by a luminance/intensity 'I'
  - Each color is described separately
  - I = [I r I g I b] T (I for intensity)
- Types of Light Sources:
  1. Ambient Light
  2. Diffuse Light
  3. Spot Light

Ambient Light

- No identifiable source or direction
- Product of multiple reflections of light from the many surfaces present in the environment
- Computationally inexpensive

Ambient Light

Categories:

1. Global ambient light
    – Independent of light source
    – Lights entire scene
    – Example: reflection of sunlight from several surfaces
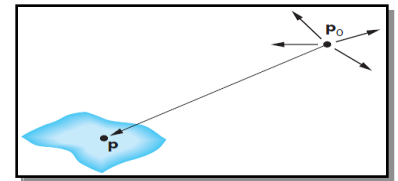
2. Local ambient light
    – Contributed by additional light sources
    – Can be different for each light and primary color
    – Example: Reflection of fluorescent lamps from several surfaces
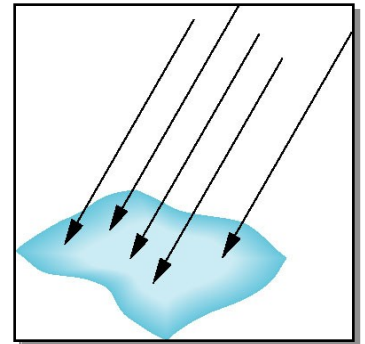
Diffuse Light

- **Point Source**
  - Given by a point
  - Light emitted equally in all directions
  - Intensity decreases with square of distance
  - Point source [x y z 1]^T
  - At point p, intensity received

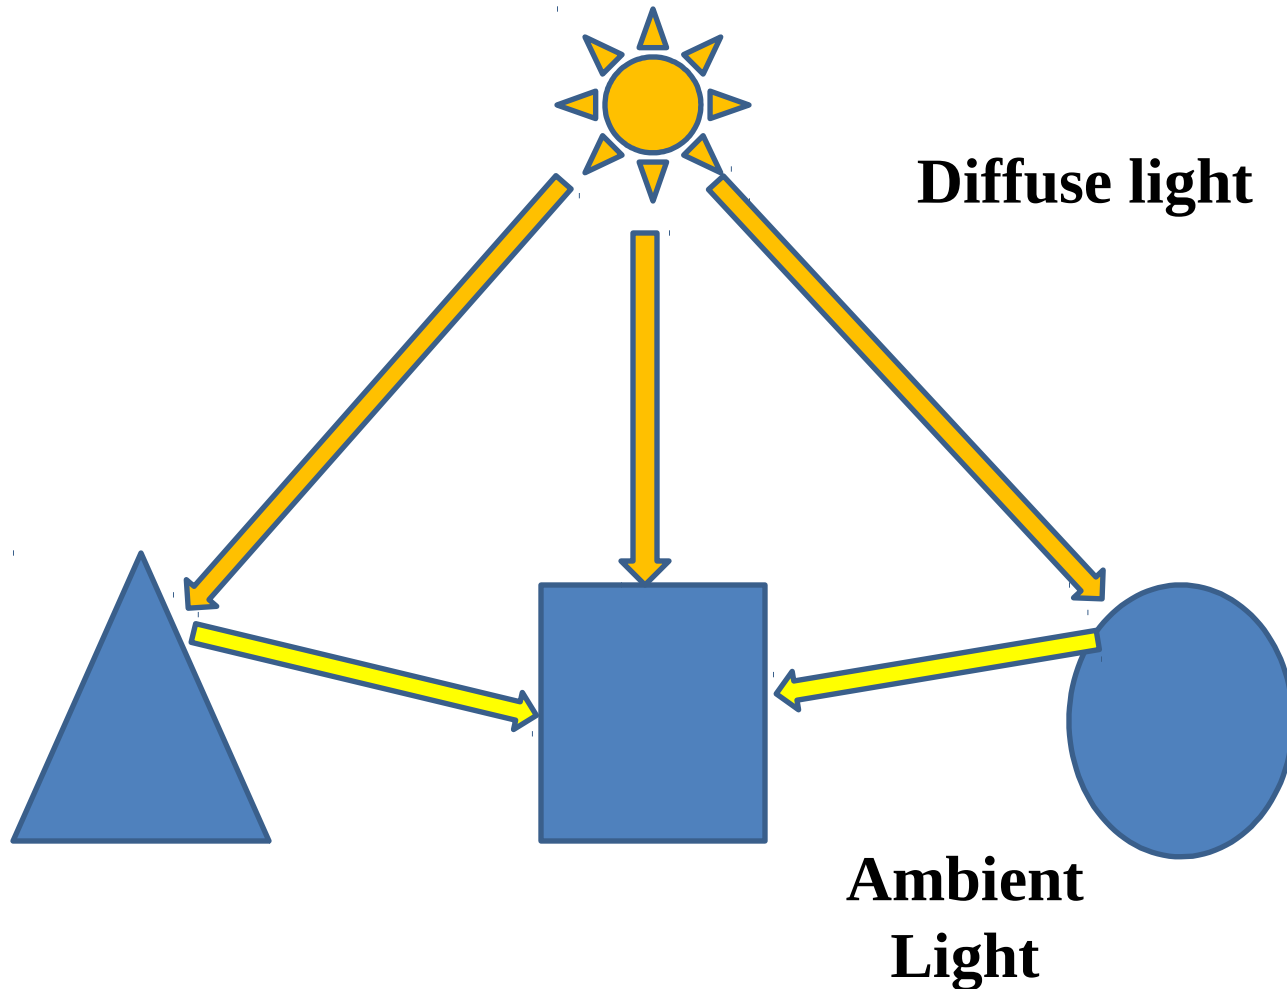$$i(p, p_0) = \frac{1}{|p - p_0|^2} I(p_0).$$

- **Directional Source**
  - Given by a direction
  - Simplifies some calculations
  - Intensity dependents on angle between surface normal and direction of light
  - Distant source [x y z 0]^T

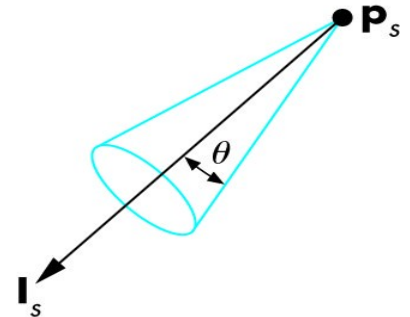# Ambient light vs Diffuse light

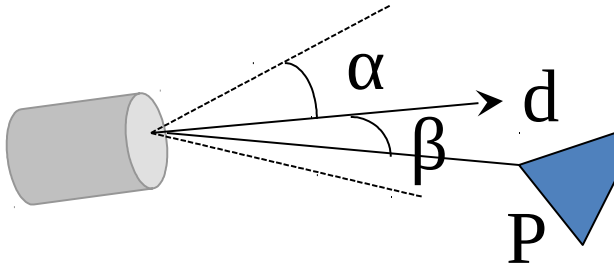
Diffuse light

Ambient Light

Spot Light

- *Spotlight* is a point source that emits light in restricted set of directions,
  - Requires color, point, direction, falloff parameter
  - usually direction boundary forms a cone shape.
  - Here θ is Cutoff Cone. No light is seen at points lying outside Cutoff angle.

- Intensity falls off directionally

Spot Light

- Consider, a spot light aimed at direction d.
  - $\boldsymbol{\beta}$ is the angle between aimed direction $\boldsymbol{d}$ and a line from source to object $\boldsymbol{P}$
  - Source has cut off angle $\boldsymbol{\alpha}$ and intensity $\boldsymbol{I}$
 - Intensity of spot light received at $\boldsymbol{P}$ is

Intensity at P = $I \cos^{\varepsilon}(\beta)$

Types of surface

Interaction between light and material can be classified as

- **Specular surfaces** – Ideal mirror

- **Diffuse surfaces** – Reflected light is ideally reflected to all directions uniformly

- **Translucent surfaces** – allow some lights to penetrate the surface – refraction – glass, water

(a)   (b)   (c)
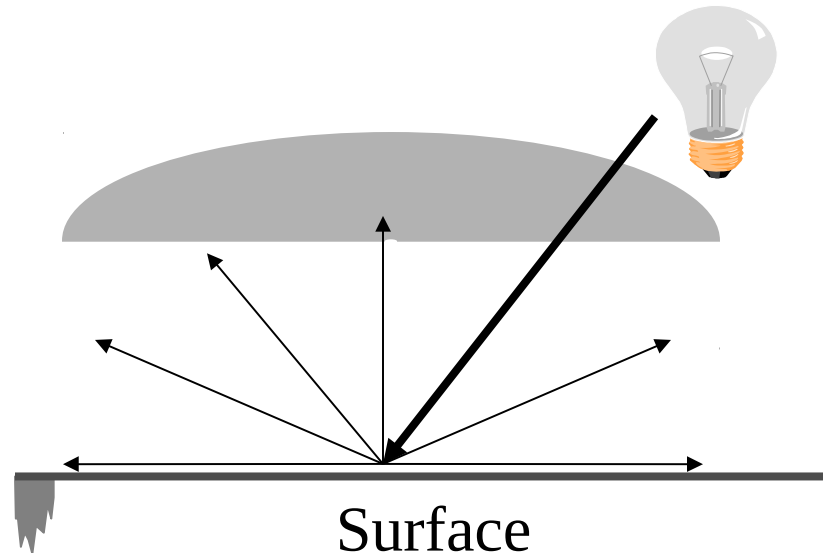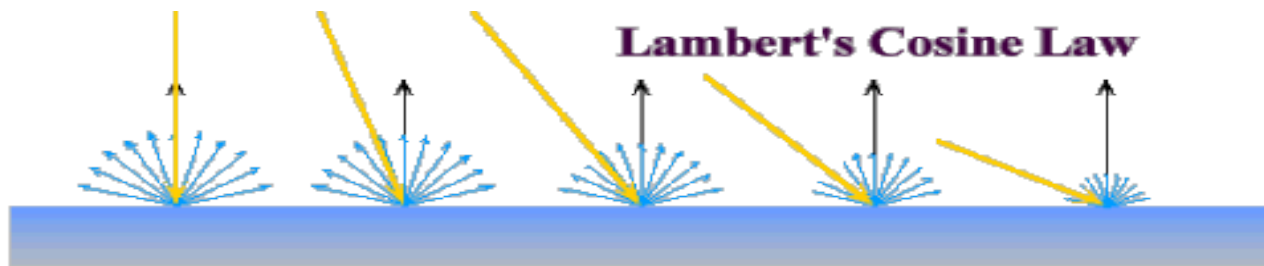
Reflection

Defuse Reflectance, Specular Reflectance

Ideal Diffuse Reflectance

- Assumes surface reflects equally in all directions.

- An ideal diffuse surface is, at the microscopic level, a very rough surface.
 – Example: chalk, clay, some paints

Surface

Ideal Diffuse Reflectance

- Ideal diffuse reflectors reflect light according to <u>Lambert's cosine law</u>.

- Lambert's law determines how much of the incoming light energy is reflected. The reflected intensity is independent of the viewing direction.

- But reflected light intensity depends on incident angle of light.

Ideal Diffuse Reflectance

- Suppose light is incident on diffuse surface S.
    - m = direction of Normal of the surface
    - v = viewer's direction
    - s = direction of incident light
    - θ = incident angle
    - I_s = Intensity of Light Source
    - Intensity of reflected light, I_d
  - $I_d = I_s \, Þ_d \, (s.m/|s||m|)$, where $Þ_d$ is *the diffuse reflectance coefficient.*
  - If θ is negative, then $I_d = \max(I_s \, Þ_d \, (s.m/|s||m|), 0)$
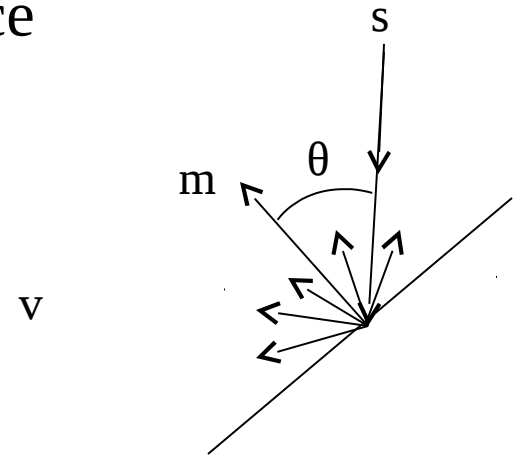
Ideal Specular Reflection

- Reflection is only at mirror angle. An ideal mirror is a purely specular reflector.
  - View dependent reflection. That is, reflected light's intensity varies with viewr's position.
  - Intensity of refelcted light is strong near mirror angle and strongest at mirror angle.
 - An Ideal specular reflection follows Snell's Law.

Snell's Laws:
- The incoming ray and reflected ray lie in a plane with the surface normal
- The angle that the reflected ray forms with the surface normal equals the angle formed by the incoming ray and the surface normal.

Non-ideal Reflectors

- Simple Empirical Model:
  - We expect most of the reflected light to travel in the direction of the ideal ray.
  - However, because of microscopic surface variations we might expect some of the light to be reflected just slightly offset from the ideal reflected ray.
  - As we move farther and farther, in the angular sense, from the reflected ray we expect to see less light reflected.
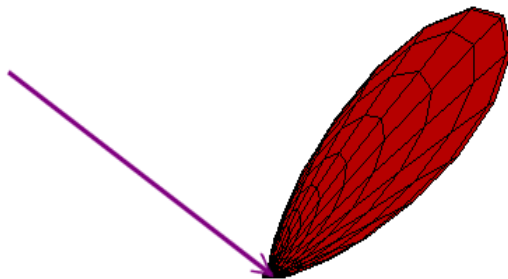
Non-ideal Reflectors

- Phong model approximates the fall off of specular reflection.
- The cosine term is maximum when the surface is viewed from the mirror direction and falls off to 0 when viewed at 90 degrees away from it.
- The scalar n_{shiny} controls the rate of this fall off
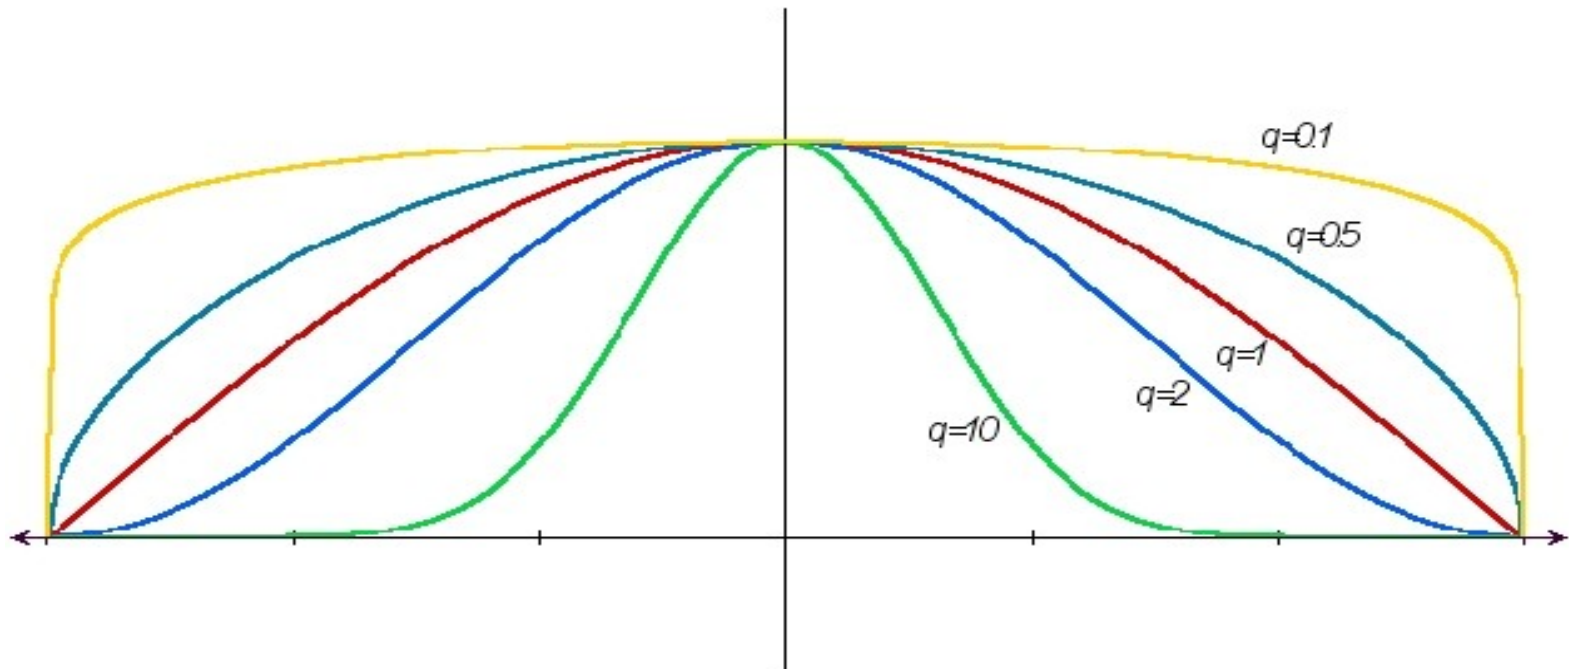
Phong Model

- Compute the combined impact of ambient, diffuse and specular reflectance at a point on surface
- Also called Local Illumination model as its main focus is on the direct impact of light coming from a source.
- This model has no physical basis, yet it is one of the most commonly used illumination models in computer graphics.

Phong Model

- Also models secondary effect of light.

- *Consider a point light source p and viewpoint v. What should be color of light reflected into viewer's eye from point Q of the surface?*

  - *Consider **diffuse** component, **specular** component of the incident light and **ambient** light present in the environment*
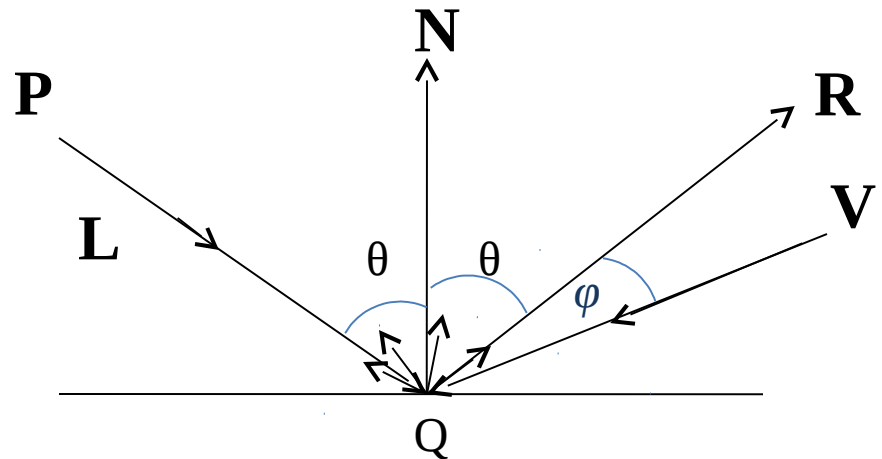
Mathematical Calculation of Phong Model

- First we consider, 2 extreme cases of light reflection.
  - Diffuse Reflection :

    $I_d \propto \cos\theta$
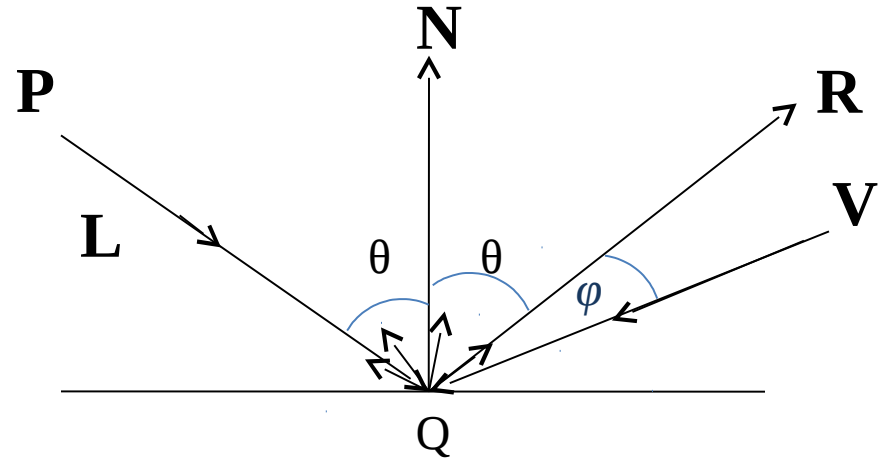
    $\propto = I_p \, k_d \cos\theta$

    $= I_p \, k_d \, (\mathbf{L.N})$

  - Specular Reflection:

  - $I_s \propto (\cos\varphi)^k$

    $= I_p \, k_s \, (\cos\varphi)^k$

    $= I_p \, k_s \, (\mathbf{R.V})^k$

Mathematical Calculation of Phong Model

- We need to ircorporate the effect light present in environment. Thus total refelcted light also includes ambient component.
  - Ambient Component = $I_a k_a$
- Total reflected light intensity from Q,

  I = Ambient Component + Diffuse Component + Specular Component

  $$= I_a k_a + I_p k_d (\mathbf{L}.\mathbf{N}) + I_p k_s (\mathbf{R}.\mathbf{V})^k$$

  $$= I_a k_a + I_p [k_d \max\{(\mathbf{L}.\mathbf{N}),0\} + k_s \max\{(\mathbf{R}.\mathbf{V})^k,0\}]$$

Additional Issues

- When there are n light sources in the scene, their effects are cumulative: Intensity at Q,

  $$I = I_a k_a + \sum_{(i=1 \text{ to } n)} I_{pi} \{k_d (\mathbf{L.N}) + k_s (\mathbf{R.V})^k \}$$

- The intesnsity of red, green and blue component of reflected light,

  $$I_r = I_a k_{ar} + I_p k_{dr} (\mathbf{L.N}) + I_p k_s (\mathbf{R.V})^k$$

  $$I_g = I_a k_{ag} + I_p k_{dg} (\mathbf{L.N}) + I_p k_s (\mathbf{R.V})^k$$

  $$I_b = I_a k_{ab} + I_p k_{db} (\mathbf{L.N}) + I_p k_s (\mathbf{R.V})^k$$

  - k_s is same as color of specular component is same as color of light source, not affected by surface color.

How to get vector **R ?**

- Find a formula to compute R, the reflection of vector L with respect to normal vector?

$$\mathbf{R} = 2\,(\mathbf{L}.\mathbf{N})\mathbf{N} - \mathbf{L}$$

(see Solved Problem 11.10 in Schaum(2nd edition))

Blinn and Torrence Variation

- Calculation of **R** is computaionally expensive. So in phong model the term **R**.**V** is somtimes replaced by **N**.**H** , where **H** is a unit vector that bisect the angle between **L** and **V**.

  - angle between N and H measures the falloff of intensity.

  - Though calculation of N.H is is computaionally inexpensive relative to R.V, but N.H is not always equal to R.V . In that case calculation of specular component will be approximate. (see Solved Problem 11.11 in Schaum(2nd edition)))

Effect of the reflection coefficients

Diffuse Reflection Coefficient

- $I_d = \max \{I_s \rho_d \cos \Theta, 0\}$

- Source intensity is 1.0

- Background intensity is 0.4

- Sphere reflecting diffuse light, for six reflection coefficients: 0, 0.2, 0.4, 0.6, 0.8, and 1.
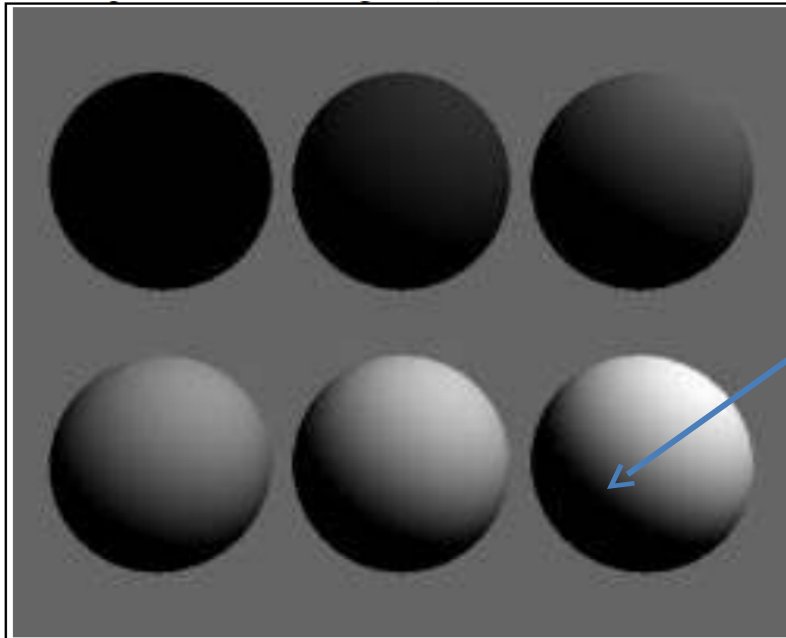
Angle Θ between surface normal and incident light is $> 90^o$

Figure 8.11. Spheres with various reflection coefficients shaded with diffuse light. (file: fig8.11.bmp)

Ambient Reflection Coefficient

- Effect of adding ambient light to the diffuse light reflected by a sphere
- Diffuse source intensity is 1.0
  Diffuse reflection coefficient is 0.4
   Ambient source intensity is 1.0
- Moving from left to right the ambient reflection coefficient takes on values: 0.0, 0.1, 0.3, 0.5, and 0.7
  - Too little ambient light makes shadows appear too deep and harsh
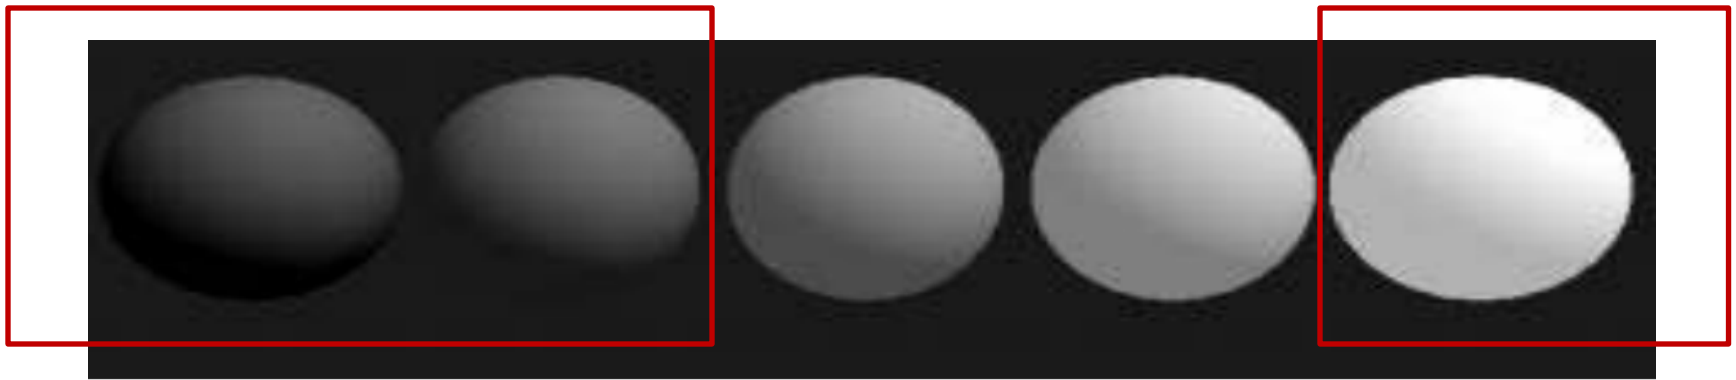 - Too much makes the picture look washed out and bland

Figure 8.16. On the effect of ambient light.

Specular Reflection Coefficient

- The ambient and diffuse reflection coefficients are 0.1 and 0.4 for all spheres.

- $I_d = Is \, \rho_s \, \cos(\varphi)^f$

More shiny and more highly concentrated along the direction r

Exponent f

More mirror like, more focused reflection with increasing exponent

3   6   9   25   200

reflection coefficient ρ_s

0.25

0.5

0.75

Figure 8.15. Specular reflection from a shiny surface.
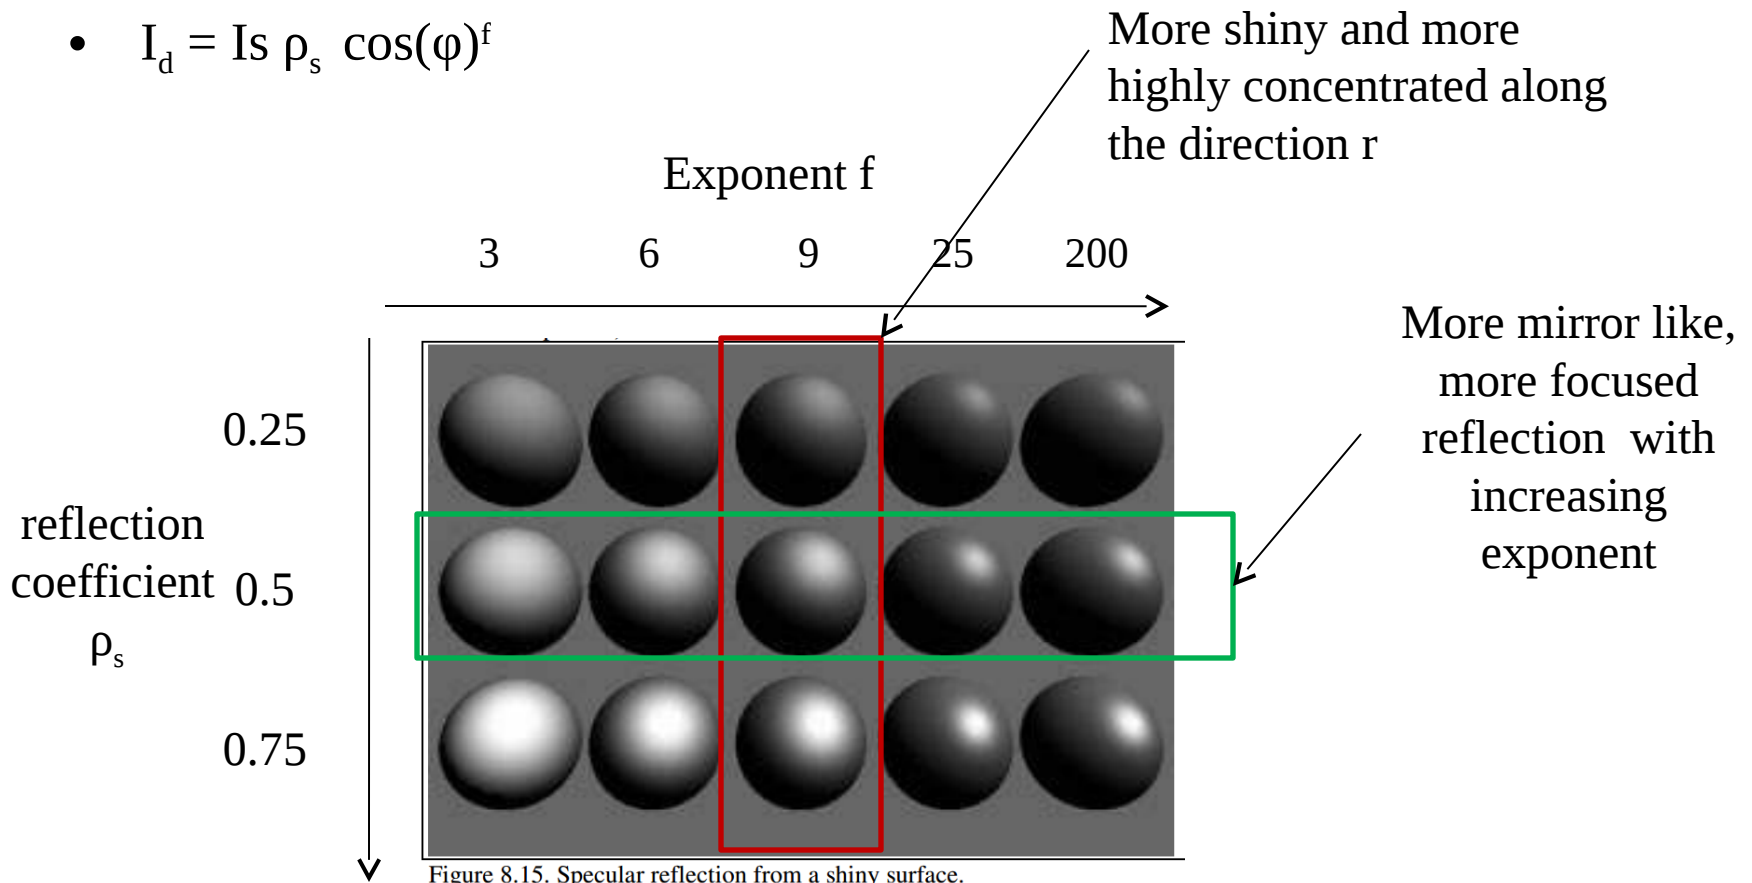
Color

Adding Color

- Color is constructed by adding certain amounts of red, green, and blue light
- light sources have three "types" of color:

$$\text{ambient} = (I_{ar}, I_{ag}, I_{ab}), \text{diffuse} = (I_{dr}, I_{dg}, I_{db}), \text{and specular} = (I_{spr}, I_{spg}, I_{spb})$$

Adding Color

- Surface has two sets of reflection co-efficient

ambient reflection coefficients: ρ_{ar}, ρ_{ag}, and ρ_{ab},

diffuse reflection coefficients: , ρ_{dr}, ρ_{dg}, and ρ_{db}

- Color of the specular component is often the same as that of the light source – mirror like:

    ρ_{sr}, ρ_{sg}, $\rho_{sb} = \rho_s$

    - Glossy red apple when illuminated by a yellow light is yellow rather than red

What makes an apple red?
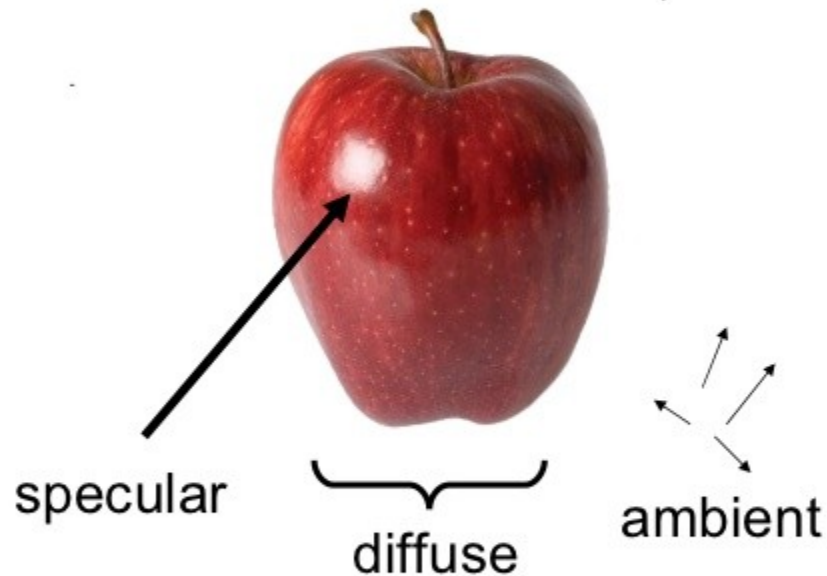

specular

diffuse

ambient

Image synthesis view:
"light, surface, and material interact to reflect light perceived as color, modeled via simplifying assumptions"

Adding Color

- By "color" of a surface we mean the color that is reflected from it when the illumination is white light
- The ambient and diffuse reflection coefficients are based on the color of the surface itself.

Color of an object

- Color of a sphere is 30% red, 45% green, and 25% blue
- Ambient light in environment:
  White light (Isr= Isg= Isb = I)
- Sphere's ambient and diffuse reflection coefficients:
  $I_{ar}=I_{dr}=0.3K$
  $I_{ag}=I_{dg}=0.45K$
  $I_{ab}=I_{db}=0.25K$
- The individual diffuse components have intensities
  $I_{dr}= 0.3\ K\ I$
  $I_{dg}= 0.45\ K\ I$
  $I_{db}= 0.25\ K\ I$

- Reddish Object in Greenish Light ?
  Think!

Reference

- Hill: 8.2.1 - 8.2.6