The Furuta Pendulum

Technical Report

Tabea Wilke · **Maximilian Gehrke** · **Yannik Frisch**

Abstract The Furuta Pendulum is an example of a complex non-linear system and therefore of big interest in control system theory. It consists of one controllable arm rotating in the horizontal plane and one pendulum uncontrollably moving in the vertical plane, which is attached to the end of this arm.
The non-linearities result from an interplay between gravitational, coriolis, centrifugal forces and friction.
XX We present an overview over it's technical details and proposed algorithms to solve the control problem. XX

1 Introduction

Many examples of the field of control engineering like aircraft landing, aircraft stabilizing and many more can be very well modelled by an inverted pendulum [1]. As a reaction to problems with the limited movement of the cart from the inverted pendulum, the furuta pendulum (also called rotary inverted pendulum) has been developed by Furuta et al.. The advantages of the furuta pendulum are that needs less space and one moving arm is directly linked to the motor, therefore, the dynamics is less unmodeled thanks to a power transmission mechanism [5]. The furuta pendulum is an underactuated problem, this means that there two degrees of freedom (ϕ, θ), but only one arm is directly controlled by the motor. This is the one which changes the angle ϕ in the horizontal plane. The other arm called pendulum is attached to the end

F. Author
first address
Tel.: +123-45-678910
Fax: +123-45-678910
E-mail: fauthor@example.com

S. Author
second address

of the controlled arm and therefore is moved indirectly by it in the vertical plane with angle θ [17, 18]. The whole system is highly non-linear as a result of an interplay between gravitational, coriolis, friction and centrifugal forces [9]. Finally, there are two
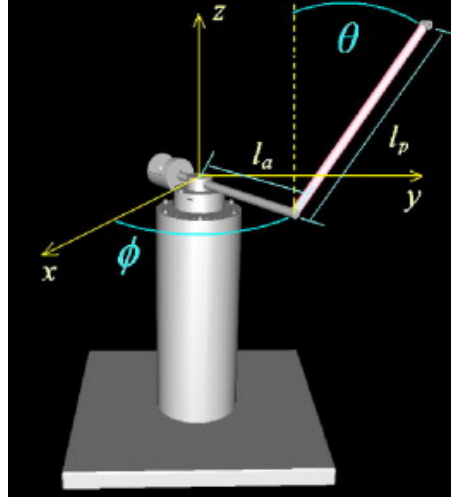

Fig. 1 The furuta pendulum, figure from [11]

different types of control problems. First, bringing the flexible arm from a hanging position to a position which is nearly upright, further called "swing-up". Second, if the arm is nearly upright with low enough speed, balancing it to hold this state stable, called "stabilization".

1.1 Definitions

The system consists of an arm with length l_a mounted to a DC motor, which is able to apply a torque of τ to it. It has a mass of m_a which is located at l_1 alongside the arm. Another arm with length l_p and mass m_p is attached to the remaining side of the first arm. Both arms have a moment of inertia J_a and J_p respectively. The counter force to the input torque is the viscous damping B_a because of the bearings of the motor. As the pendulum is not controlled directly, the only force it is applied to is damping at the connection to the arm B_p. The angle θ is zero if the pendulum is in an perfectly upright position. The only influence we can take on the system is the voltage V_m we give to the DC motor.

2 Mathematical Modelling[1]

For later derivation of the Lagrangian, the kinetic and potential engergies of the furuta pendulum are needed. Therefore, the kinematics of the pendulums center of gravity can be described by

$$\begin{cases} x & = l_a \cos\phi - l_p \sin\theta \sin\phi \\ y & = l_a \sin\phi + l_p \sin\theta \cos\phi \\ z & = l_p \cos\theta \end{cases}$$

The relative velocity of the pendulum to the arm can be represented by

$$\begin{cases} \dot{x} & = -l_a \sin\phi\dot{\phi} - l_p \cos\phi \sin\theta\dot{\phi} - l_p \sin\phi \cos\theta\dot{\theta} \\ \dot{y} & = l_a \cos\phi\dot{\phi} - l_p \sin\phi \sin\theta\dot{\phi} + l_p \cos\theta \cos\phi\dot{\theta} \\ \dot{z} & = -l_p \sin\theta\dot{\theta} \end{cases}$$

For the energy terms a squared velocity is needed, which is the scalar product of the squared velocities in all directions:

$$\begin{aligned} v^2 &= \dot{x}^2 + \dot{y}^2 + \dot{z}^2 \\ &= (l_a^2 + l_p^2 \sin^2\theta)\dot{\phi}^2 + l_p^2\dot{\theta}^2 + 2l_a l_p \dot{\phi}\dot{\theta}\cos\theta \end{aligned}$$

First of all, we will derive the equations of motion through the Euler-Lagrange method. The Lagrangian function can be obtained by the difference of the kinetic and potential energies $L = T - V$, with T as the total sum of the kinetic energies in the system and V the total potential energies. The only potential energy which is in the system is the one of the pendulum:

$$V_{total} = V_{pendulum} = m_p g z = m_p g l_p \cos\theta$$

Kinetic energy is available both in the arm and in the pendulum and is composed of the the sum of translation energy and rotational energy:

$$\begin{aligned} T_{arm} &= \frac{1}{2}J_a\dot{\phi}^2 \\ T_{pendulum} &= \frac{1}{2}J_p\dot{\theta}^2 + \frac{1}{2}m_p v^2 \\ &= \frac{1}{2}J_p\dot{\theta}^2 + \frac{1}{2}m_p \left((l_a^2 + l_p^2 \sin^2\theta)\dot{\phi}^2 + l_p^2\dot{\theta}^2 + 2l_a l_p \dot{\phi}\dot{\theta}\cos\theta\right) \\ T_{total} &= \frac{1}{2}J_a\dot{\phi}^2 + \frac{1}{2}J_p\dot{\theta}_0^2 + \frac{1}{2}m_p \left((l_a^2 + l_p^2 \sin^2\theta)\dot{\phi}^2 + l_p^2\dot{\theta}^2 + 2l_a l_p \dot{\phi}\dot{\theta}\cos\theta\right) \end{aligned}$$

From this the Lagrange Function arises:

$$\begin{aligned} L &= T_{total} - V_{total} \\ &= \frac{1}{2}J_a\dot{\phi}^2 + \frac{1}{2}J_p\dot{\theta}^2 + \frac{1}{2}m_p \left((l_a^2 + l_p^2 \sin^2\theta)\dot{\phi}^2 + l_p^2\dot{\theta}^2 + 2l_a l_p \dot{\phi}\dot{\theta}\cos\theta\right) \\ &\quad - m_p g l_p \cos\theta \end{aligned}$$

---

[1] [1, 5, 6, 12, 19, 4]

Lagrange's Equation follows

$$\frac{d}{dt}\left(\frac{\partial L}{\partial \dot{q}_i}\right) - \frac{\partial L}{\partial q_i} + \frac{\partial F}{\partial \dot{q}_i} = 0$$

Thereby, the variables q_i are called generalized coordinates and F is the friction in the system. The friction in the system can be described by $B_p\dot{\theta}$ and $B_a\dot{\phi}$ For the furuta pendulum the generalized coordinates are $\dot{q}(t)^T = \left[\frac{\partial \phi(t)}{\partial t} \frac{\partial \theta(t)}{\partial t}\right]$ which leads to

$$\frac{\partial^2 L}{\partial t \partial \dot{\phi}} - \frac{\partial L}{\partial \phi} = \tau - B_a\dot{\phi}$$

$$\frac{\partial^2 L}{\partial t \partial \dot{\theta}} - \frac{\partial L}{\partial \theta} = -B_p\dot{\theta}$$

The partial derivations of the Lagrangian for the generalized coordinates are:

$$\frac{\partial L}{\partial \phi} = 0$$

$$\frac{\partial L}{\partial \dot{\phi}} = \dot{\phi}(J_a + m_p(l_a^2 + l_p^2 \sin^2 \theta)) + \dot{\theta}(m_p l_a l_p \cos \theta)$$

$$\frac{\partial^2 L}{\partial t \partial \dot{\phi}} = \ddot{\phi}(J_a + m_p(l_a^2 + l_p^2 \sin^2 \theta)) + l_p^2 m_p \sin(2\theta)\dot{\phi}\dot{\theta} + m_p l_a l_p(\cos \theta \ddot{\theta} - sin\theta \dot{\theta}^2)$$

$$\frac{\partial L}{\partial \theta} = \frac{1}{2}\dot{\phi}^2 m_p l_p^2 \sin(2\theta) - m_p l_a l_p sin\theta \dot{\phi}\dot{\theta} + m_p g l_p sin\theta$$

$$\frac{\partial L}{\partial \dot{\theta}} = \dot{\theta}(J_p + m_p l_p^2) + \dot{\phi}(m_p l_a l_p \cos \theta)$$

$$\frac{\partial^2 L}{\partial t \partial \dot{\theta}} = \ddot{\theta}(J_p + m_p l_p^2) + \ddot{\phi}m_p l_a l_p \cos \theta - \dot{\phi}\dot{\theta}m_p l_a l_p \sin \theta$$

With this equations it is possible to derive the equations for the Euler-Lagrange's Equation:

$$\frac{\partial^2 L}{\partial t \partial \dot{\phi}} - \frac{\partial L}{\partial \phi} = \ddot{\phi}(J_a + m_p(l_a^2 + l_p^2 \sin^2 \theta)) + l_p^2 m_p \sin(2\theta)\dot{\phi}\dot{\theta}$$
$$+ m_p l_a l_p(\cos \theta \ddot{\theta} - sin\theta \dot{\theta}^2)$$

$$\frac{\partial^2 L}{\partial t \partial \dot{\theta}} - \frac{\partial L}{\partial \dot{\theta}} = \ddot{\theta}(J_p + m_p l_p^2) + \ddot{\phi}m_p l_a l_p \cos \theta - \frac{1}{2}\dot{\phi}^2 m_p l_p^2 \sin(2\theta) - m_p g l_p sin\theta$$

Putting this into a matrix form and filling in the friction, this results in the nonlinear equations of motion (EOM) for the furuta pendulum.

$$\begin{bmatrix} J_a + m_p(l_a^2 + l_p^2 \sin^2 \theta) & m_p l_a l_p \cos \theta \\ m_p l_a l_p \cos \theta & J_p + m_p l_p^2 \end{bmatrix}\begin{bmatrix} \ddot{\phi} \\ \ddot{\theta} \end{bmatrix} +$$
$$\begin{bmatrix} m_p l_p^2 \sin(2\theta)\dot{\theta} - B_a & -m_p l_a l_p \sin \theta \dot{\theta} \\ -\frac{1}{2}m_p l_p^2 \sin(2\theta)\dot{\phi} & -B_p \end{bmatrix}\begin{bmatrix} \dot{\phi} \\ \dot{\theta} \end{bmatrix} + \begin{bmatrix} 0 \\ -m_p l_p g \sin \theta \end{bmatrix} = \begin{bmatrix} \tau \\ 0 \end{bmatrix}$$

2.1 Linearization of the state-soace model

As all equations of motion contain a part of a trigonometric function the equations are non-linear. There are several different methods to change the non-linear equations to linear ones. For a linearization in the state-space the equation $\dot{x} = Ax + Bu + \tilde{d}$ is used. The linearization is done around the operating point [14] which is the vertical inverted state and therefore, uses $\theta = 0$ and $\dot{\theta} = 0$. This results in the following equations: The result is an linear form of the equations of motion which are very close to the system's description by the non-linear model, up to the first 25 degree which Kurode et al. showed.

3 Pendulum Control

The goal of controlling the furuta pendulum is to bring it from a hanging position into a vertical upright position. Therefore, it is necessary to generate enough energy to swing the pendulum up in a nearly upright position where the linear region begins [10]. If this region is reached, the controller should change to the balancing mode to stabilize the upright position.
To check whether the controller needs to be switch from the swing-up task to the stabilize task, the switching criteria can for example be defined by:

$$\text{switching criteria}^2 = \begin{cases} \text{stabilization} & \begin{cases} |\theta| < \frac{\pi}{9} & \text{and } \dot{\theta} < 2.62 \text{ rad/sec} \\ |E - E_r| < 0.04 \text{ Joule} & \text{and } \dot{\theta} < 2.62 \text{ rad/sec} \end{cases} \\ \text{swing-up} & \text{otherwise} \end{cases}$$

3.1 Swing-Up

There are many different approaches for solving the swing-up task of the furuta pendulum, linear ones which use the linearized equations of motion, non-linear ones and model-free approaches. The classical way solving the swing-up task is an approach with energy control [15]. Therefore, the sum of kinetic and potential energy of the pendulum is used to model which amount of energy should be added. The energy of the pendulum can be described by

$$E = \frac{1}{2} J_p \theta^2 + m_p g l_p (\cos\theta - 1)$$

which was already done by Åström and Furuta for the normal pendulum. The selection of the state without energy can be made differently, logically it is the upright state because there is no further need to add energy [15]. There are two different directions in which the energy can be supplied either the pendulum seems to be "pulled" or "pushed". To define this, $\text{sign}(\dot{\theta}\cos\theta)$ the velocity helps to find out whether the pendulum starts to swing in the opposite direction, the $\cos\theta$ defines if the pendulum is

---

2 [7]

in the left or in the right half [3]. The magnitude of energy which should be provided is selected by an aggressivity factor and the difference of actual and desired system energy $k_a(E - E_0)$. Often there is also a saturation function which limits the signal to the maximum acceleration of the pendulum. The whole swing-up controller is then implemented by

$$u = sat(k_a(E - E_0))\text{sign}(\dot{\theta}\cos\theta)$$

3.2 Stabilization

4 Reinforcement Learning on the Furuta Pendulum

In reinforcement learning the furuta pendulum has only a very small influence on the simulation and experimental research because of the complexity of the problem. Only a few algorithms were tested on it with divers results.

Hennig compares Gaussian process optimal learner with Kalman filter, TD(λ) and as baseline full information. He used the same baseline function for all algorithms and collated the cumulated loss. Surprisingly, none of the methods could stabilize the swung up pendulum totally, even not the best method the Gaussian process optimal learner.

Also an artificial neural network (ANN) was used to model the pendulum [13]. They worked with the voltage of the motor as input values and the angles of arm and pendulum as the output. Different numbers of hidden neurons were tested with the result that more neurons in the hidden layer led to a smaller mean squared error. The ANN could foresee the angle of the pendulum very well.

A good approach was done with recurrent neural networks and a Genetic Algorithm [16]. They used a recurrent neural network identifier and controller with a proportional integral derivative controller which was responsible for the feedback and the prediction in the derivative action.

5 Conclusion

The furuta pendulum is a very complex control problem which could be solved by a very wide variety of approaches. The control problem splits into two mayor problems the swing-up and the balancing task.

References

1. Akhtaruzzaman M, Shafie AA (2010) Modeling and control of a rotary inverted pendulum using various methods, comparative assessment and result analysis. In: 2010 IEEE International Conference on Mechatronics and Automation, IEEE, pp 1342–1347
2. Åström KJ, Furuta K (2000) Swinging up a pendulum by energy control. Automatica 36(2):287–295

3. Awtar S, King N, Allen T, Bang I, Hagan M, Skidmore D, Craig K (2002) Inverted pendulum systems: rotary and arm-driven-a mechatronic system design case study. Mechatronics 12(2):357–370

4. Fairus M, Mohamed Z, Ahmad M (2013) Fuzzy modeling and control of rotary inverted pendulum system using lqr technique. In: IOP Conference Series: Materials Science and Engineering, IOP Publishing, vol 53, p 012009

5. Furuta K, Yamakita M, Kobayashi S (1992) Swing-up control of inverted pendulum using pseudo-state feedback. Proceedings of the Institution of Mechanical Engineers, Part I: Journal of Systems and Control Engineering 206(4):263–269

6. Gäfvert M (2016) Modelling the furuta pendulum. Department of Automatic Control, Lund Institute of Technology (LTH)

7. Hamza MF, Yap HJ, Choudhury IA, Isa AI, Zimit AY, Kumbasar T (2019) Current development on using rotary inverted pendulum as a benchmark for testing linear and nonlinear control algorithms. Mechanical Systems and Signal Processing 116:347–369

8. Hennig P (2011) Optimal reinforcement learning for gaussian systems. In: Advances in Neural Information Processing Systems, pp 325–333

9. Izutsu M, Pan Y, Furuta K (2008) Swing-up of furuta pendulum by nonlinear sliding mode control. SICE Journal of Control, Measurement, and System Integration 1(1):12–17

10. Kurode S, Chalanga A, Bandyopadhyay B (2011) Swing-up and stabilization of rotary inverted pendulum using sliding modes. IFAC Proceedings Volumes 44(1):10685–10690

11. La Hera PX, Freidovich LB, Shiriaev AS, Mettin U (2009) New approach for swinging up the furuta pendulum: Theory and experiments. Mechatronics 19(8):1240–1250

12. Özbek NS, Efe MÖ (2010) Swing up and stabilization control experiments for a rotary inverted pendulum—an educational comparison. In: 2010 IEEE International Conference on Systems, Man and Cybernetics, IEEE, pp 2226–2231

13. Quyen ND, Thuyen N, Hoc NQ, Hien ND (2012) Rotary inverted pendulum and control of rotary inverted pendulum by artificial neural network. In: Proc. Natl. Conf. Theor. Phys, vol 37, pp 243–249

14. Rigatos G, Siano P, Abbaszadeh M, Ademi S, Melkikh A (2018) Nonlinear h-infinity control for underactuated systems: the furuta pendulum example. International Journal of Dynamics and Control 6(2):835–847

15. Seman P, Juh M, Salaj M, et al. (2013) Swinging up the furuta pendulum and its stabilization via model predictive control. journal of Electrical Engineering 64(3):152–158

16. Shojaei A, Othman MF, Rahmani R, Rani M (2011) A hybrid control scheme for a rotational inverted pendulum. In: 2011 UKSim 5th European Symposium on Computer Modeling and Simulation, IEEE, pp 83–87

17. Spong MW (1998) Underactuated mechanical systems. In: Control problems in robotics and automation, Springer, pp 135–150

18. Tedrake R (2009) Underactuated robotics: Learning, planning, and control for efficient and agile machines: Course notes for mit 6.832. Working draft edition 3

19. Zhang J, Zhang Y (2011) Optimal linear modeling and its applications on swing-up and stabilization control for rotary inverted pendulum. In: Proceedings of the 30th Chinese Control Conference, IEEE, pp 493–500