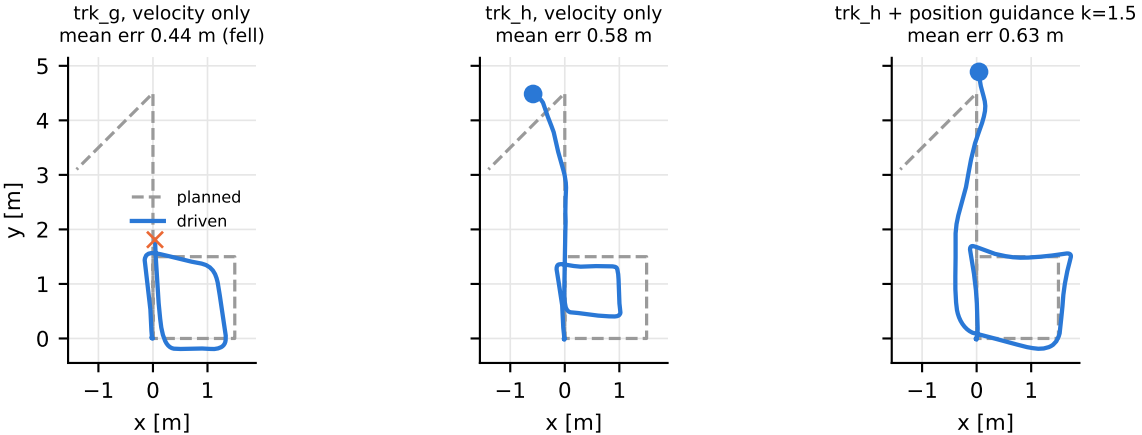
trk_g, velocity only
mean err 0.44 m (fell)
trk_h, velocity only
mean err 0.58 m
trk_h + position guidance k=1.5
mean err 0.63 m
planned
driven
y [m]
x [m]
x [m]
x [m]
5
4
3
2
1
0
−1
0
1