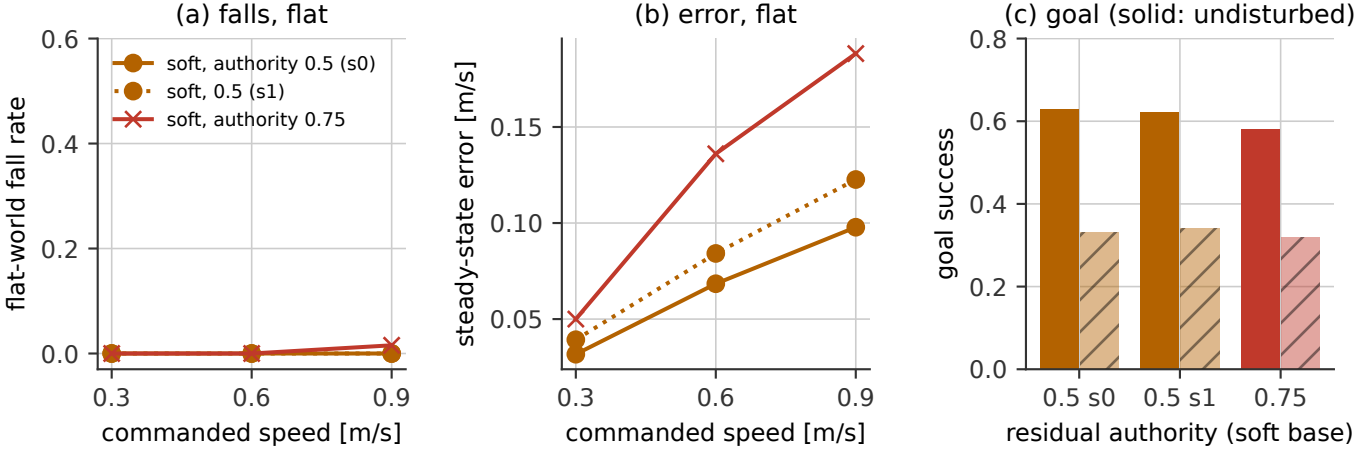
(a) falls, flat
soft, authority 0.5 (s0)
soft, 0.5 (s1)
soft, authority 0.75
flat-world fall rate
0.6
0.4
0.2
0.0
0.3
0.6
0.9
commanded speed [m/s]
(b) error, flat
steady-state error [m/s]
0.15
0.10
0.05
0.3
0.6
0.9
commanded speed [m/s]
(c) goal (solid: undisturbed)
goal success
0.8
0.6
0.4
0.2
0.0
0.5 s0
0.5 s1
0.75
residual authority (soft base)