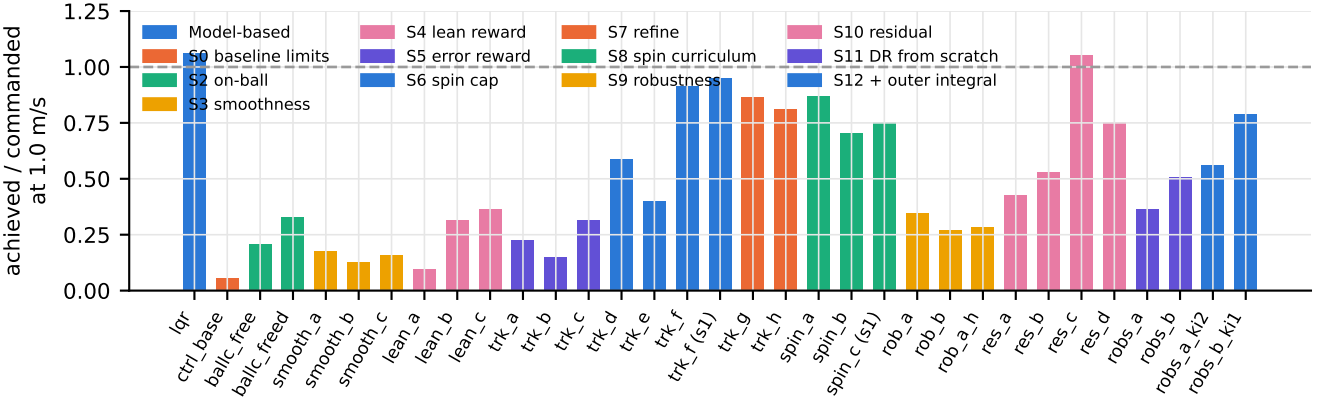
achieved / commanded
at 1.0 m/s
1.25
1.00
0.75
0.50
0.25
0.00
Model-based
S0 baseline limits
S2 on-ball
S3 smoothness
S4 lean reward
S5 error reward
S6 spin cap
S7 refine
S8 spin curriculum
S9 robustness
S10 residual
S11 DR from scratch
S12 + outer integral
lqr
ctrl_base
ballc_free
ballc_freed
smooth_a
smooth_b
smooth_c
lean_a
lean_b
lean_c
trk_a
trk_b
trk_c
trk_d
trk_e
trk_f
trk_f (s1)
trk_g
trk_h
spin_a
spin_b
spin_c (s1)
rob_a
rob_b
rob_a_h
res_a
res_b
res_c
res_d
robs_a
robs_b
robs_a_ki2
robs_b_ki1