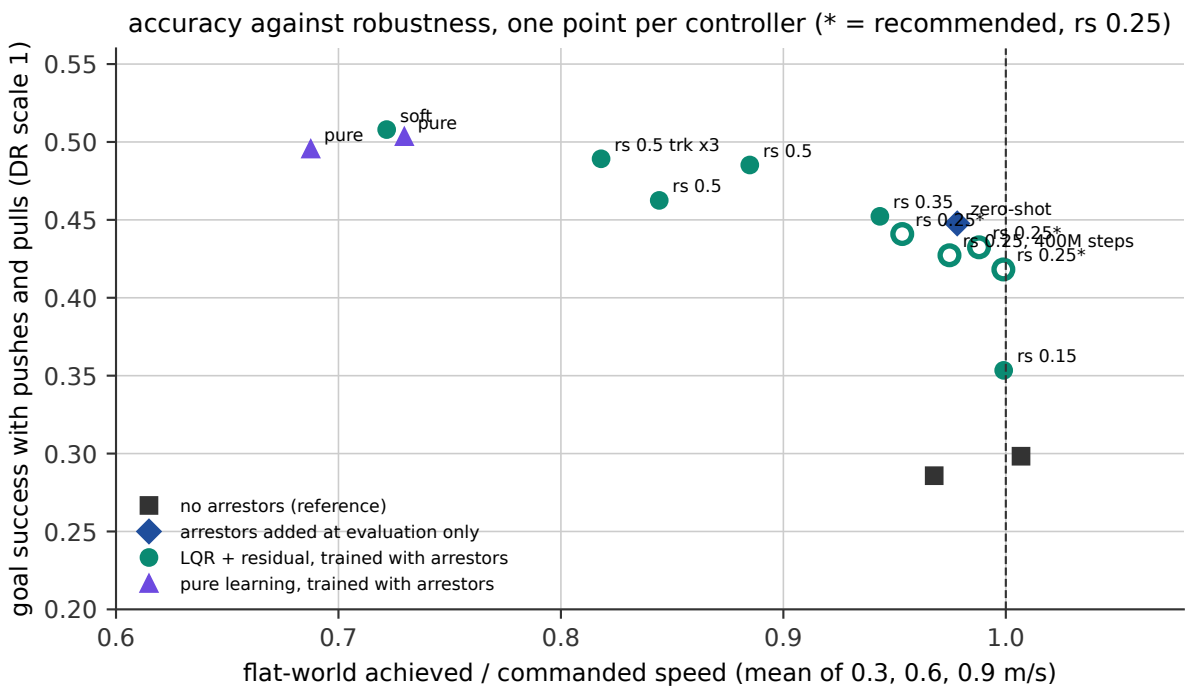
accuracy against robustness, one point per controller (* = recommended, rs 0.25)
goal success with pushes and pulls (DR scale 1)
flat-world achieved / commanded speed (mean of 0.3, 0.6, 0.9 m/s)
0.55
0.50
0.45
0.40
0.35
0.30
0.25
0.20
0.6
0.7
0.8
0.9
1.0
pure
soft
pure
rs 0.5 trk x3
rs 0.5
rs 0.5
rs 0.35
zero-shot
rs 0.25*
rs 0.25*
rs 0.25, 400M steps
rs 0.25*
rs 0.15
no arrestors (reference)
arrestors added at evaluation only
LQR + residual, trained with arrestors
pure learning, trained with arrestors