



	1	2	3	4	5
1					
2					
3					
4					
5					

[illegible]

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99

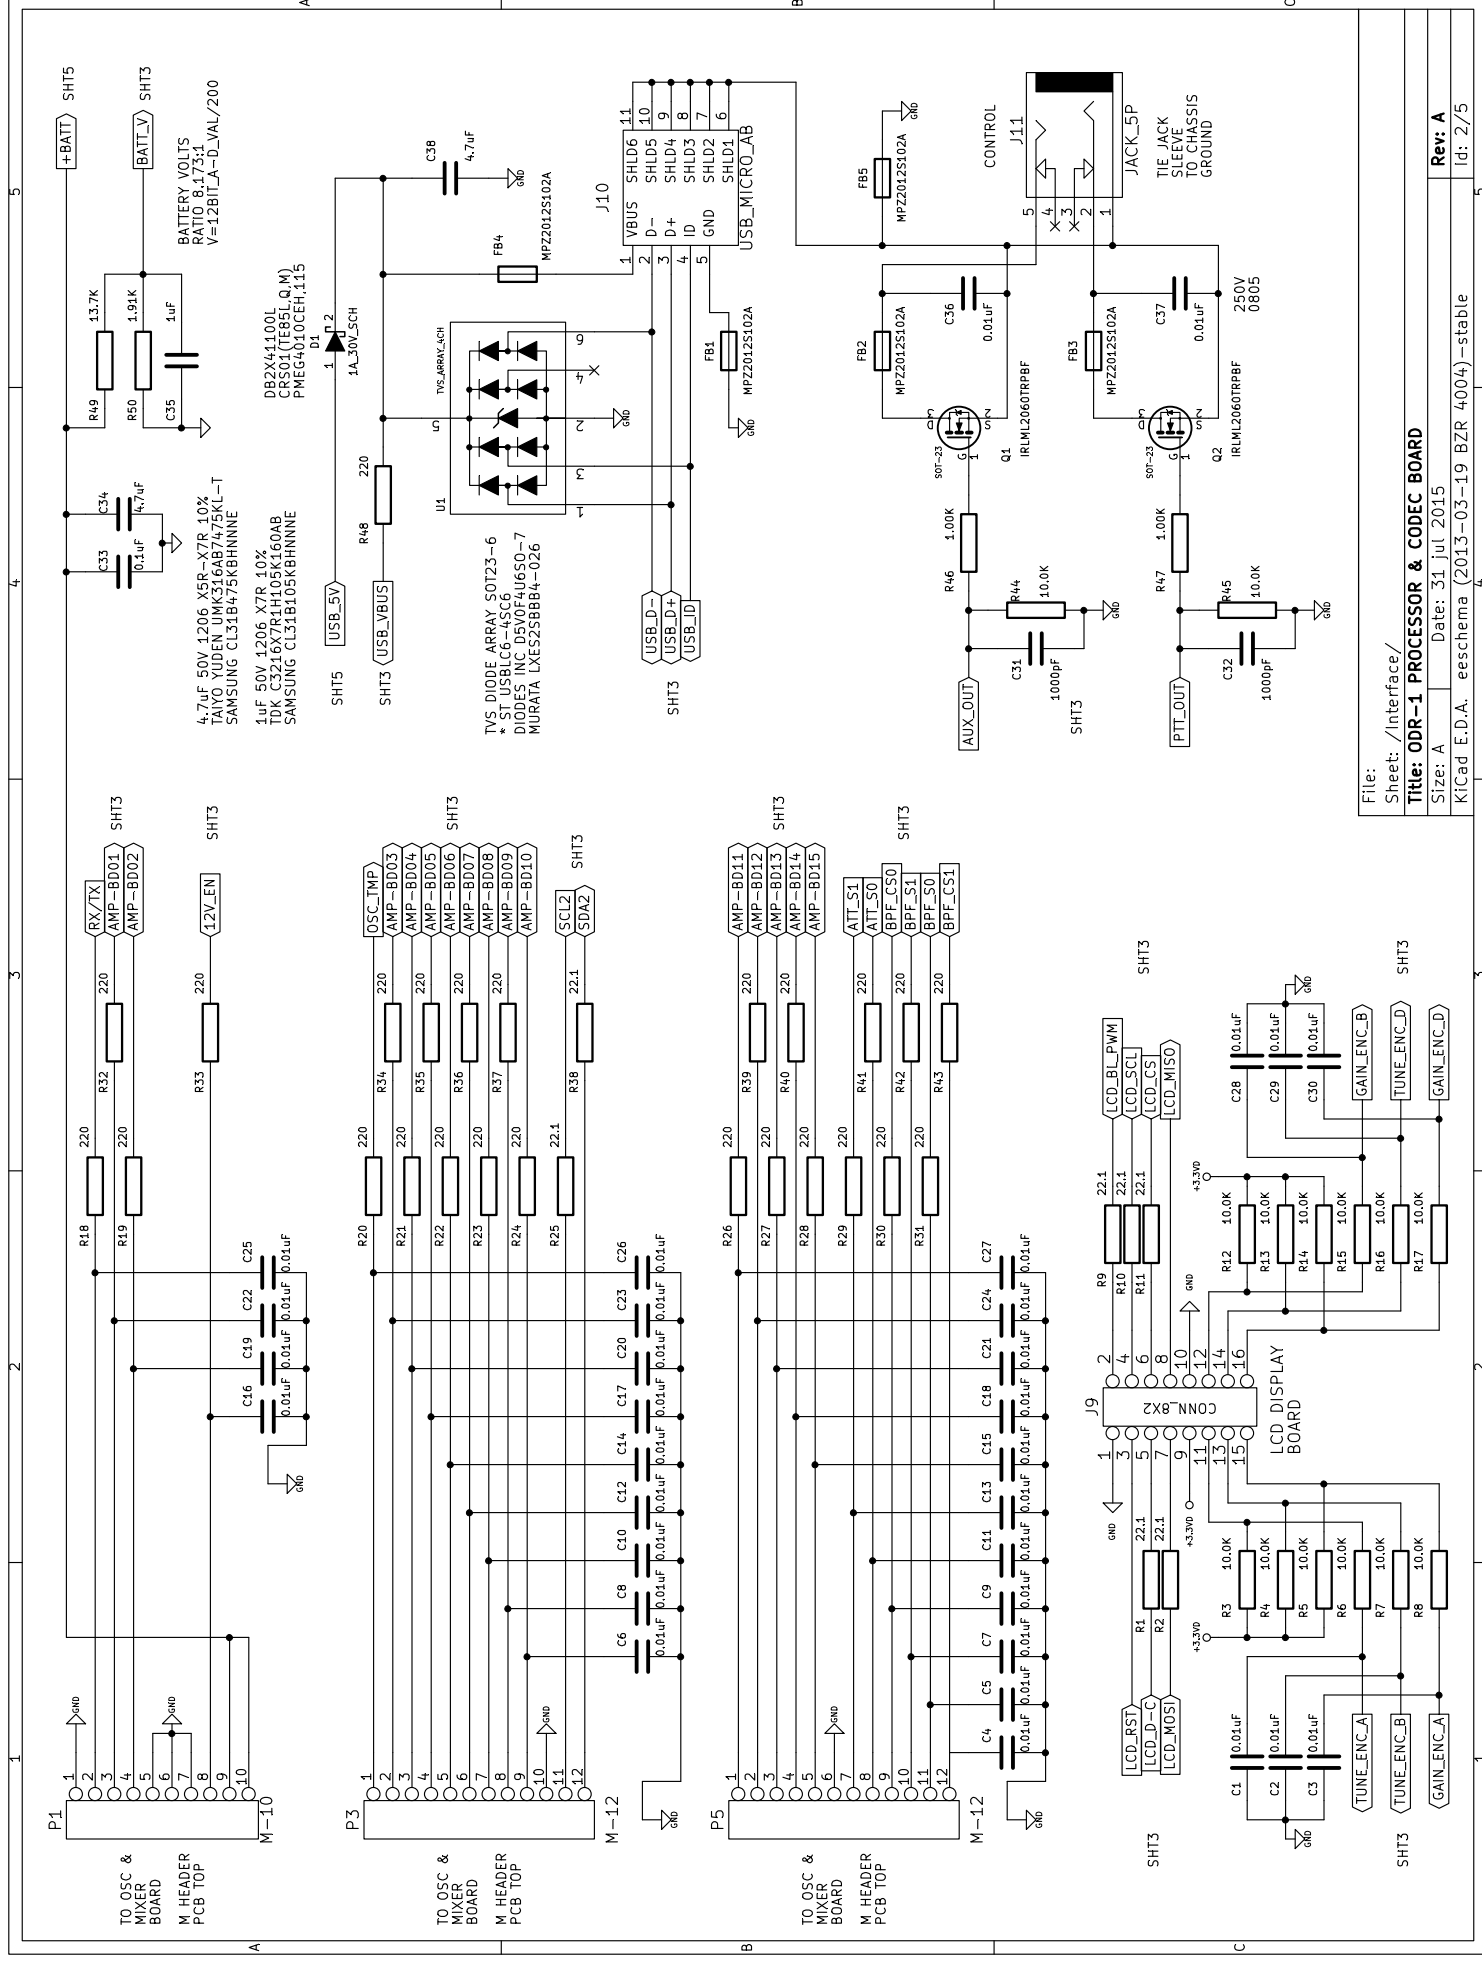

فإنه

Sheet: /Interface/


Title: ODR-1 PROCESSOR &amp; CODEC BOARD


Size: A	Date: 31 jul 2015
---------	-------------------


KiCad E.D.A.	eesschema (2013-03-19 BZR 4004) –stable
--------------	---

Rev: A

Id: 2/5

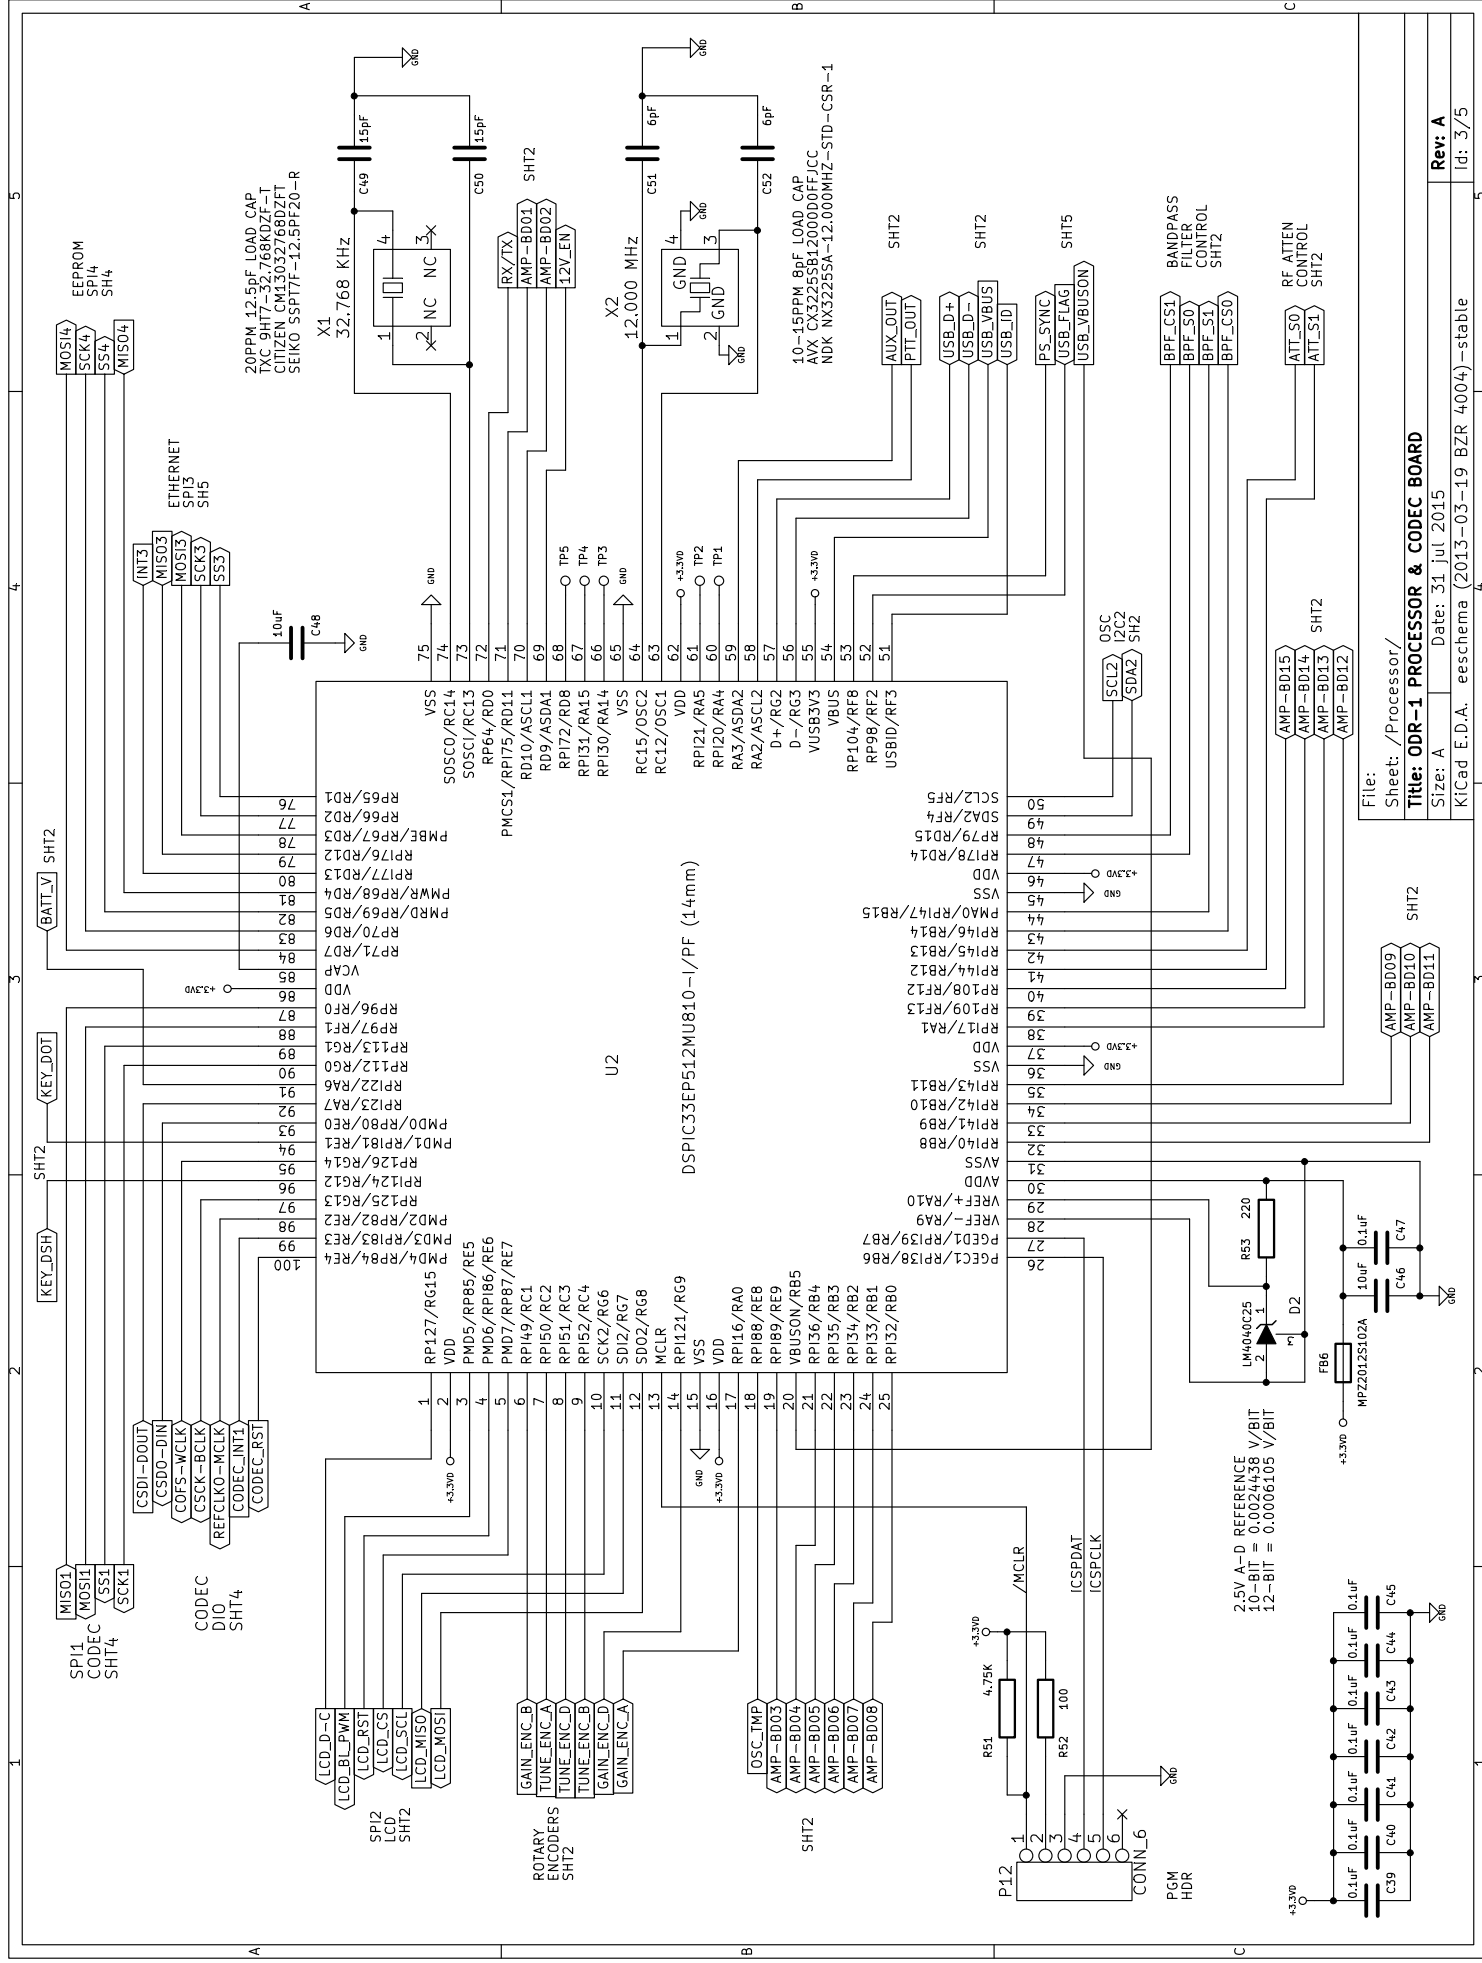

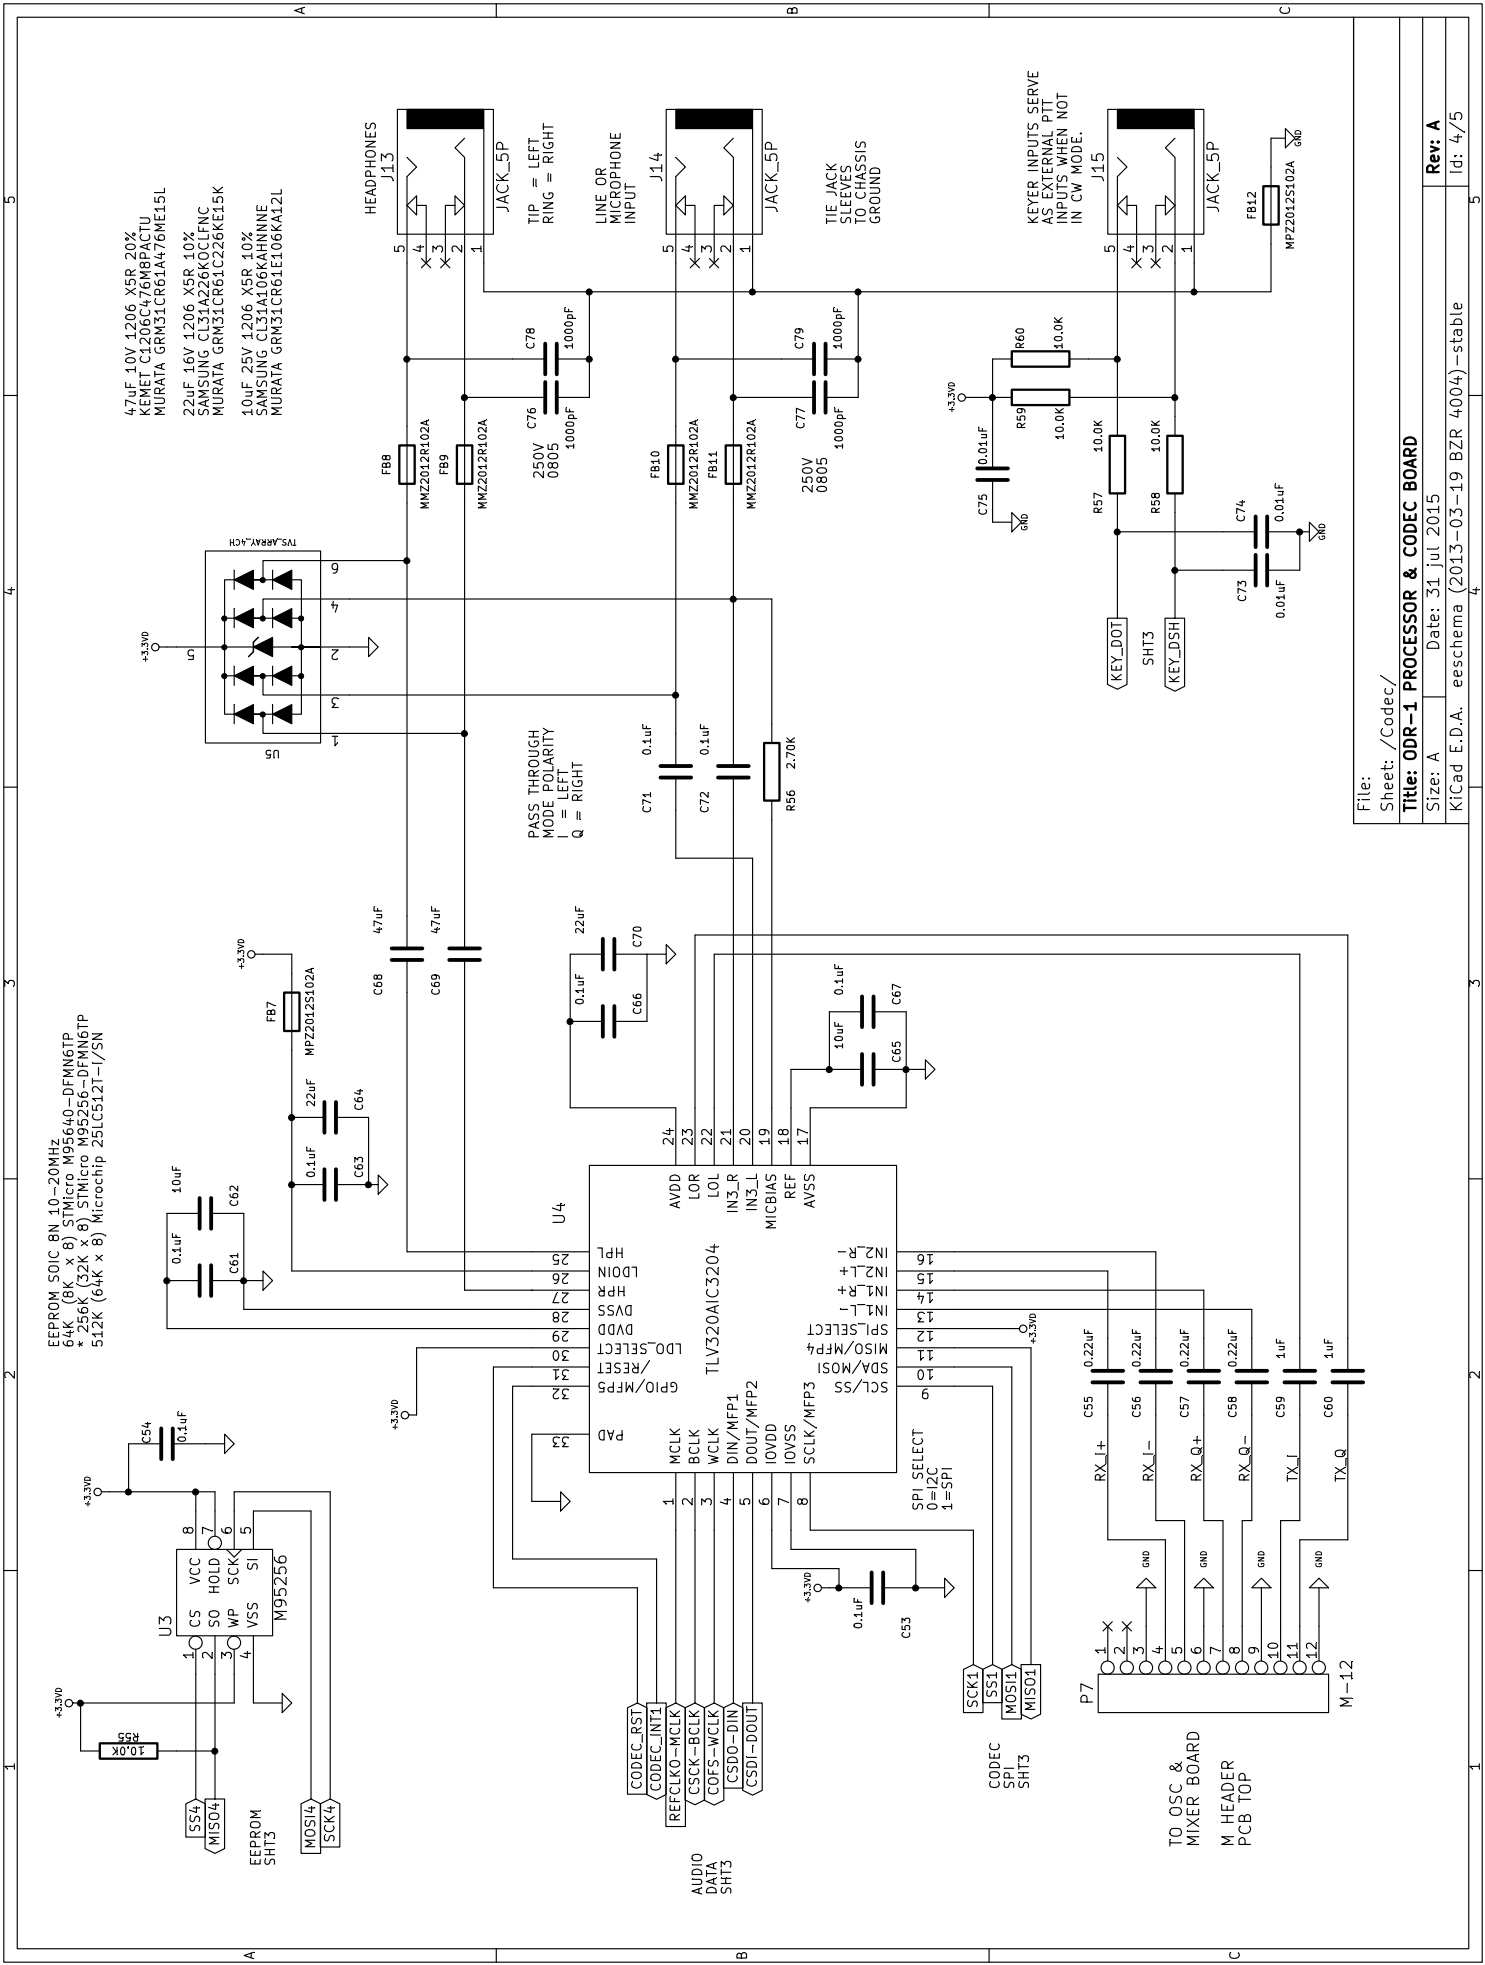

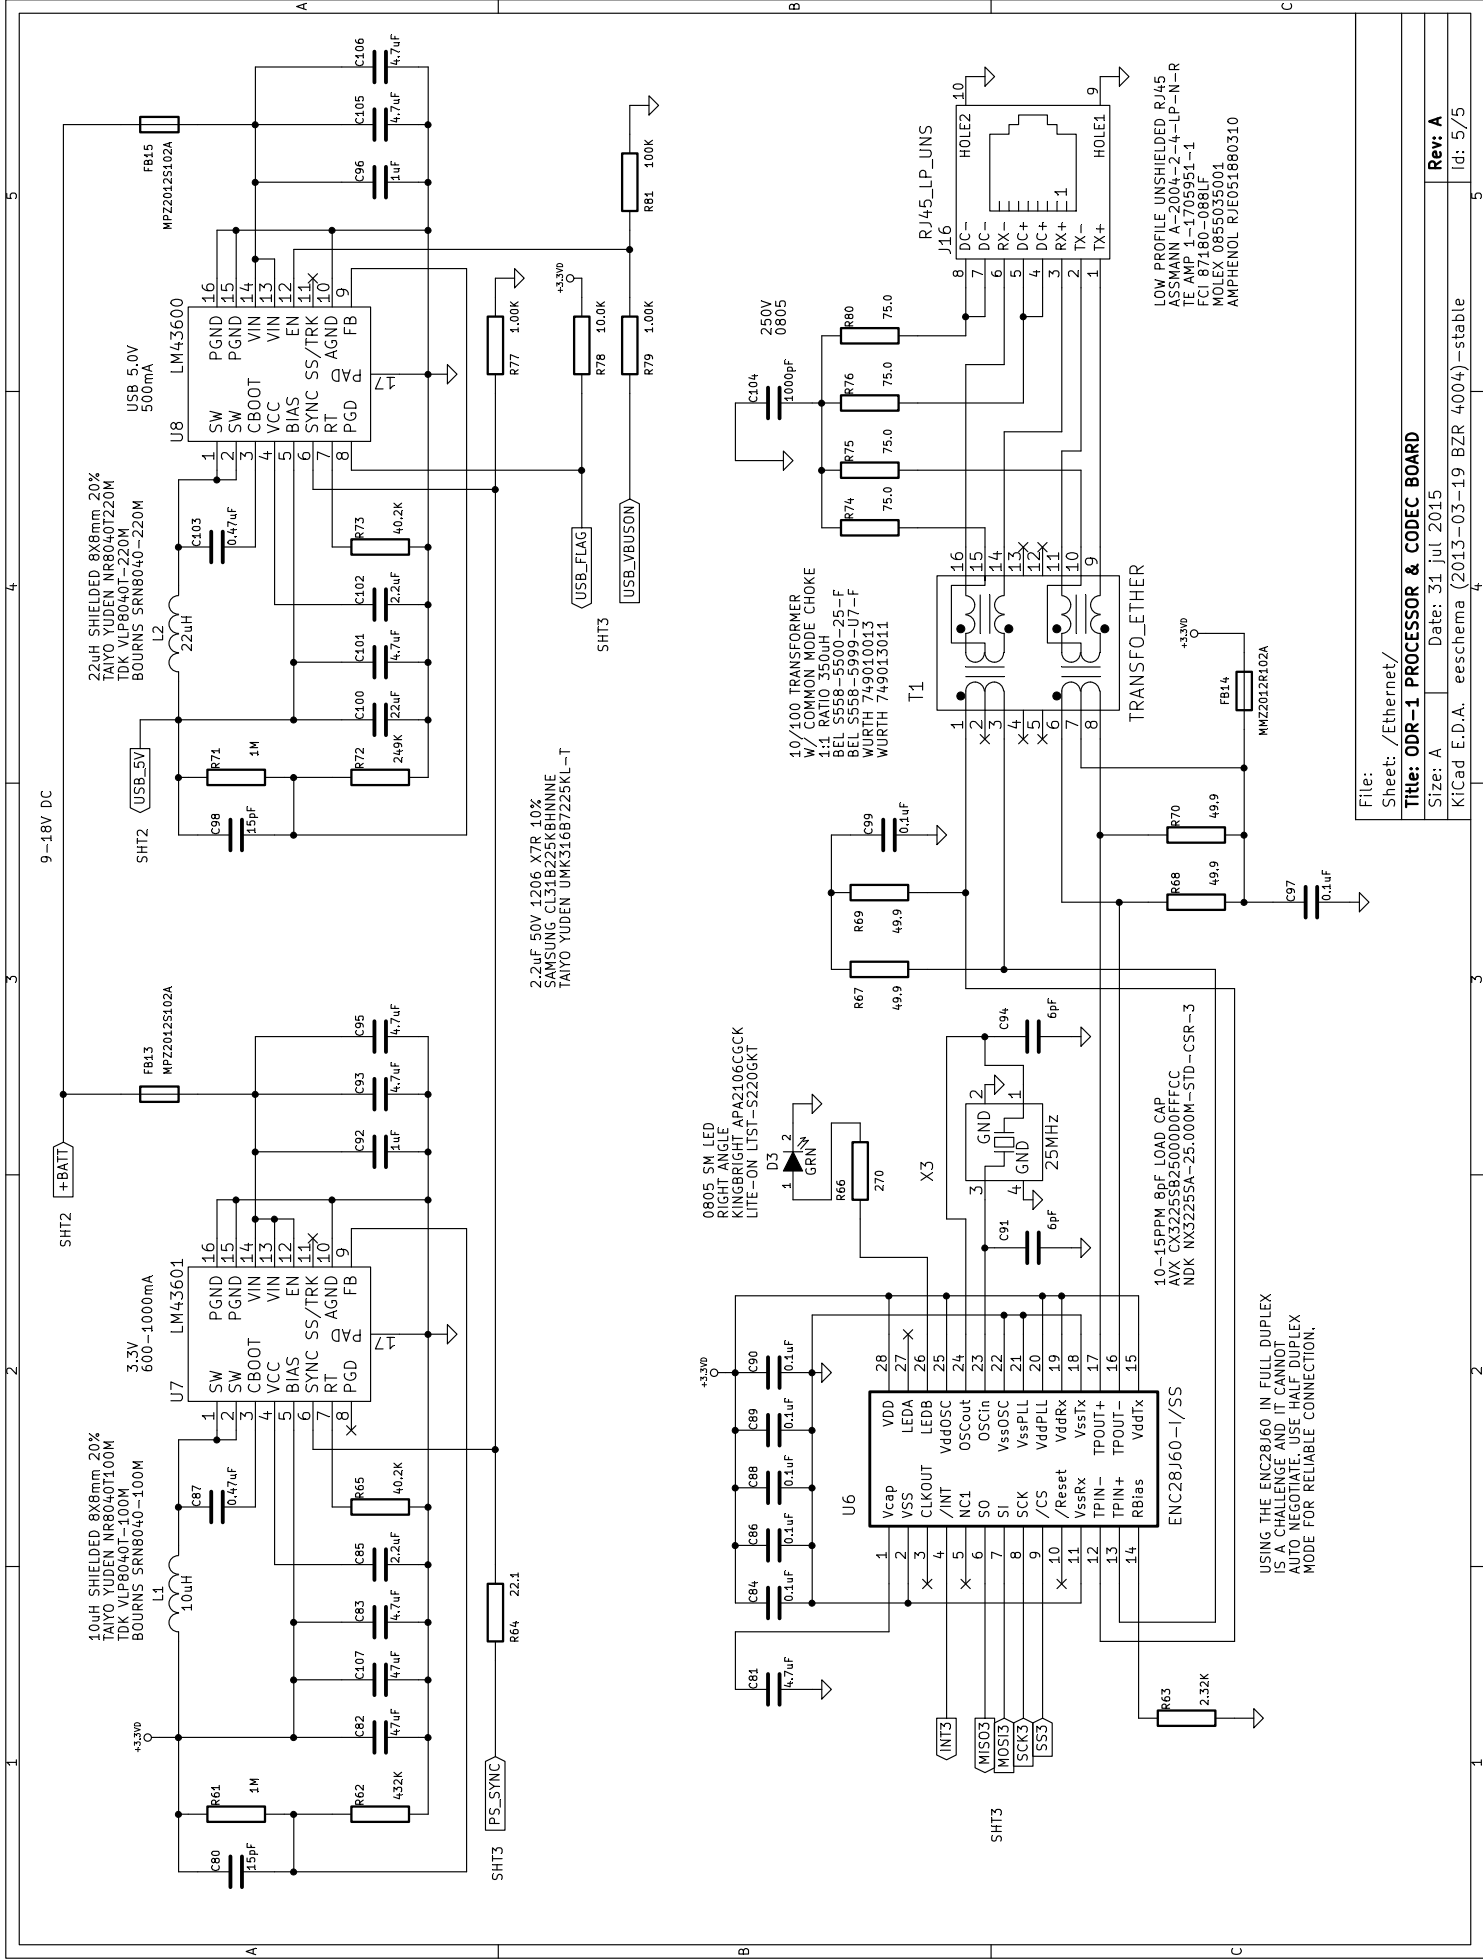

File: /Ethernet/

Sheet: /Ethernet/

Title: ODR-1 PROCESSOR & CODE BOARD

Size: A

Date: 31 Jul 2015

KiCad E.D.A. eeschema (2013-03-19 BZR 4004)-stable

Rev: A

Id: 5/5

USING THE ENC28J60 IN FULL DUPLEX  
IS A CHALLENGE AND IT CANNOT  
AUTO NEGOTIATE. USE HALF DUPLEX  
MODE FOR RELIABLE CONNECTION.