

(a) Same device (E3), different inputs

easier: $s(x)=0.39$



routed



harder: $s(x)=0.70$



routed



(b) Same image, other hardware

E3, budget 19.5 ms




E1, budget 76.2 ms



E1 large route
116.3 ms:
infeasible

(c) ...but routing costs time (E1, large)

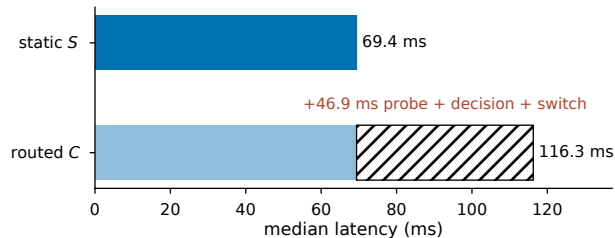

Under mean-cost budgets routing pays off only if this overhead falls below about 4.3 ms on E1 and 1.3 ms on E3 (measured: 44 ms and 1.9 ms); under per-frame budgets static deployment wins at any overhead.