

(a) Same device, different inputs

easier: $s(x)=0.39$



routed



harder: $s(x)=0.70$



routed



(b) Same image, other hardware

AGX Xavier, budget 19.5 ms




Hailo-8, budget 76.2 ms



Hailo-8 large
route 116.3 ms:
infeasible

(c) ...but routing costs time (Hailo-8, large)

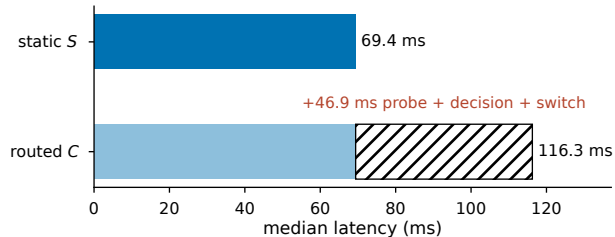

Under mean-cost budgets routing pays off only if this overhead falls below about 4.3 ms on Hailo-8 and 1.3 ms on AGX Xavier (measured: 44 and 1.9 ms); under per-frame budgets static deployment wins at any overhead.