NFJ1175

Tracked Mobile Jaw Crusher

(Diesel Engine-Hydraulic Drive)

"Technical Specification"



Fujian South Highway Machinery Co., Ltd. (NFLG)

Product introduction

NFLG NFJ1175 is a high performance and powerful tracked mobile jaw crusher. NFJ1175 ensures optimal yield in many applications due to the integrated NFLG® JW1175 jaw chamber with heavy-duty vibrating grizzly feeder. With the compact size, quick installation, ease of conveyance and maintenance make the NFJ1175 ideal for quarrying, mining, blasting and recycling applications.

The tracked mobile jaw crusher NFJ1175 is mainly used for crushing and processing medium to high hardness and medium to high abrasive materials such as granite, basalt, and gravel. The onboard diesel engine supports track walking and equipment folding, JW series high-performance jaw crusher, and the powerful vibration feeder. Its maximum throughput capacity in rock processing applications reaches 475 tph.





Tracked Mobile Jaw Crusher NFJ1175
Version 1.0-2023/6/14

Specification

Weight	Standard	51300kg
	Overband magnet (optional) By-pass conveyor (optional)	1000kg 1200kg
Transport Dimensions	Length	14785mm
	Width	2958mm
	Height	3553mm
Working Dimensions	Length	16228mm
	Width (with By-pass conveyor)	4105mm-4907mm
	Height	4596mm
Crusher Type	Single toggle jaw crusher	JW1175
Drive Mode		Diesel engine - Hydrostatic drive
Paint Color	RAL7024 C76.9 M69.37 Y60.4 K21.93	Main frame, auxiliary frame, horn frame and other components
	RAL3020 C41.42 M94.62 Y100 K7.48	Handrails, fences, lifting tools and other components
	PANTONE 3965C	Telescopic outer pipe, cylinder and other moving parts
	RAL9018 R:201 G:204 B:199	Main device color
	RAL9006 R:165 G:165 B:165	Stairs, treads (galvanized or gray silver paint)
	PANTONE 9005C R:6 G:7 B:7	Motors, pumps, reducers, motors, bearing seats
	PANTONGE354C R:69 G:174 B:74	Energy saving label
	Other purchased parts	Original color of purchased parts



Functions and Features:


- JW series high performance jaw crusher chamber, specially developed for mining, quarry, construction solid waste recycling
- The whole machine adopts hydraulic folding design, which can realize the fast switching between the working state and the transportation state
- With the function of overload feed back,it can avoid downtime
- Maximum throughput up to 475tph
- Hydraulic folding receiver hopper with wedge fastening system
- High strength wear resistant feeding system
- Heavy duty vibrating grizzly feeder which the second deck can be fitted with a screen
- Increase the stroke of the swing jaw plate to enhance the crushing capacity
- Fully hydraulic closed side setting adjustment
- Improved reinforced side liners to protect the main frame of jaw chamber
- The main product conveyor discharge height 3500mm
- High-efficiency hydrostatic drive, which can support the reversal of the clearing blockages
- Wireless remote control
- Dust suppression system


Application Scenes:

It is mainly applied to primary crushing and processing of granite, diabase, andesite, basalt and other materials with medium-high hardness and medium-high abrasiveness.

Jaw chamber

Features	■ Fully hydraulic closed side setting adjustment ■ Bi-directional linkage bracket for even stress distribution ■ Strong frame construction, no welding in critical areas ■ One piece fixed jaw support ■ Wear resistant jaw liner design
Type	Single toggle jaw crusher
Feed Inlet	1070mm×762mm
Bearing	Self-aligning spherical roller bearings
Closed Side Setting Adjustment	Hydraulic adjustment
Drive Mode	Hydrostatic-Motor drive
Drive Pulley Diameter	355mm
Jaw Chamber Pulley Diameter	1220mm
Lubrication	Lubricated by grease
Intelligent Controls	When the crusher is overloaded, the feeder automatically stops, the crusher and conveyor still continue to work. When the load decreases, the feeder automatically restarts.

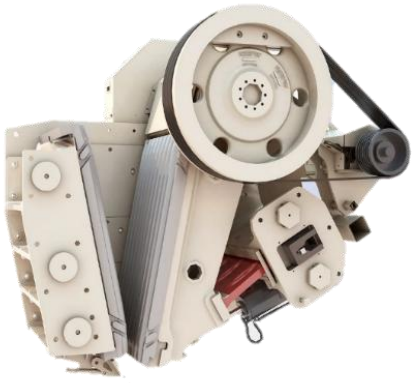

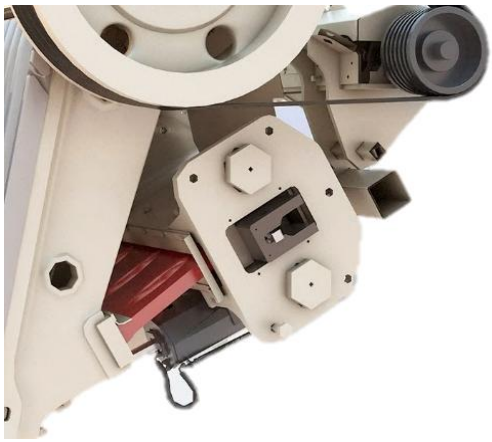

Toggle Optional

Specification	Size	CSS Range	Maximum Discharge Size
Standard Toggle	590mm	75-145mm	120-230mm
Short Toggle	570mm	105-175mm	168-280mm
Long Toggle	610mm	45-115mm	70-180mm

Hopper	
Type	Fixed Hopper
Length	4300mm
Width	2780mm
Capacity	9m³ (Standard)
Feeding Height	4000mm
Material	Wear-resistant steel plates enhance service life
Features	Optional hopper extension plate to expand capacity up to 14m³, hydraulic folding technology, easy to operate, fast switching between working and transporting state.



Feeder	
Type	Heavy duty vibrating grizzly feeder
Length	4220mm
Width	1050mm
Drive Mode	Hydraulic motors drive
Feeding Speed	450-1000rpm
Vibration Exciter	Two high-strength eccentric casting shafts supported by spherical roller bearings, synchronized transmission through gear meshing to provide the required vibration excitation force, adjustable amplitude.
Top Deck (Grizzly)	Single-step grizzly, Length 1650mm
Grizzly Spacing	75mm (Standard) 50mm (Optional) 100mm (Optional)
Bottom Deck (Mesh)	Metal woven mesh
Screen Size	1978×1012mm
Mesh Size	38mm (Standard)




Bypass Chut

Double sided chute to discharge to the main conveyor or by-pass conveyor (if fitted). Constructed from mild steel with a manual tipping gate to guide screened material from the screen to the by-pass conveyor or main conveyor.



Main Conveyor

Specification	B1000-EP200-3×(8+2) -24m Circular Flat Belt With Tear Resistant
Drive Roller Diameter	293mm
Tail Roller Diameter	266mm
Roller Center Distance	11600mm
Discharge Height	3500mm
Stockpile Volume	63m^3
Belt Speed	2m/s
Drive Mode	Hydraulic motors drive
Tension Device	4 Screw adjustment at the tail and the head drum
Lubrication	Bearings are lubricated by grease

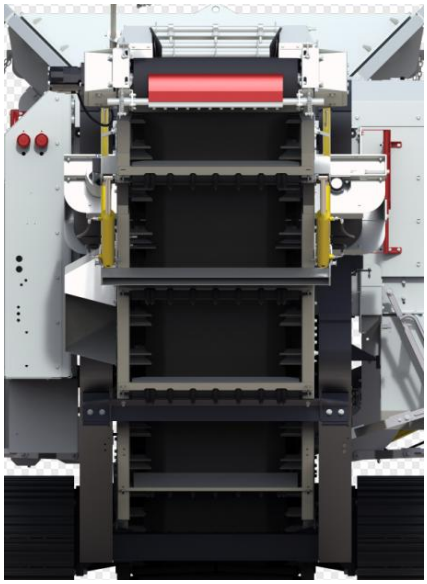


Power Unit and Hydraulic System

Engine	Caterpillar C9.3B Diesel Engine UN ECE R96 stage IIIA
Performance	250 kW (335HP) / 2200rpm
Working Conditions	Standard: -5°C to +40°C Optional: -20°C to +40°C Optional: +10°C to +45°C (Need to change low-temperature ambient oil grease) Note: For use of this equipment in other working environments, please consult NFLG.
Fuel tank	Diesel tank: 430L Hydraulic oil tank: 720L
Hydraulic Pump 1	Gear pump 46 /46 cc/rev Section 1: 46 cc/rev： Feeder Section 2: 46 cc/rev： Main conveyor
Hydraulic Pump 2	Gear pump 33 cc/rev By-pass conveyor/Overband magnet Parts folding/Jaw chamber puller
Hydraulic Pump 3	Gear pump 125/125 cc/rev Jaw chamber
Motor	Jaw chamber: 355 cc/rev Vibrating feeder: 85 cc/rev The main conveyor: 630 cc/rev By-pass conveyor: 500 cc/rev Overband magnet: 200 cc/rev Track : 90cc/rev
Features	Caterpillar diesel engine which is known as strong power, high efficiency and stability, high transmission efficiency, low failure rate





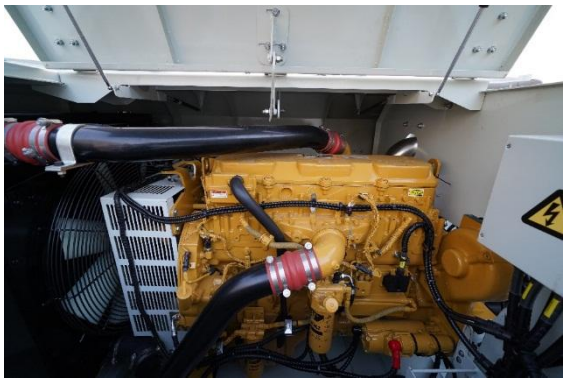




Track Moving Module

Type	Heavy track
Center Distance	3720mm
Width	500mm
Gradient	25º (Maximum)
Speed	1.66km/h (High speed)
Tension Device	Grease tension adjustment



Protection

- All motors, flywheels, pulleys and couplings are covered with wire mesh or metal housing.
- Protective devices designed and manufactured in accordance with CE and ANSI standards.
- Hinged shields mounted to the top, sides and ends of the engine

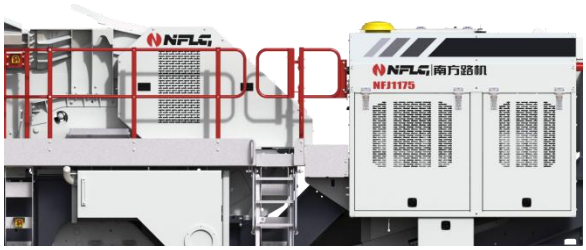

Maintenance Platform

The platform provides inspection and maintenance space with access to the engine and jaw chamber side.

All platforms are galvanized as standard and constructed from steel floor and steel skirting panels, double row handrails walkway ladders.



Control

PLC Control Panel

Full system diagnostics and monitoring.
The main functions of the panel control include:

- Automatic sequence start/stop
- Vibrating feeder start/stop
- Vibrating feeder speed control
- Engine speed control
- Turn on/off tracking mode
- Jaw chamber css control



Remote control

Equipped with wired and wireless remote controls to control crawler walking and auxiliary equipment operation

- Control crawler walking
- Control the start and stop of the feeder
- Control the start and stop of the whole machine

Can only be used if permitted by local policies.





Hot/Cold Climate Oils

- Cold climate oils - (recommended for ambient temperatures between -25 ~ +40°C)
- Hot climate oils - (recommended for ambient temperatures between +10 ~ +45°C)



Dust Suppression System

The pipeline with atomizing nozzles are installed above the crusher inlet and outlet, discharge area of the main conveyor, With atomizing nozzles connected to the pump via a line to provide pressurized water to the system.




Frame/Chassis

High-strength steel welded structure ensures equipment stability and easy inspection and maintenance.



The Bottom Deck (Mesh) Of Vibrating Feeder

Removable screens mounted on standard rubber dampening mats for use with optional by-pass conveyors

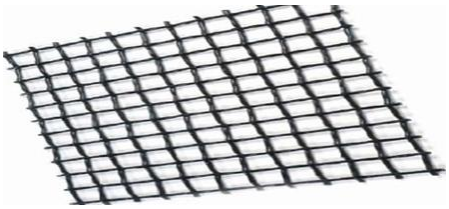

Re-bar Deflector Plate


In construction waste application scenarios, it can effectively bend sharp materials such as steel bars to protect the belt conveyor, with adjustable working angle (screw adjustment).



Jaws type


■ **S Teeth Jaws（Standard）**

Suitable for rock, pebbles and some recycled material applications. S teeth shape make the contact area increased, which can better "grab" the material and increase the output. It is not suitable for highly abrasive materials.

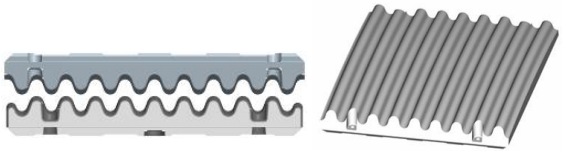


■ **Quarry Teeth Jaws(Optional)**

Suitable for the crushing of rocks and pebbles, with long wear life, good balance between working power and extrusion stress, high wear life for materials with strong abrasiveness and high hardness, and moderate production capacity.

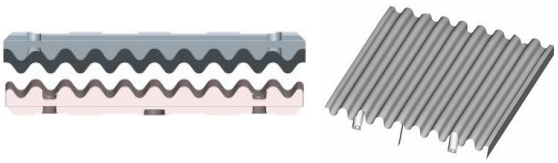

■ **Solid Waste Recycling Jaws (Optional)**

Suitable for scrap and recyclable material requiring smaller CSS. Good grip on smooth concrete. Not suitable for highly abrasive or high hardness materials.

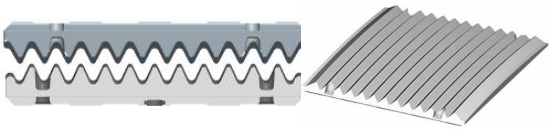

Hopper Extensions (Optional)

Type	Hydraulic folding extension hopper with central support and wedge
Length	4600mm
Width	4000mm



By-pass Conveyor (Optional)

Specification	B650-EP150-3×(5+1.5)-7.5m Circular Flat Belt (Standard) B650-EP150-3×(5+1.5)-11.35m Circular Flat Bel (Extend length)
Roller Center Distance	3225mm (Standard) 5216mm (Extend length)
Drive Roller Diameter	293mm
Tail Drum Diameter	266mm
Discharge Height	2000mm (Standard) 2800mm (Extend length)
Drive Mode	Hydraulic motor drive
Belt speed	Adjustable speed
Features	The head of belt conveyor can be hydraulically folded The baffle rubber can be completely sealed to eliminate material leakage






Overband Magnet (Optional)


Type	Self-discharging permanent magnetic separator
Belt width	800mm
Roller Center Distance	1570mm
Discharge Direction	Right side discharge
Hanging Height (Above the conveyor)	250mm
Drive Mode	Hydraulic motor straightly drive



Working Dimensional

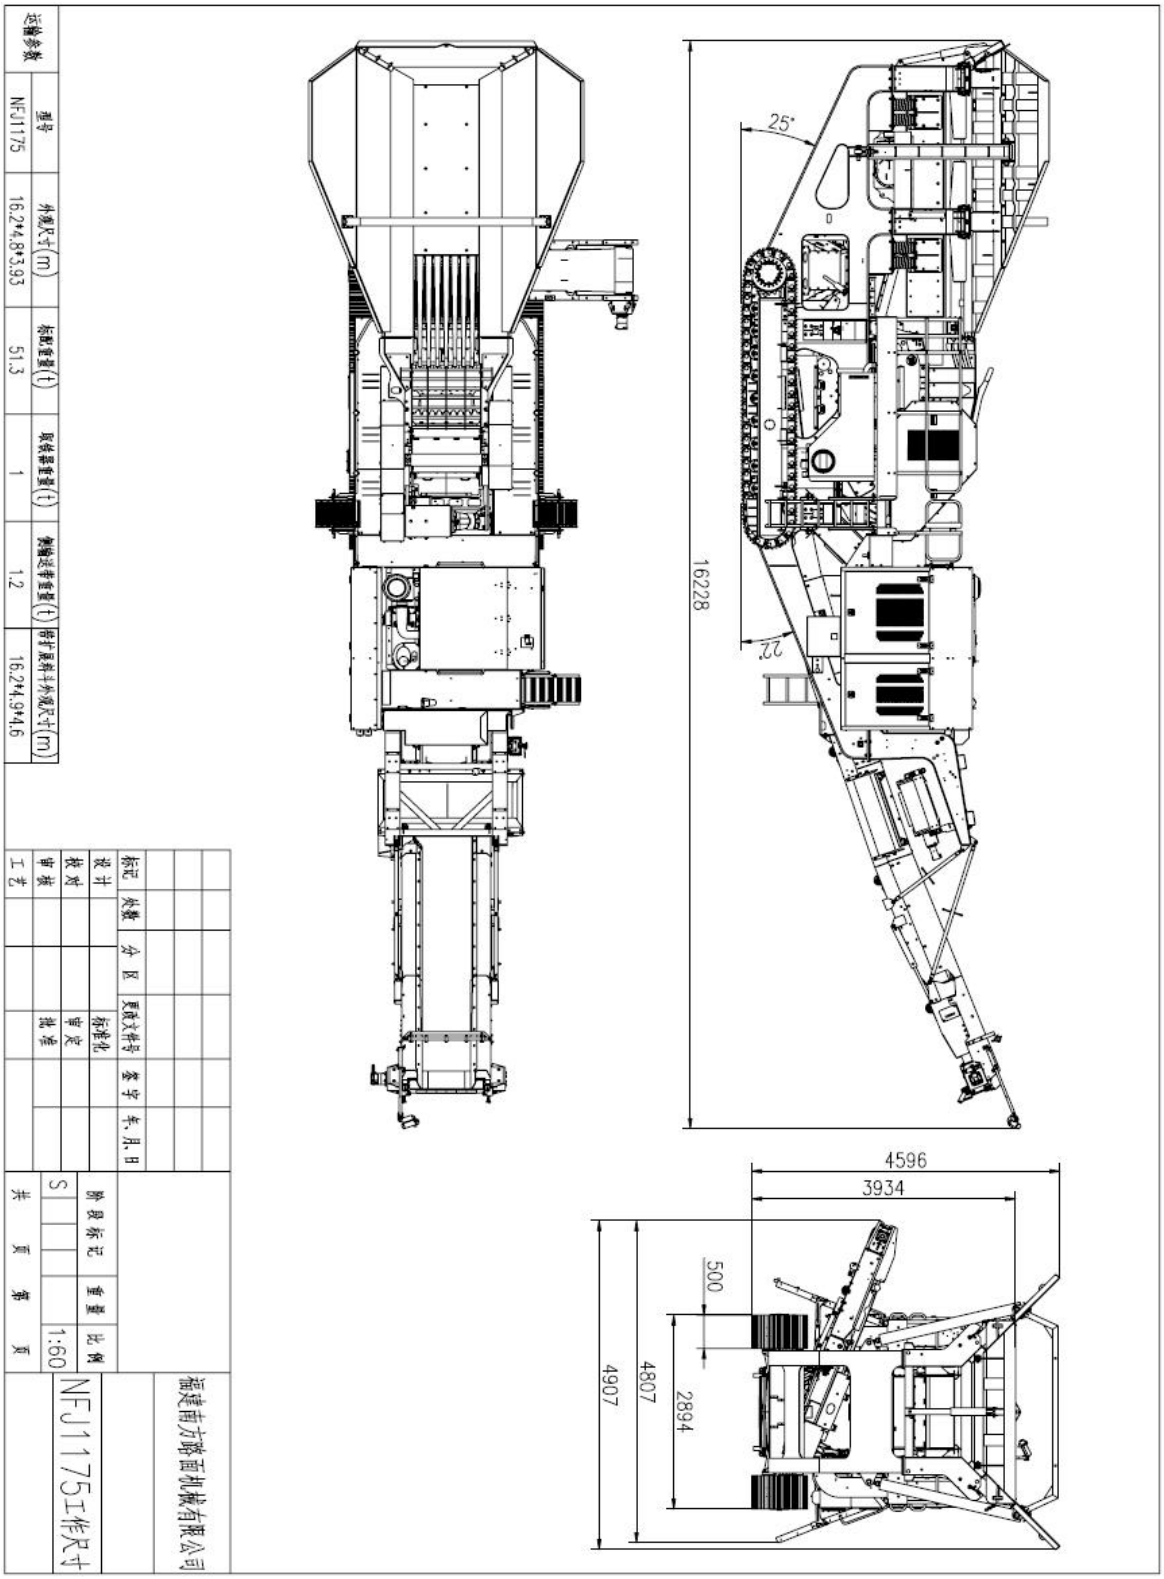

Transportation Dimensional

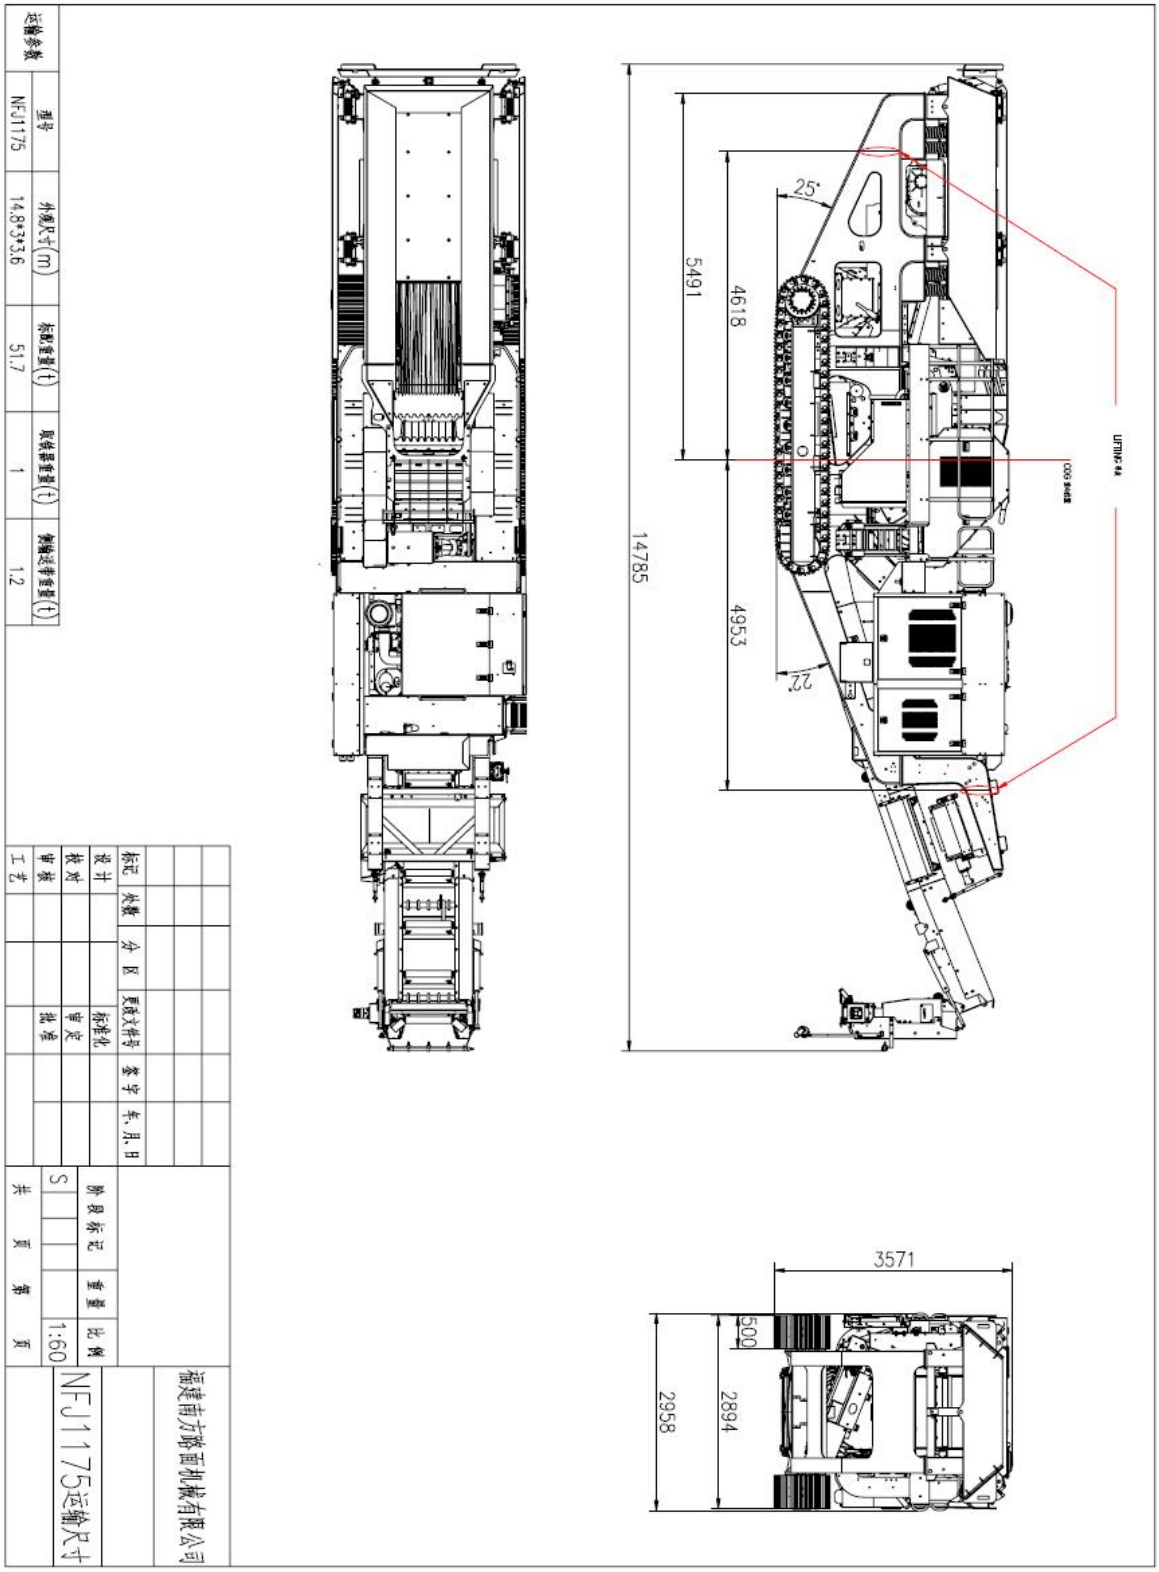



Introduction to NFLG Mobile Crusher

NFLG introduced the world's most advanced mobile crusher and screen technology in 2010. After decades of research, absorption, application and re-innovation, it has become a leading company in the complete solutions of mine rock and mineral crushing, aggregate processing, pre-crushing of asphalt concrete recycling, and construction waste recycling and crushing.

NFLG's full product line includes: mobile tracked jaw crusher, mobile tracked cone crusher, mobile tracked impact crusher, mobile tracked inclined aggregate screen, mobile tracked inclined heavy-duty screen and tracked mobile horizontal screen. In addition, we also provide a full range of stationary and frame crusher and screen and solutions according to the actual needs of users.

In line with the principle of customer first, supported by decades of industry experience and perfect product series, NFLG provides users with more efficient, economical and energy-saving solutions, minimizes users' purchase costs and use costs, and improves users' return on investment by comprehensively considering the actual production needs of users, the frequency of equipment movement, the power source of the construction site, and the quality of the construction site operators.

NFLG provides not only high-quality products, but also complete pre-sales and after-sales services. The dealers and after-sales service personnel all over the country will be dedicated to serving every aspect of your operation. From the equipment selection, production process, equipment debugging, personnel training, and maintenance in the early stage, to the extension of the service life of the equipment and the reduction of the operating cost of the production line in the later stage, NFLG will make every effort to protect the efficient operation of your production line!