
I2C waveform

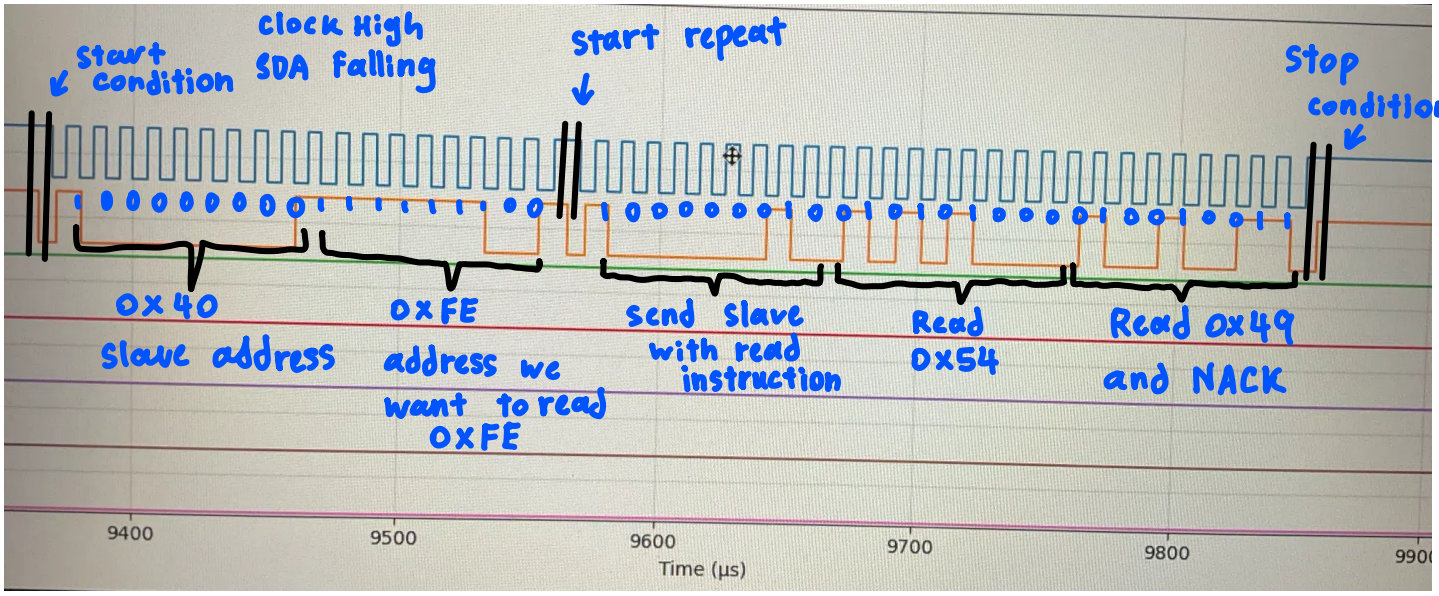

Ack = 0

NACK = 1

// Every I2C byte takes 9 clock Pulse (Pulse 9 is the acknowledge)


0x40	0xFE	0x54	0x49
0100 0000	1111 1110	0101 0100	0100 1001
1000 0000			

Start condition : SDA Falling while Clock High

Stop condition : SDA Rising while clock High

SPI Waveform (Transmit 0xAA)

CPOL = 0 , CPHA = 0

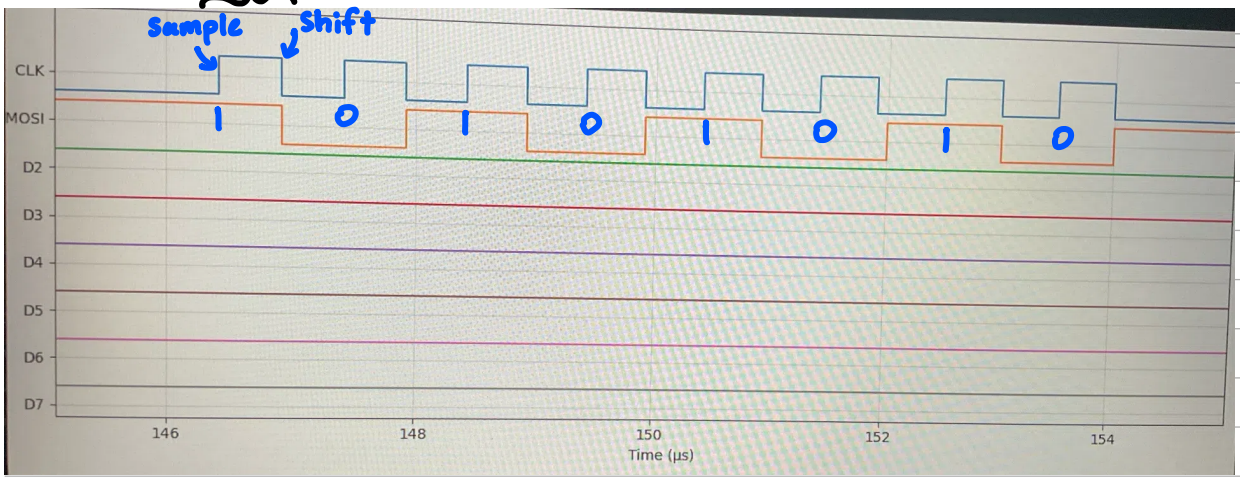

0xAA

1010 1010